



KDC User Manual

Rev 2.85T.A4 (KDC20/30/410/411/415/420/421/425/430)

3.x7.A4 (KDC100/200/250/270/300/350/450/470)

A01.05.08 (KDC500)

Table of Contents

1. INTRODUCTION	20
1.1 KDC Package Contents.....	21
1.2 KDC Characteristics.....	23
1.3 Keypad Functionality for KDC350	27
1.4 Keypad Functionality for KDC500	29
1.5 Input data by using a keypad (KDC350).....	30
1.6 Turn on the power of KDC20/30/270/350/400/470/500	31
2. INSTALLATION	33
2.1 Bluetooth Pairing	33
Preparing for Pairing	33
Pairing	35
2.2 KOAMTAC Installation Wizard.....	40
Windows 7, 8 & 10	40
Android	42
iPad/iPhone/iPod Touch	42
3. OPERATING YOUR KDC	43
3.1 Getting Started	43
Attaching a Lanyard or Hand Strap to a KDC.....	43
Charge KDC Battery.....	44
Configure KDC	44
3.2 Basics.....	46
Reading Barcodes	46
Read Barcodes with GPS Coordinates (KDC250G/350G).....	47
Reading HF RFID Tags (KDC450/470)	48
Inputting Data by Using a Keypad (KDC350).....	48
Read Magnetic-Stripe (MS) Card(KDC500)	48
Read Integrated Chip (IC) Card(KDC500)	49
Synchronizing data to the host device	49
3.3 KDC Menu.....	50

KDC Mode Menu	70
View Data Menu	71
Set Barcodes Menu	71
Code Options Menu	71
Scan Options Menu.....	71
Data Process Menu	74
BT Config Menu – KDC20/30/200/250/270/300/350/400/470/500.....	80
BT Service Menu – KDC20/30/200/250/270/300/350/400/470/500	82
GPS Config Menu – KDC250G/350G	82
USB Mode Menu– 100M/200M/250M/270/300M/350	83
NFC Config Menu – KDC350N/411N/415N/421N/425N/500	84
UHF Config Menu – KDC450U	84
WIFI Config Menu (KDC350F)	85
MSR Config Menu – KDC415/425/430/500.....	86
ICCR Config Menu – KDC500.....	88
SystemConfig Menu.....	88
Key Mgmt Menu– KDC500	91
Sensitive Menu – KDC500.....	91
3.4 LED Status.....	93
3.5 Empty Battery.....	94
KDC100/200/250/270/300/350.....	94
KDC20/30/400/470	94
KDC500	94
3.6 Buffer Full	95
3.7 Reset Feature (100/200/250/300) or Power-on/off (KDC20/30/270/350/400/470/500)	96
3.8 Replace Battery	97
4. BLUETOOTH -KDC20/30/200/250/270/300/350/400/470/500	101
4.1 Bluetooth Config.....	101
Connect Device	101
Auto Connect	102
Auto Reconnect.....	102
Auto Power On.....	102
PWR ON Time	102
Auto Power Off	103
Beep Warning	103
PWR OFF Time.....	103
PowerOFF Msg	103
MAC Address	103
FW Version	103

Wakeup Nulls	104
Autolock Time	104
HID Keyboard.....	104
HID Initial and Inter-Character Delay	104
Control Character Transmission in HID mode.....	104
Function Key Transmission in HID mode	105
Disconnect/Reconnect/BT(HID) Toggle	105
4.2 Bluetooth Service	106
Power.....	106
Pairing.....	106
Discovering.....	107
Connect To	107
HID Sync.....	107
Tips.....	107
Auto Pairing	108
5. SYNCHRONIZATION.....	109
5.1 KTSync Menu	109
5.2 File Menu	112
Connect to KDC	112
Synchronize.....	112
Erase KDC Memory.....	112
Bluetooth	113
Configuration.....	113
Synchronization Settings	115
Destination of Data	115
Synchronization Methods	116
Current KDC Wedge Method.....	117
Synchronization Options	117
Application Options	118
5.3 Barcode & KDC Settings	119
Select Symbologies and Symbology Options	119
Data Editing Option	120
5.4 Other Settings.....	121
5.5 Mobile pKTSync	123
5.6 Android aKTSync.....	124
KDC and Android Pairing	124
Launch KTsync.....	124

Keyboard Wedge	126
5.7 iPad/iPhone/iPod Touch KTSync.....	127
KDC20i/30i/200i/250i/270i/270i/350i/400i/470i/500i connection using MFi mode	127
iKTSync Settings	127
How to Connect and Reconnect MFi Mode using UP Keys	128
How to use Keyboard Wedge with iKTSync	128
5.8 Blackberry bKTSync.....	130
5.9 KTSync for Mac OS X	132
Connect Button	133
Disconnect Button.....	133
Synchronize Button	133
Clear Button.....	133
Settings Button	133
6. APPLICATION GENERATION.....	137
6.1 Application Generation.....	138
Generate Application.....	138
Data Filter Settings.....	139
Application Download and Execution	141
6.2 Predefined Applications.....	142
Master/Slave	142
Pick/Bin	143
DB Lookup Application.....	146
Inventory Application	147
7. TROUBLESHOOTING.....	149
8. WARRANTY.....	151
9. CONTACT INFORMATION.....	152
10. APPENDIX A – BARCODE & SCAN OPTIONS	153
10.1 Symbologies.....	153
Bookland EAN vs. EAN-13.....	153
Add-on Symbologies	154
10.2 Code Options (KDC20/100/200/250/270L/270D/410/411/415/470L/470D)	156

Reverse Direction	156
Symbology Conversion	156
Verification of Optional "Check Digit"	157
Transmission of "Check Digit"	158
Resolution of Inconsistencies	158
10.3 Miscellaneous Barcode Information.....	160
Height of a Linear Barcode.....	160
Check Characters	160
Prevent Interleave 2 of 5 Partial Reading	160
Data Buffer Full.....	161
11. APPENDIX B –FAQ.....	162
11.1 Symbology	162
11.2 Host Interface.....	163
11.3 Battery.....	164
11.4 Memory	165
11.5 Programming	166
12. APPENDIX C – 1D SPECIAL BARCODES (KDC20/100/200/250/270L/270D/350L/410/415/470L/470D).....	167
12.1 Set Symbologies	167
12.2 Barcode Options.....	170
12.3 Delete Last Scanned Barcode.....	173
12.4 Scan Options.....	174
12.5 Scan Timeout	175
12.6 Minimum Barcode Length.....	176
12.7 ScanIfConnect	179
12.8 Security Level(Laser model only)	180
12.9 Data Process - Wedge/Store, Enter Key & Extend Key.....	181
12.10 Data Process - Data Edit	182

12.11	Data Process - Data Format and Handshake	183
12.12	Data Process - Termination Character & Duplicate Check	184
12.13	Data Process - Termination Character & Duplicate Check	185
12.14	Bluetooth Auto Power On Time.....	188
12.15	Bluetooth Power Off Time	189
12.16	HID Auto Lock Time	192
12.17	HID Keyboard.....	193
12.18	HID Initial Delay.....	194
12.19	HID Character Delay	195
12.20	HID Control Character	196
12.21	System.....	197
12.22	Sleep Timeout.....	202
12.23	ETC.....	203
12.24	Function	204
12.25	Number	205
12.26	Lower Case Alphabet.....	206
12.27	Upper Case Alphabet.....	208
12.28	Control Character.....	210
12.29	Symbol Character.....	211
12.30	GPS (GPS Model Only).....	214
12.31	GPS/BT Auto Power Off Timeout.....	215
12.32	NFC (NFC Model Only).....	216
12.33	USB Disk (M Model Only)	217
12.34	USB DM Button(KDC20/20D Only).....	218
12.35	WiFi (WiFi Model Only)	219

12.36	Multilanguage	221
13.	APPENDIX D – 2D SPECIAL BARCODES	
	(KDC30/270C/300/350C/420/425/450/470C)	222
13.1	Set Symbologies	222
13.2	Barcode Options.....	222
13.3	Delete Last Scanned Barcode.....	222
13.4	Scan Options.....	223
13.5	Scan Timeout	224
13.6	Minimum Barcode Length (except KDC30).....	225
13.7	Image Capture (except KDC30)	228
13.8	ScanIfConnect.....	229
13.9	Data Process - Wedge/Store, Enter Key & Extend Key.....	230
13.10	Data Process - Data Edit	231
13.11	Data Process – Data Format & Handshake	232
13.12	Data Process - Termination Character & Duplicate Check	233
13.13	Bluetooth.....	234
13.14	Bluetooth Auto Power On Time	237
13.15	Bluetooth Power Off Time	238
13.16	HID Auto Lock Time	241
13.17	HID Keyboard.....	242
13.18	HID Initial Delay.....	243
13.19	HID Character Delay	244
13.20	HID Control Character	245
13.21	System.....	246
13.22	Sleep Timeout.....	251

13.23	Function	252
13.24	Number	253
13.25	Lower Case Alphabet.....	254
13.26	Upper Case Alphabet.....	256
13.27	Control Character.....	258
13.28	Symbol Character.....	259
13.29	GPS (GPS Model Only).....	262
13.30	GPS/BT Auto Power Off Timeout.....	263
13.31	NFC (NFC Model Only).....	264
13.32	UHF (UHF Model Only)	265
13.33	USB Disk (M Model Only)	268
13.34	USB DM Button(KDC30 only)	269
13.35	WiFi (WiFi Model Only)	270
13.36	Multilanguage	272
14.	APPENDIX E - MSR SPECIAL BARCODES (KDC415/425MSR)	273
14.1	KDC415MSR	273
14.2	KDC425MSR	276
15.	APPENDIX F – 1D SPECIAL BARCODES (500L)	279
15.1	Set Symbologies	279
15.2	Barcode Options	282
15.3	Delete Last Scanned Barcode	285
15.4	Scan Options.....	286
15.5	Scan Timeout	287
15.6	Minimum Barcode Length.....	288

15.7	ScanIfConnect	291
15.8	Data Process - Wedge/Store, Enter Key & Extend Key.....	292
15.9	Data Process - Data Edit	293
15.10	Data Process - Data Format	294
15.11	Data Process - Termination Character & Duplicate Check	295
15.12	Bluetooth.....	296
15.13	System.....	297
15.14	Sleep Timeout.....	300
15.15	NFC	301
15.16	MSR	302
15.17	ICCR(IC CARD READER)	304
15.18	Key Management	305
15.19	Multilanguage	306
16.	APPENDIX G – 2D SPECIAL BARCODES (KDC500C)	307
16.1	Set Symbologies	307
16.2	Barcode Options.....	307
16.3	Delete Last Scanned Barcode	307
16.4	Scan Options.....	308
16.5	Scan Timeout	309
16.6	Minimum Barcode Length.....	310
16.7	ScanIfConnect	313
16.8	Data Process - Wedge/Store, Enter Key & Extend Key.....	314
16.9	Data Process - Data Edit	315
16.10	Data Process – Data Format.....	316

16.11	Data Process - Termination Character & Duplicate Check	317
16.12	Bluetooth.....	318
16.13	System.....	319
16.14	Sleep Timeout.....	322
16.15	NFC	323
16.16	MSR	324
16.17	ICCR(IC CARD READER)	326
16.18	Key Management	327
16.19	Multilanguage	328
17.	APPENDIX G – MULTIPLE SPECIAL BARCODES	329
17.1	KDC20/100/250/270L/270D/350L/410/411/415/470L/470D/500L.....	329
17.2	KDC30/270C/300/350C/420/421/425/450/470C/ 500C	329
18.	APPENDIX H – POWER MANAGEMENT	331
18.1	1D – KDC270L/270D/470L/470D	331
18.2	2D – KDC30OP/KDC270C/470C	332
19.	APPENDIX I – KDC470 SPECIFIC FEATURES.....	334
19.1	Connection method with a PC	334
19.2	Smart device charging method.....	334
19.3	Configuring SCAN buttons	335
	1D – KDC470L/D	335
	2D – KDC470C	335

List of Figures

Figure 1 - How to turn on the power in KDC20/30/270/350/400/470/500	32
Figure 2 - Selecting a Bluetooth device type from the KDC menu	34
Figure 3 - Selecting Pairing mode in KDC	35
Figure 4 - Pairing mode button	36
Figure 5 - Pairing menu shortcut button in KDC500.....	36
Figure 6 - Finding Bluetooth MAC Address	38
Figure 7 - Connecting KDC with a smart phone by scanning Bluetooth MAC Address Barcode	39
Figure 8 - Location of KDC Menu and use of buttons (KDC100/200/250/270/300)	44
Figure 9 - Location and use of buttons on a keypad (KDC350)	45
Figure 10 - Location and use of buttons on a keypad (KDC500)	45
Figure 11 - KDC Display	46
Figure 12 - Scanning barcodes using KTSync	46
Figure 13 - Location for reading NFC Tag.....	48
Figure 14 - Delete Function in KDC20/30	71
Figure 15 - Replacing a Battery	100
Figure 16 - KTSync® Synchronizer Initial Screen	109
Figure 17 - File Menu.....	110
Figure 18 – Setting Menu	110
Figure 19 - Application Menu	111
Figure 20 - About Menu	111
Figure 21 - COM Port Selection for KDC	112
Figure 22 - Bluetooth Device Registry.....	113
Figure 23 – Configuration.....	114
Figure 24 - KTSync Synchronization Settings	115

Figure 25 - Barcode & KDC Settings, Symbologies, Data Editing and Scan Options.....	119
Figure 26 - KTSync® Confirmation Settings.....	121
Figure 27 - KDC Menu in KTSync	122
Figure 28 - Mobile pKTSync	123
Figure 29 - Android aKTSync.....	125
Figure 30 - iPad/iPhone/iPod touch KTSync	128
Figure 31 - Blackberry bKTSync	131
Figure 32 - Application Menu	137
Figure 33 - Application Warning Window.....	137
Figure 34 - Application Generation Menu.....	138
Figure 35 - Data Filter Settings.....	139
Figure 36 - Master/Slave Application Settings.....	142
Figure 37 - Master/Slave Application Flow Chart.....	143
Figure 38 - Pick/BIN Application Menu	144
Figure 39 - Pick/BIN Application Flow Chart.....	145
Figure 40 - DB Lookup Application Menu	147
Figure 41 – Inventory Application	148

List of Tables

Table 1 - Features of KDC	20
Table 2 - Number of hours required to fully charge a KDC Battery	44
Table 3 - KDC Menu	70
Table 4 - KDC30/270C/300/350C/420/450/470C/500C Minimum Barcode Length	73
Table 5 - Explanation of LEDs.....	93
Table 6 - Troubleshooting Techniques.....	150
Table 7 - Symbologies Supported by KDC	153
Table 8 - Add-on for EAN-13 Symbology	154
Table 9 - Add-on for EAN-8 Symbology.....	155
Table 10 - Symbology Conversion	156
Table 11 - Verification of Optional "Check Digit"	157
Table 12 - Transmission of "Check Digit"	158
Table 13 - Resolution of Inconsistencies	159
Table 14 – Symbologies supported by KDC30/300/350C/420/425/500C	162
Table 15 – Symbologies supported by KDC	162
Table 16 – Symbologies supported by KDC.....	162

COPYRIGHT, LICENSE, and WARNING PAGE

Copyright® 2002-2017 by KOAMTAC, Inc. All rights reserved.

No part of this publication may be reproduced or used in any form, or by any electrical or mechanical means, without permission in writing from KOAMTAC, Inc. The material in this manual is subject to change without notice. KOAMTAC reserves the right to make changes to any product to improve reliability, function, or design. KOAMTAC does not assume any product liability arising out of, or in connection with, the application or use of any product, circuit, or application described herein. Follow all warnings and instructions marked on manual and units. Use only the power source specified in this manual or marked on the units.

KDC® is a registered trademark and property of KOAMTAC, Inc.

KoamTac® is a registered trademark and property of KOAMTAC, Inc.

KTSync® is a registered trademark and property of KOAMTAC, Inc.

KoamTacON® is a registered trademark and property of KOAMTAC, Inc.

SmartSled® is a registered trademark and property of KOAMTAC, Inc.

ezTCP® is a registered trademark and property of KOAMTAC, Inc.

ezVSP® is a registered trademark and property of KOAMTAC, Inc.

TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS UNIT TO ANY TYPE OF MOISTURE. DO NOT LOOK DIRECTLY INTO LASER OR POINT THE LASER INTO ANOTHER PERSON'S EYES. EXPOSURE TO THE BEAM MAY CAUSE EYE DAMAGE.

CAUTION:

Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

Patents:

Certain KDC Products may be covered by the following issued US patents numbers 7769917, 7954710, 8126399, 8295368, 8346979, 8347366, 8371506, 8483614, 8832323, 9411366; Korea patents numbers 101383407, 101354252; UK patents numbers GB2492615, GB2514746.

Regulatory Compliance

US



FCC ID: VH9KDC20, VH9KDC30, VH9KDC100, VH9KDC200, VH9KDC250, VH9KDC270,
VH9KDC300, VH9KDC350, VH9KDC400, VH9KDC450, VH9KDC470, VH9KDC500A

This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and may radiate radio frequency energy. It may cause harmful interference to radio communications if not installed and used in accordance with the instructions. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which may be determined by turning the equipment off and on, the user is encouraged to try to correct the interference with one or more of the following measures:

1. Reorient / Relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a different circuit than the receiver.
4. Consult with the dealer or an experienced radio/TV technician for help.

WARNING:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Europe
 2200 0983

Certificate No.: EMC15688-07-01

Products intended for sale within the European Union are marked with a CE Mark which indicates compliance to applicable Directives and European Normes (EN), as follows. Amendments to these Directives or ENs are included: Normes (EN), as follows.

Applicable Directives:

- Radio and Telecommunications Terminal Equipment Directive 1999/5/EC

Scope of Opinion (Essential Requirements)	Applied Specifications/Standards	TCF Identification	Results
Article 3.1(a) – Health	EN 62311:2008	Statement	Complies
Article 3.1(a) - Safety	EN 60950-1:2006+A11:2009	ESTCS1101-002	Complies
Article 3.1(b) – EMC	EN 55022:2006+A1:2007 EN 55024:1998+A1:2001+A2:2003 ETSI EN 301 489-1 V1.8.1 (2008-04) ETSI EN 301 489-17 V2.1.1 (2009-05)	ESTCE0712-007(1)	Complies
Article 3.2 – Radio Spectrum Use	ETSI EN 300 328:V1.7.1 (2006-10)	ESTR0801-018(1)	Complies

Japan



R

003WWA080049, 003WWA090274, 208-120048, 208WW110041,
208-130029, 208-140011, 208-140049

Article 2-1-19, 2.4GHz Wide Band low power data communication system

Japan



2014026493, 2014027753

Korea



MSIP-CMM-A13-KDC20, MSIP-CMM-A13-KDC30, AI3-KDC100, AI3-KDC200,
MSIP-CMM-A13-KDC250, MSIP-CMM-A13-KDC270, MSIP-CMM-A13-KDC300, MSIP-CMM-A13-KDC350,
MSIP-CMM-A13-KDC400, MSIP-CMM-A13-KDC450, MSIP-CMM-A13-KDC470, MSIP-CMM-A13-KDC500A

Laser Compliance

KDC20/100/200/250/270L/350L/410/411/415/470L



Complies with US 21 CFR 1040.10 and 1040.11 except for deviations pursuant to laser notice no. 50, dated June 24, 2007 and IEC 60825-1 (Ed. 2.0)
Complies with IEC60825-1:1993 + A1:1997 + A2:2001

Battery Warning

- This device contains a rechargeable NiMH. Never throw the battery into a fire, as that could cause the battery to explode.
- Never short-circuit the battery by bringing the terminals in contact with another metal object. This could cause personal injury, a fire, and/or damage to the battery.
- Never dispose of used batteries with other ordinary solid wastes. Batteries contain toxic substances.
- Dispose of used batteries in accordance with the prevailing community regulations that apply to the disposal of batteries. Cover the metal terminals with insulating tape (this is to prevent accidental short-circuiting).
- Never expose the battery to any liquid.
- Always keep the battery out of reach of infants or small children.
- Never shock the battery by dropping it or throwing it.
- Dispose of a spent or damaged battery promptly.

WARNING: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE.
DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

Product Disposal

This device should not be placed in municipal waste. Please check local regulations for disposal of electronic products.

Bluetooth®

Core Specification: 2.1+EDR

Apple®

Made for iPhone, Made for iPod, Made for iPad

Samsung®

Compatible with Galaxy and Gear Series

Warranty Policy

KOAMTAC ONE YEAR LIMITED WARRANTY

KOAMTAC products are warranted to be free from defects in materials or workmanship for one (1) year from the date of purchase from an authorized dealer of KOAMTAC products. Within this period, we will, at our sole discretion, repair or replace any components that fail in normal use. Such repairs or replacement will be made at no charge to you for parts and/or labor, provided that you shall be responsible for any transportation charges. Replacement products may be new or refurbished at our discretion.

This warranty does not apply to: (i) cosmetic damage, such as scratches, nicks, stains and dents; (ii) consumable parts, such as batteries, unless product damage has occurred due to a defect in materials or workmanship; (iii) damage caused by accident, abuse, misuse, water (in excess of specifications), flood, fire, or other acts of nature or external causes; (iv) damage caused by service performed by anyone who is not an authorized service provider of KOAMTAC; or (v) damage to a product that has been modified or altered without the prior written permission of KOAMTAC.

Repairs have a ninety (90) day warranty. If the unit sent in is still under its original warranty, then the new warranty will be the longer of ninety (90) days or the balance of the original one year warranty.

THE WARRANTIES AND REMEDIES CONTAINED HEREIN ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ANY LIABILITY ARISING UNDER ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, STATUTORY OR OTHERWISE. Subject to applicable law, in no event shall our liability exceed the purchase price of the Hardware.

RETURN

For warranty returns, you must pack your KOAMTAC product in its original packaging and include all accessories and documentation. We reserve the right to charge for any damage to the KOAMTAC product, and missing part fees may apply.

Please contact Customer Service prior to returning any product to receive a return authorization form and RMA number. You will be responsible for, and pre-pay, all return shipping charges and shall assume all risk of loss or damage to product while in transit to us. We recommend that you use a traceable method of shipping for your protection. We will pay for shipping to return any product to you.

Email us at rma@koamtac.com to obtain an RMA number. Once you have obtained the RMA number, please send us your purchased KOAMTAC product with the RMA number clearly marked on the outside of the package and on the shipping slip if you choose to use traceable carriers such as UPS or FEDEX. Shipping fees for returns are your responsibility. Return shipping instructions and return address will be included in your RMA document provided by KOAMTAC.

1. Introduction

Congratulations on purchasing a revolutionary KOAMTAC KDC.

KOAMTAC's KDC works with a wide variety of portable applications. Use it independently or as a PC, PDA, or smartphone/tablet accessory.

FEATURES	KDC20	KDC30	KDC100	KDC200	KDC250	KDC270	KDC300	KDC350	KDC400	KDC450	KDC470	KDC500
USB CONNECTIONS	1	1	2	1	1	1	1	1	2	2	1	1
RECHARGEABLE BATTERY	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
SCAN ENGINE	Laser/ CCD	Imager	Laser	Laser	Laser	Laser/ CCD/ Imager	Imager	Laser/ CCD/ Imager	Laser/ Imager	Imager	Laser/ CCD/ Imager	CCD/ Imager
AUTOMATIC DATA UPLOAD	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
MAXIMUM STORED BARCODE (EAN13)	7,680	7,680	409,600	409,600	409,600	409,600	409,600	409,600	4,096	409,600	409,600	153,600
KTSync® SOFTWARE	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
SDK	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
SUPPORTS WINDOWS XP, 7, 8 & 10	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
ANDROID, BLACKBERRY, IOS, WINDOWS PHONE 8.1 & 10	YES	YES	NO	YES	YES	YES	YES	YES	YES	YES	YES	YES
BLUETOOTH	YES	YES	NO	YES	YES	YES	YES	YES	YES	YES	YES	YES
GPS (OPTIONAL)	NO	NO	NO	NO	YES	NO	NO	YES	NO	NO	NO	NO
NFC (OPTIONAL)	NO	NO	NO	NO	NO	NO	NO	YES	YES	NO	NO	YES
HF (OPTIONAL)	NO	NO	NO	NO	NO	NO	NO	NO	NO	YES	YES	NO
UHF (OPTIONAL)	NO	NO	NO	NO	NO	NO	NO	NO	NO	YES	YES	NO
MSR (OPTIONAL)	NO	NO	NO	NO	NO	NO	NO	NO	YES	NO	NO	YES
IC CARD (OPTIONAL)	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	YES
USB DISK	NO	NO	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO
USB HID	YES	YES	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO
WIFI (OPTIONAL)	NO	NO	NO	NO	NO	NO	NO	YES	NO	NO	NO	NO

Table 1 - Features of KDC

1.1 KDC Package Contents

The standard KDC package contains:

1. One KDC
2. USB Cable
 - KDC20/30 (N/A)
 - KDC100/200/250/300/350 (8pin Ultra-mini USB Cable)
 - KDC270/400/450/470/500 (5pin Micro USB Cable)
3. One Lanyard (KDC20/30/100/200/250/270/300/350) or One Hand Strap (KDC400/450/470/500)
4. (Optional) One KDC Protective Rubber Boot (KDC100/200/250/300/350).

The following KDC accessories are available to purchase at store.koamtac.com or by contacting a local reseller.

- Protective Rubber Boots for KDC20/30/270/350
- SmartSled® cases for KDC400/450/470/500
- Charging Cradles for KDC20/30/100/200/250/270/300/350/411/421/430/450/470/500
- Finger Trigger Gloves for KDC200/250/270/300/350
- Finger Trigger Glove Adaptor for KDC200/250/270/300
- ezCharging Adaptor for KDC350
- Hardpack Battery Charging Adaptor for KDC350/470/500
- KDC500 SmartSled® Adaptor
- KDC Batteries

Note

Depending on the distributor, package contents may vary.



KDC20/30
Package Contents



KDC100/200/250/300
Package Contents



KDC270/KDC350
Package Contents



KDC400/450/470
Package Contents




KDC500
Package Contents

1.2 KDC Characteristics

Before using the KDC, the user should become familiar with its physical characteristics. Refer to Figure 2, 3, 4, and 5 below. These figures indicate the placement of the SCAN, UP, DOWN and DELETE buttons, OLED display, LED, and ports on the KDC.

Although KDC models consist of similar buttons and LEDs, each model has different characteristics for its own purpose of use. The KDC20/30/100 includes a swing-out USB connector and the KDC350/500 has a keypad.


KDC20/30 Barcode Reader and Data Collector

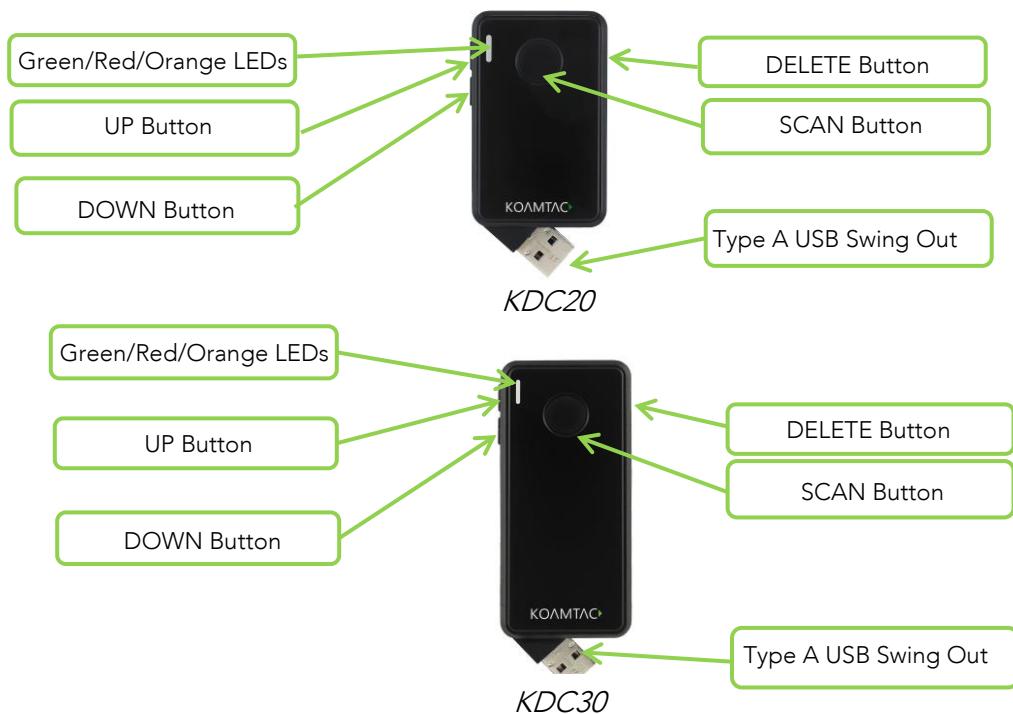

KDC100 Barcode Reader and Data Collector




KDC200/250/270/300/350 Barcode Reader and Data Collector

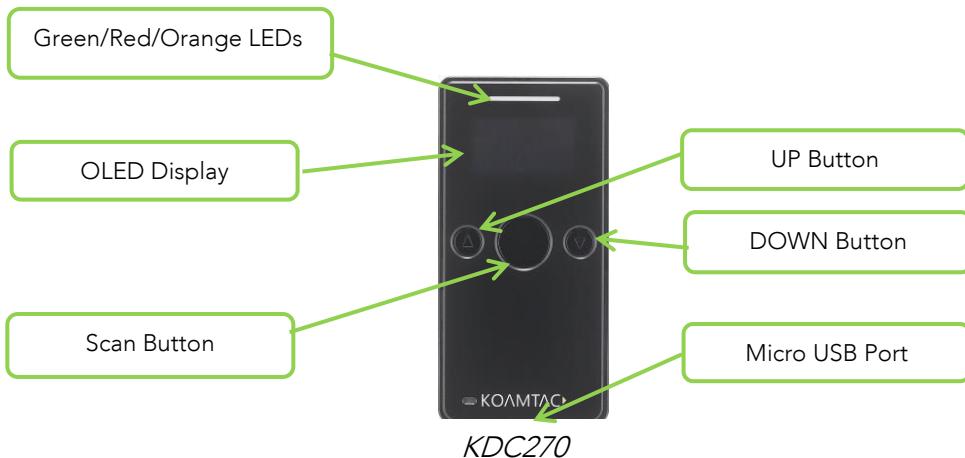



KDC400/450/470 Barcode Reader and Data Collector



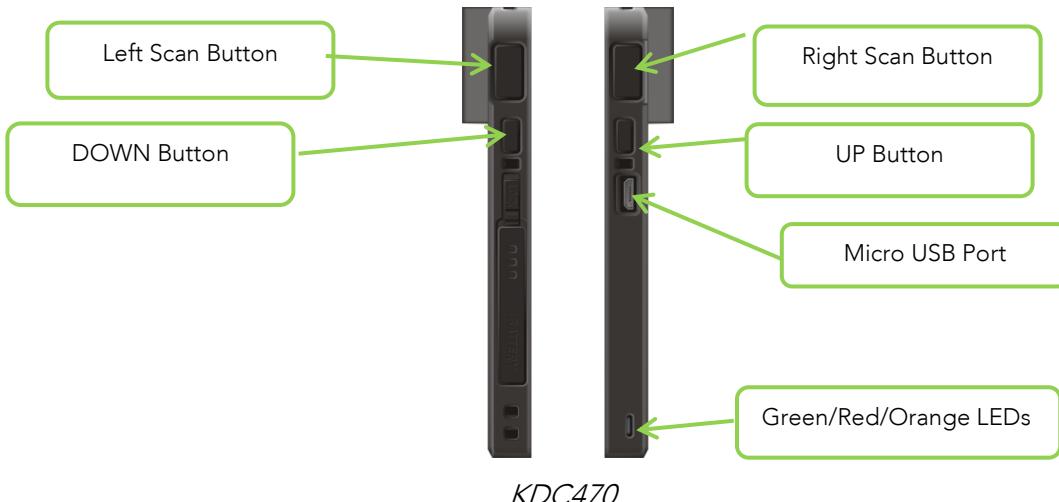

KDC470

KDC500 Mobile POS



1.3 Keypad Functionality for KDC350

Menu	Enables the user to enter or exit the KDC Menu. While in menu mode, press once to exit.
Shift	Enables the user to change character input mode from capital letters to small letters, and vice versa.
Mode	Enables the user to switch between ABC and number input mode.
 (UP button)	While in the KDC menu, press this button to go up on the selection bar. While on the main screen, press this button and the KDC will try to connect to a BT host device.
 (DOWN button)	While in the KDC menu, press this button to go down on the selection bar. While on the main screen, press this button to toggle the iOS soft keyboard (if the KDC is connected in HID-iOS mode).
 (Number button)	Input numbers or characters
 # (Enter button)	Press to finish data input (if "Enter Key" option is disabled). Press to finish data input and move cursor to next line (if "Enter Key" option is enabled).
 * (Delete button)	Press to delete the last character or number input
	Press both Scan button and Down button for more than 5 seconds at the same time to turn KDC350 power on and off.

Fn
(Function button)

This button may be used in conjunction with a number key to control the KDC settings shown below.



FN + 1	Keypad light On/Off
FN + 2	GPS Power On/Off (KDC350G series only)
FN + 3	NFC Power On/Off (KDC350N series only)
FN + 4	Enter Bluetooth Pairing Mode
FN + 5	Bluetooth Power On/Off
FN + 6	Change Bluetooth profile
FN + 0	Factory Default

1.4 Keypad Functionality for KDC500

 (Menu/Down button)	While in the KDC500 menu, press this button to scroll down the selection bar. While on the main screen, press this button for 5 seconds then the KDC500 will enter the KDC500 menu mode.
 (FN/Up button)	While in the KDC500 menu, press this button to scroll up the selection bar. While on the main screen, press this button for 5 seconds then the KDC500 will enter the KDC500 BT Service menu.
 (Number button)	Input numbers or characters
 (Enter button)	Press to finish data input.
 (Delete button)	Press to delete the last character or number input.
 (Cancel button)	Press to cancel data input.

1.5 Input data by using a keypad (KDC350)

- When the KDC350 shows a blank main screen, you may start pressing numbers or characters of the barcode data that needs to be input.
- See an example below: How to save the barcode data "123Koamtac".

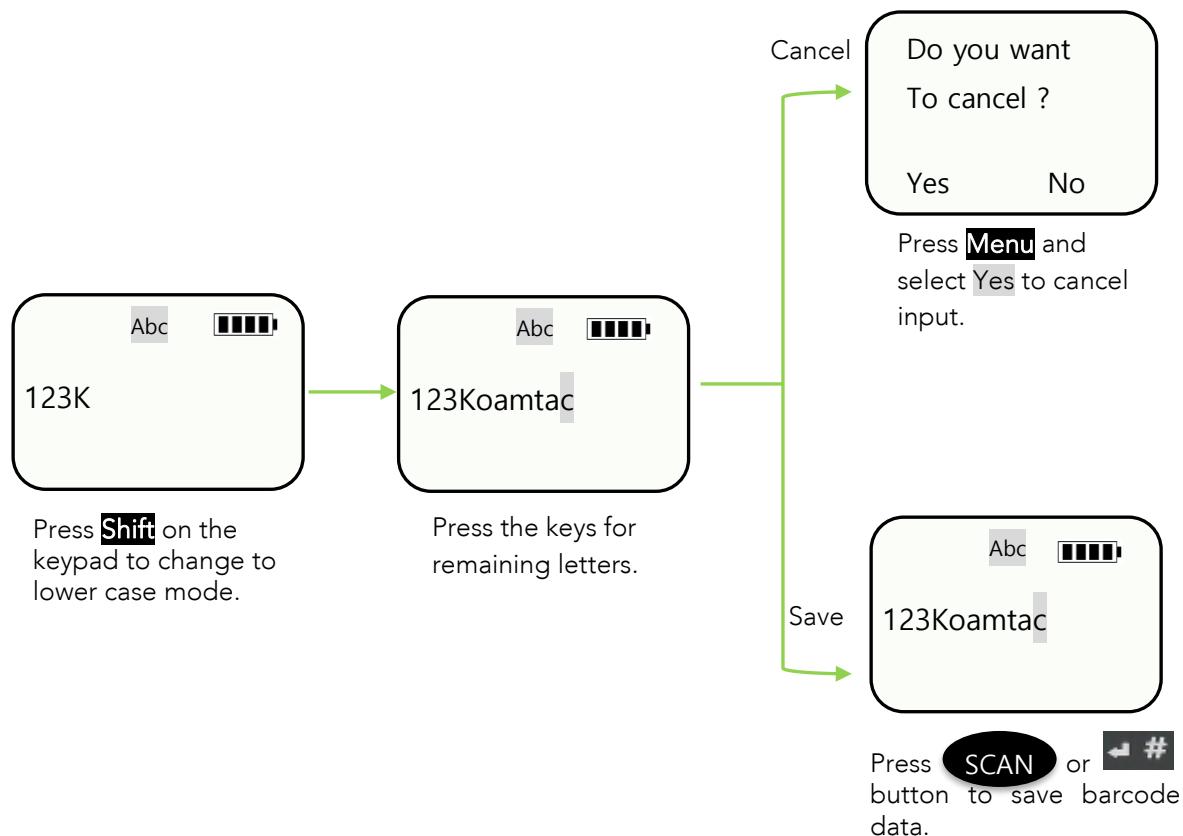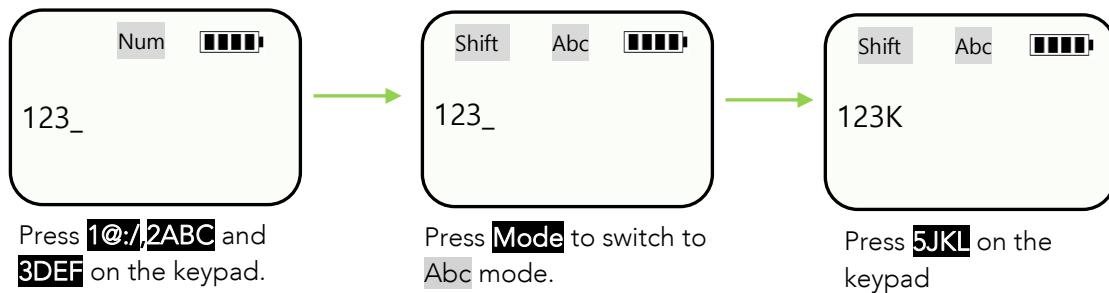

1.6 Turn on the power of KDC20/30/270/350/400/470/500

KDC20/30/270/350/400/470/500 have power on/off switch. Please turn on the power first before using the device.

KDC20/30

Press SCAN and DOWN buttons simultaneously for 5 seconds. The user will hear a beep sound when it is turned on.



KDC270

Press SCAN and DOWN buttons simultaneously for 5 seconds. The user will hear a beep sound when it is turned on.



KDC470

Press SCAN and DOWN buttons simultaneously for 5 seconds. The user will hear a beep sound when it is turned on.



KDC400



Slide POWER button to the right.

KDC500

Press Left and Right SCAN buttons simultaneously for 5 seconds. The user will see a KOAMTAC logo in the display and hear a beep sound when it is turned on.



Figure 1 - How to turn on the power in KDC20/30/270/350/400/470/500

2. Installation

2.1 Bluetooth Pairing

The KDC may read and store barcode data independently, but it may also be used in conjunction with a PC, PDA, or smart device.

In order to read barcode data with your KDC wirelessly, the user must first pair the KDC and smart device via Bluetooth. If previously paired and no changes have been made in the smart device's Bluetooth settings, the smart device will always recognize the KDC that has previously been paired. However, if changes have been made, the user may need to go through the pairing process again. The user may also refer to [Chapter 4. Bluetooth](#) for more information about Bluetooth pairing.

Preparing for Pairing

Select a Bluetooth profile. There are two ways to set up a Bluetooth profile. The user may establish a Bluetooth profile manually (on the scanner) or by scanning a programming barcode as shown below.

KDC 20/100/200/250/270L/270D/350L/410/411/415/470L/470D/500L (1D)

Bluetooth Profile SPP



6A000

Bluetooth Profile HID iOS



6A001

Bluetooth Profile MFi



6A002

Bluetooth Profile SPP2.0



6A003

Bluetooth Profile HID normal



6A004

Note

For PCI PTS compliance, KDC500L supports only Bluetooth Profile SPP and MFi.

KDC30/300/270C/350C/420/421/425/450/470C/500C (2D)

Bluetooth Profile SPP



_T MKDC6A000.

Bluetooth Profile HID iOS



_T MKDC6A001.

Bluetooth Profile MFi



_T MKDC6A002.

Bluetooth Profile SPP2.0



_T MKDC6A003.

Bluetooth Profile HID normal



_T MKDC6A004.

Note

For PCI PTS compliance, KDC500C supports only Bluetooth Profile SPP and MFi.

Some KDCs are equipped with an LCD screen (KDC100/200/250/270/300/350/500), the user may select a Bluetooth profile from the **ConnectDevice** menu as shown below.

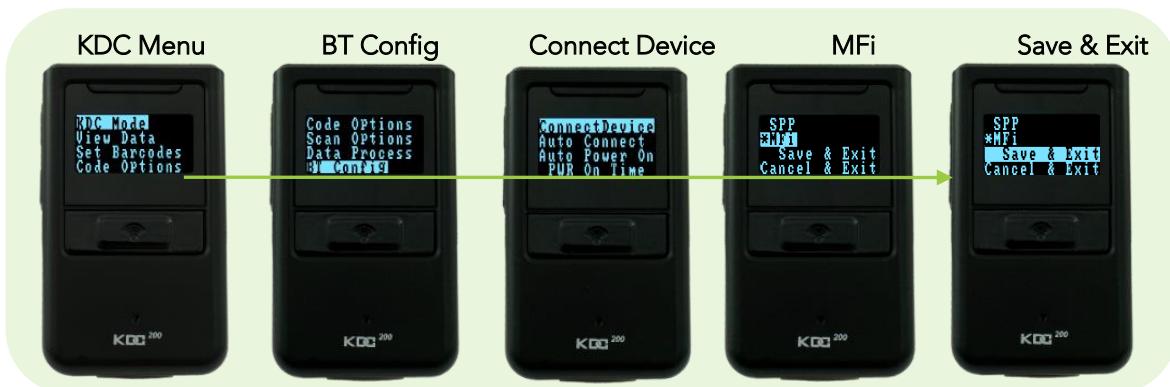


Figure 2 - Selecting a Bluetooth device type from the KDC menu

Pairing

First Option: Connect the KDC from a host (PC or Smart Device)

This method is recommended for first-time users or when the user is only connecting a few KDCs.


1. Put the KDC into **Pairing** mode

- Select the correct pairing barcode and scan below for your KDC model, or

KDC 20/100/200/250/270L/270D/350L/410/411/415/470L/470D/500L (1D)



KDC30/300/270C/350C/420/421/425/470C/500C (2D)

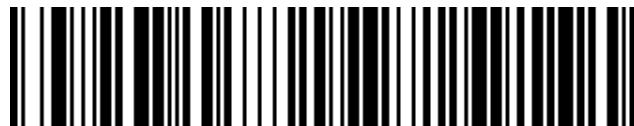

Pairing Special Barcode

- Select **Pairing** from the KDC menu.



Figure 3 - Selecting Pairing mode in KDC

- Press the Scan button for three seconds in order to enter into Pairing mode.

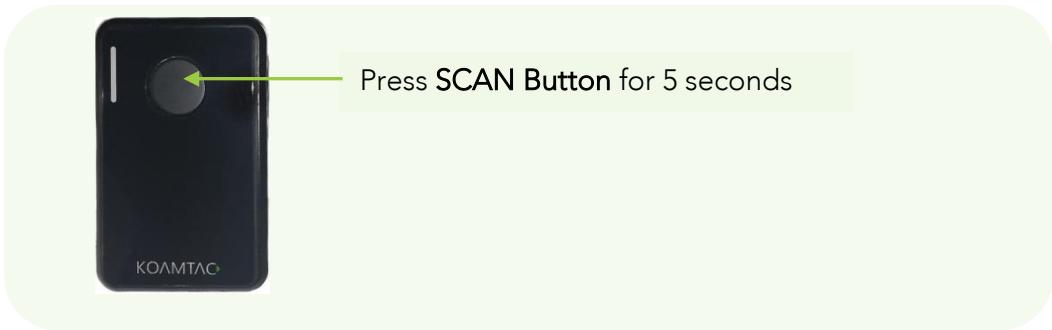


Figure 4 - Pairing mode button

- For the KDC500, press the FN button for five seconds in order to directly enter the BT Service menu while it is not in the sleep mode.

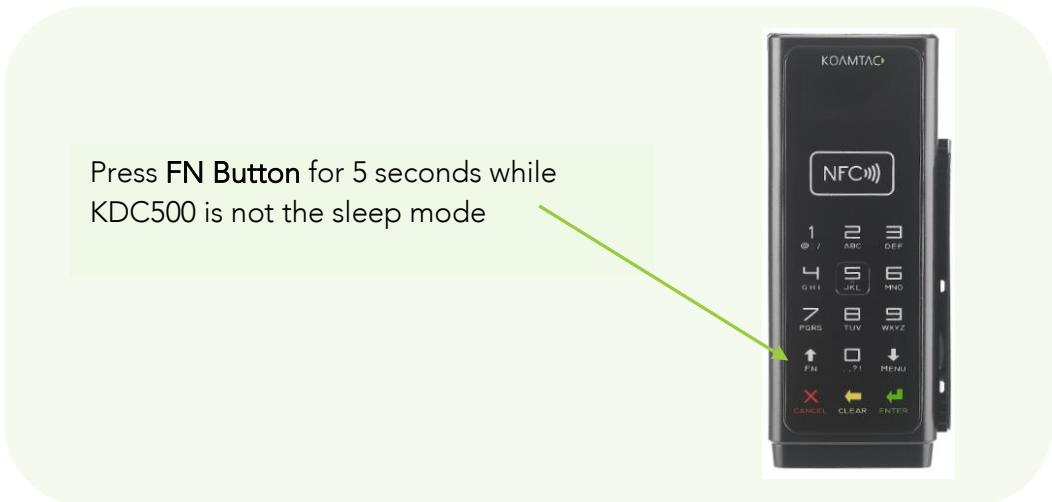


Figure 5 - Pairing menu shortcut button in KDC500

2. On the host device, go to **Settings -> Bluetooth**, and select the KDC that needs to be paired. The KDC and host device will now communicate with each other.



Note

For PCI PTS compliance, KDC500 requires Numeric Comparison method.



3. After it has been installed, open KTSync and it will automatically find and connect to the KDC. (Refer to **2.2 KOAMTAC Installation Wizard** for more information about installing KTSync).

Second Option: Connect the host device from the KDC by scanning a Special Bluetooth MAC Address barcode

This method is recommended for advanced users or when the application or process requires the pairing of multiple KDCs to multiple host devices on a regular basis.

1. Find the Bluetooth MAC Address of the host device.



Figure 6 - Finding Bluetooth MAC Address

2. Create the Bluetooth MAC Address Barcode according to the format below as an example based on "<http://www.terryburton.co.uk/barcodewriter/generator/>".

For 1D scanners like KDC20/200/250/270L/270D/350L/410/411/415/470L/470D/500L,
Bluetooth MAC Address: **1234567890AB**
Barcode Type (Symbology): **Code 128**
Contents: **^FNC3651234567890AB**
Options: **parsefnc**

For 2D scanners like KDC30/300/270C/350C/420/421/425/450/470C/500C,
Bluetooth MAC Address: **1234567890AB**
Barcode Type (Symbology): **QR Code**
Contents: **^022M^013KDC651234567890AB.**
Options: **elevel=M parse**

3. Print the Bluetooth MAC Address

Note:

2D barcode scanners such as the KDC30/270C/300/350C/420/421/425/450/470C/500C models may read barcodes that have been printed QR barcodes that are on a LCD screen.

1D CCD barcode scanners may read barcodes that have been printed barcodes that are on a LCD screen.

1D laser barcode scanners such as the KDC20/100/200/250/270L/270D/350L/410/411/415/470L/470D/500L models are not designed to read barcodes from a LCD screen and will only read printed barcodes.

4. Connect the KDC to the host device by scanning the Bluetooth MAC Address Barcode.

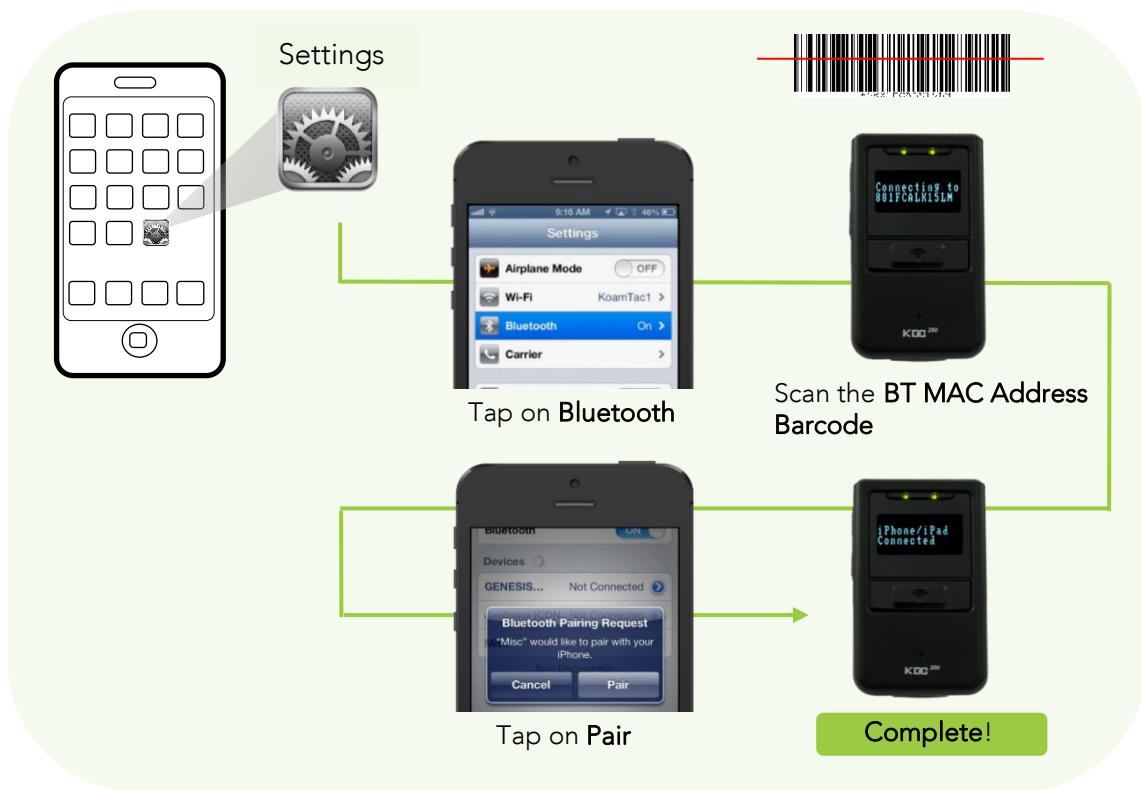


Figure 7 - Connecting KDC with a smart phone by scanning Bluetooth MAC Address Barcode

5. Open KTSync after it has been installed, and it will automatically find the KDC and connect.
(Refer to **2.2 KOAMTAC Installation Wizard** for more information about installing KTSync)

2.2 KOAMTAC Installation Wizard

Windows 7, 8 & 10

WARNING: DO NOT CONNECT KDC TO USB PORT PRIOR TO DRIVER INSTALLATION

1. Insert KOAMTAC Installation CD into the computer's CD drive.
2. Click **Start** icon then **My Computer** icon. A list of devices on the computer will be displayed, including the disk drive containing the KOAMTAC Installation CD.
3. Click on the KOAMTAC Installation CD icon, then the Setup directory. Click on the **PC_Setup.exe** file, which will execute the KTSync Setup Wizard.


Note

If the KTSync Setup Wizard locates an older version of KTSync on the computer, the user will be prompted to remove the older program before installing the new version. Select Remove KTSync then click Finish. When removal is complete, click Close. Go to Step 2 to run KTSync Setup Wizard.


KTSync Setup Wizard

To install KTSync, follow the steps shown in the images below.


1. In the KTSync Setup Wizard window, click **Next**.

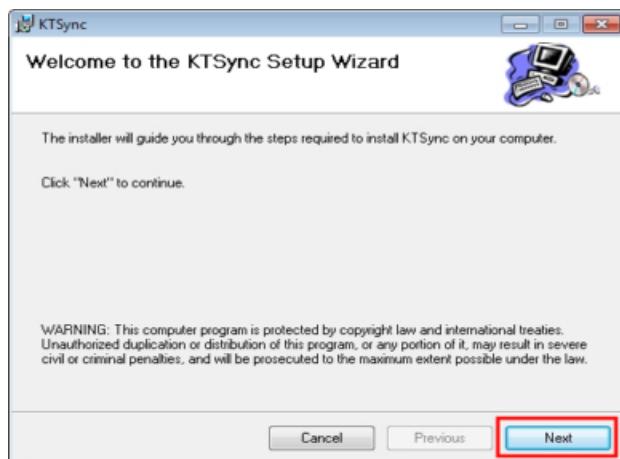

2. In the License Agreement window, select “I Agree” and click **Next**.

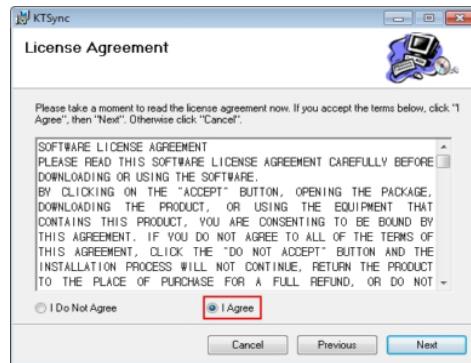

3. In the KTSync Installation Complete window, click **Close** and wait for the Device Driver Installation Wizard.

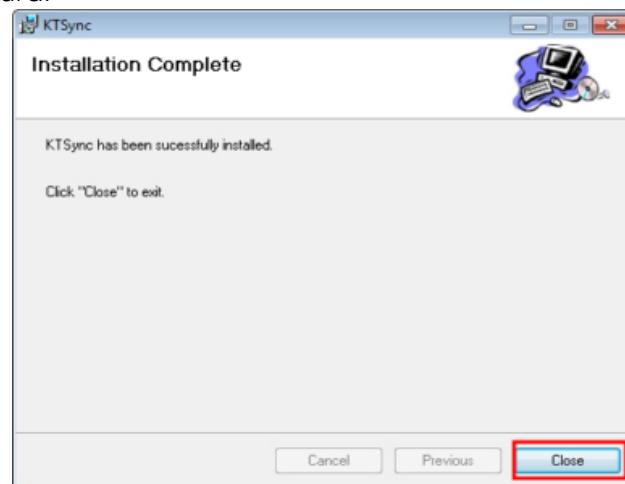

4. In the Windows Security window, click **Install** to complete installation.




Connect KDC to Computer

Using the USB cable included with the KDC or built-in swing out USB connector, follow the directions below.

1. Connect KDC to PC.
2. Wait until the computer beeps and/or displays the message *Found New Hardware*.

Verify COM Port Address

- The installed COM Port may be verified in Device Manager.

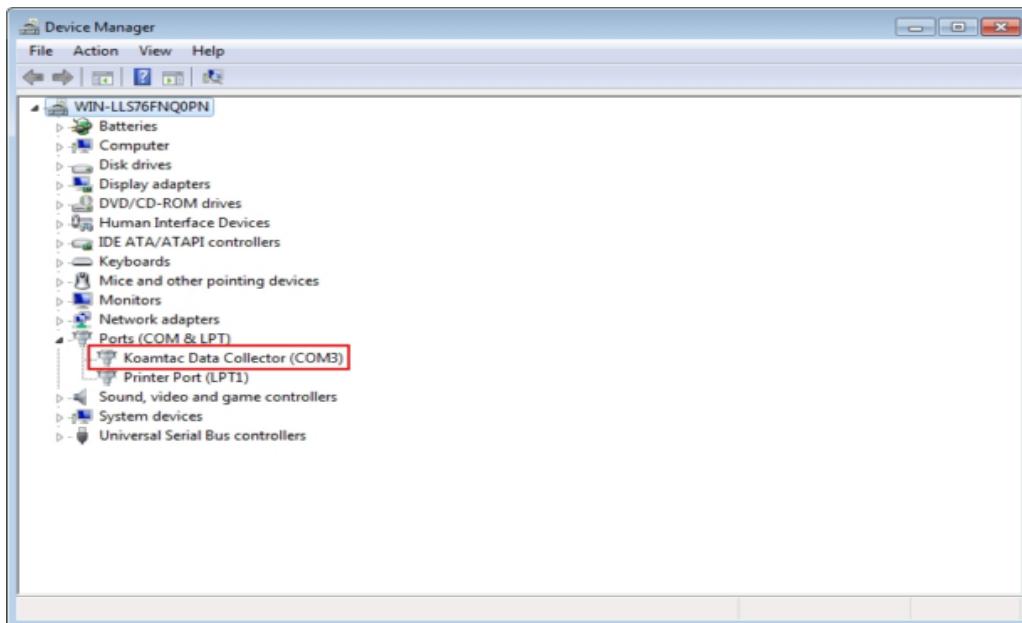

Android

- Download and install KTSync from the Android Play Store.
<https://play.google.com/store/apps/details?id=com.koamtac.ktsync&hl>

iPad/iPhone/iPod Touch

- Download and install KTSync from the Apple App Store.
<http://itunes.apple.com/us/app/ktsync/id372916602?mt=8>

3. Operating your KDC

3.1 Getting Started

Attaching a Lanyard or Hand Strap to a KDC

To prevent possible damage to the KDC, we STRONGLY recommend wearing it around the neck or hand, using the included lanyard or hand strap. In addition, the user should not swing the KDC by its lanyard or hand strap. Impact with another object may cause the KDC to malfunction or damage.

To attach a lanyard/hand strap:

	KDC20/30	KDC100/200/270/300/350/400/470	KDC500	
1	Fit the thin end of the lanyard through the pillar of the KDC.			
2	Guide the thick end of strap through the thin loop.			
3	Pull the strap tight to secure.			

Charge KDC Battery

Prior to using the KDC, the user should charge the battery. Follow the instructions below.

1. Connect the KDC cable to the mini USB connector on the KDC.
2. Connect the KDC cable to the Type A USB connector on the computer.
3. The KDC battery will begin charging. Within a few minutes, the two small LEDs (three LEDs in case of KDC500) on the front panel will illuminate orange. When the battery is fully charged, the LEDs will illuminate green.

KDC100	KDC20/200	KDC30/250/300/270	KDC350	KDC400/470	KDC500
2 Hours	2 Hours	3 Hours	4 Hours	4 Hours	4 Hours

Table 2 - Number of hours required to fully charge a KDC Battery

Configure KDC

The KDC is designed to meet the data collection requirements of many different industries in a variety of dynamic situations. To deliver the best performance in these diverse environments, the KDC is designed to be configured quickly and easily.

However, to perform at its optimum level, the KDC must be configured properly. Until the user is familiar with the KDC configuration settings, it is recommended that the user DOES NOT modify the KDC settings. The KDC may be configured by using three different methods, which are explained in Section [3.3 – KDC Menus](#), [Chapter 5 –Synchronization](#), and [Appendix C/D – Special Barcodes](#).

CONFIGURATION METHODS FOR THE KDC100/200/250/270/300/350/500

- KDC Menu
- KTSync Software
- Special Barcodes



Figure 8 - Location of KDC Menu and use of buttons (KDC100/200/250/270/300)



Press the **Menu** Button to access the KDC menu.
Move the menu bar up and down by pressing the
<^ and **v>** Buttons, and configure the KDC by
pressing the SCAN Button to select a menu.

Figure 9 - Location and use of buttons on a keypad (KDC350)



Press the **MENU** Button for 5 seconds to access the
KDC menu. Move the menu bar up and down by
pressing the **FN** and **MENU** Buttons, and configure
the KDC by pressing the SCAN Button to select a menu.

Figure 10 - Location and use of buttons on a keypad (KDC500)

CONFIGURATION METHODS FOR KDC20/30/400/470

- KTSync Software
- Special Barcodes

3.2 Basics

Reading Barcodes

To read a barcode using the KDC, simply point the KDC at a barcode and press the scan button. Be sure to point the scan engine window at the barcode, not at the user's face, and make sure to position the light beam on the barcode.

If a barcode has been successfully scanned, the user will hear one short beep and the LEDs will illuminate green. The scanned barcode data will be displayed on the KDC screen, along with the scan time and battery level. *Depending on the configuration of the KDC, other information may also be displayed.*

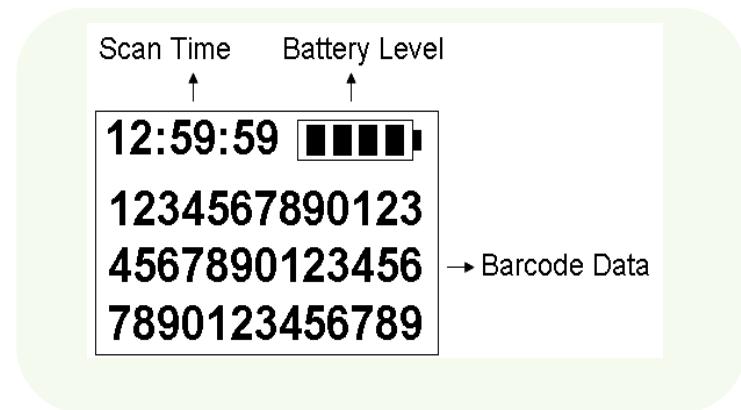


Figure 11 - KDC Display

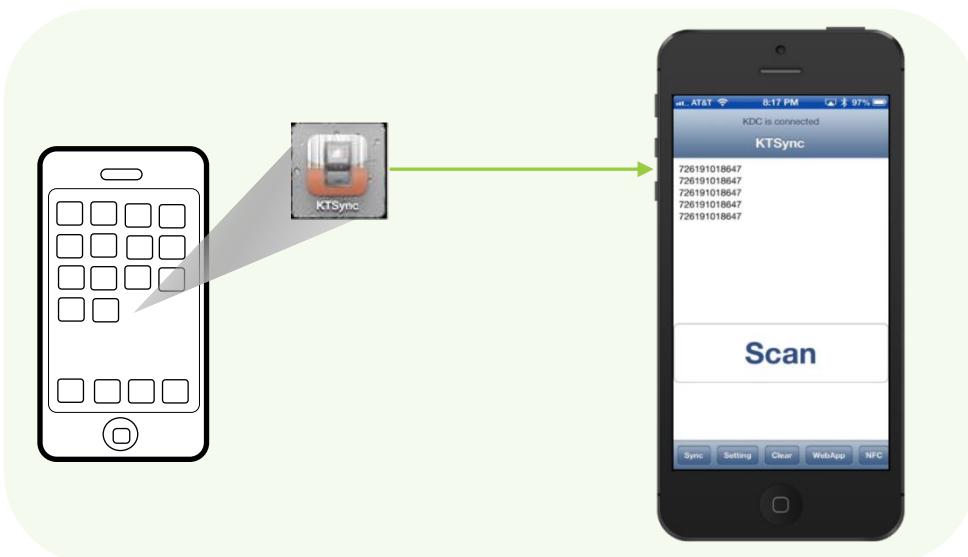


Figure 12 - Scanning barcodes using KTSync

If scanning was unsuccessful, the user will hear two short beeps, the LEDs will illuminate red, and the message ***Failed reading*** will display. If this is the case, the user should point the KDC at the barcode and press the scan button while trying the following suggestions:

- Modify the angle of the KDC in relation to the barcode, making the angle more wide or narrow as needed. (Laser Model)
- Modify the distance between the barcode and the KDC, moving closer or further away as needed.
- Check the option settings defined in the KDC menu section and change options as needed.
- Check to see that the barcode's width does not exceed the light beam's width, and vice versa.

Read Barcodes with GPS Coordinates (KDC250G/350G)

The KDC350G may add GPS coordinates after the barcode data. To do so, the user may follow the below instructions.

Note

Because of the characteristics of GPS, this function is only available when outdoors.

1. Go to **GPS Power** in GPS Menu and select **Enable**.
2. Check to see if the KDC is successfully acquiring GPS data by selecting **Acquire Test** in GPS Menu.
When the user selects the Acquire Test, an '*Acquiring*' message will appear on the screen. If this is the first test, check to make sure the '*Acquired*' message appears within 90 seconds of acquiring GPS signal.
3. Go to **SystemConfig** in the KDC Menu and select **GPS data** in **Display Format**.
4. After finishing the configuration, scan a barcode as explained in **3.2 Reading Barcodes**.
When the user has successfully scanned a barcode, the barcode data and GPS coordinate will appear on the KDC screen.

For more information, refer to **3.3 Menu - GPS Config (KDC250G/350G)**.

Reading NFC Tags (KDC350N/400N/KDC500)

1. Enable the **NFC Power** option in the **NFC Config** menu.
2. Touch the NFC tag to the back of the KDC350N/400N case (or NFC logo on the front of the KDC500 case), and make sure the tag and case are within 5cm of each other.



Figure 13 - Location for reading NFC Tag

3. The KDC will show the NFC tag UID and the user will hear a short beep if it has been read successfully.

Reading HF RFID Tags (KDC450/470)

The KDC450/470 may virtually read any ISO/IEC 14443 A or B compliant smartcards, or ISO/IEC 15693 compliant HF RFID tags.

To read a HF RFID tag, touch the RFID card to the back of the KDC450/470 case, and make sure the tag and case are within 5cm of each other. The user will hear a short beep if it has been read successfully.

Inputting Data by Using a Keypad (KDC350)

The KDC350 Enables users to input barcode data by using its keypad. The user may switch between **Num** mode and **Abc** mode by using the Mode button.

To switch between uppercase and lowercase letters, the user may press the Shift button while in **Abc** mode. To save the data input, press the Enter or SCAN button. For data input, press the Menu button. Refer to [1.5 Input data by using a keypad \(KDC350\)](#) for more detailed information about the process.

Read Magnetic-Stripe (MS) Card(KDC500)

1. The paired host application sends a command to enable the MS Card Reader.
2. Swipe MS Card either top to bottom or bottom to top. Make sure the magnetic stripe of the

card face to the KDC500.

3. The KDC500 will send the MS card data to the paired host application and the user will hear a short beep if it has been read successfully.

Read Integrated Chip (IC) Card(KDC500)

1. The paired host application sends a command to enable the IC Card Reader.
2. Insert IC Card into the IC Card slot located in the left side of KDC500. Make sure the IC of the card face to up.
3. The KDC500 will send the IC card data read to the paired host application.

Synchronizing data to the host device

Use the KTSync program to synchronize barcode data from the KDC to the host device. Please refer to [Chapter 5. Synchronization](#) for details.

3.3 KDC Menu

Top Menu	Sub Menu	Options	KDC20	KDC30	KDC100	KDC200	KDC250	KDC300	KDC350L	KDC350C
KDC Mode	Normal		Default	Default	Default	Default	Default	Default	Default	Default
	Application		N/A	N/A	Custom Application					
View Data	View/Delete		N/A	N/A	View/Delete Data					
Set Barcodes (20/ 100/200/ 250/ 350L)	EAN13	Enabled/ Disabled	Enabled	N/A	Enabled	Enabled	Enabled	N/A	Enabled	N/A
	EAN8	Enabled/ Disabled	Enabled	N/A	Enabled	Enabled	Enabled	N/A	Enabled	N/A
	UPCA	Enabled/ Disabled	Enabled	N/A	Enabled	Enabled	Enabled	N/A	Enabled	N/A
	UPCE	Enabled/ Disabled	Enabled	N/A	Enabled	Enabled	Enabled	N/A	Enabled	N/A
	CODE39	Enabled/ Disabled	Enabled	N/A	Enabled	Enabled	Enabled	N/A	Enabled	N/A
	ITF14	Enabled/ Disabled	Enabled	N/A	Enabled	Enabled	Enabled	N/A	Enabled	N/A
	CODE128	Enabled/ Disabled	Enabled	N/A	Enabled	Enabled	Enabled	N/A	Enabled	N/A
	I2of5	Enabled/ Disabled	Enabled	N/A	Enabled	Enabled	Enabled	N/A	Enabled	N/A
	CODABAR	Enabled/ Disabled	Enabled	N/A	Enabled	Enabled	Enabled	N/A	Enabled	N/A
	GS1-128	Enabled/ Disabled	Enabled	N/A	Enabled	Enabled	Enabled	N/A	Enabled	N/A
	CODE93	Enabled/ Disabled	Enabled	N/A	Enabled	Enabled	Enabled	N/A	Enabled	N/A
	CODE35	Enabled/ Disabled	Enabled	N/A	Enabled	Enabled	Enabled	N/A	Enabled	N/A
	BooklandEAN	Enabled/ Disabled	Disabled	N/A	Disabled	Disabled	Disabled	N/A	Disabled	N/A
	EAN13withAddon	Enabled/ Disabled	Disabled	N/A	Disabled	Disabled	Disabled	N/A	Disabled	N/A
	EAN8withAddon	Enabled/ Disabled	Disabled	N/A	Disabled	Disabled	Disabled	N/A	Disabled	N/A
	UPCAwithAddon	Enabled/ Disabled	Disabled	N/A	Disabled	Disabled	Disabled	N/A	Disabled	N/A
	UPCEwithAddon	Enabled/ Disabled	Disabled	N/A	Disabled	Disabled	Disabled	N/A	Disabled	N/A
Set Barcodes (30/300/ 350C)	GS1 Omni	Enable/ Disable	Disabled	N/A	Disabled	Disabled	Disabled	N/A	Disabled	N/A
	GS1 Limited	Enable/ Disable	Disabled	N/A	Disabled	Disabled	Disabled	N/A	Disabled	N/A
	GS1 Expanded	Enable/ Disable	Disabled	N/A	Disabled	Disabled	Disabled	N/A	Disabled	N/A
	1D Symbology	Codabar	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		Code 11	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		Code 32	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		Code 39	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		Code 93	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		Code 128	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		EAN-8	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		EAN-13	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		GS1 Composit	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		I2of5	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		Matrix 2of5	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		MSI	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		Plessey	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		PosiCode	N/A	Enable	N/A	N/A	N/A	Enabled	N/A	Enabled
		GS1 Omni	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		GS1 Limited	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
		GS1 Expanded	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled
2D Symbology	S2of5 Ind	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	Enabled
	S2of5 IATA	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	Enabled
	TLC39	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	Enabled
	Telepen	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	Enabled
	Trioptic	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	Enabled
	UPCA	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	Enabled
	UPCE0	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	Enabled
	UPCE1	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	Enabled
	AztecCode	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	Enabled
	AztecRunes	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	Enabled

	Codablock F	N/A	Enabled	N/A	N/A	Enabled	N/A	Enabled
	Code16K	N/A	N/A	N/A	N/A	Enabled	N/A	Enabled
	Code49	N/A	N/A	N/A	N/A	Enabled	N/A	Enabled
	DataMatrix	N/A	Enabled	N/A	N/A	Enabled	N/A	Enabled
	MaxiCode	N/A	Enabled	N/A	N/A	Enabled	N/A	Enabled
	MicroPDF	N/A	Enabled	N/A	N/A	Enabled	N/A	Enabled
	PDF417	N/A	Enabled	N/A	N/A	Enabled	N/A	Enabled
	QRCode	N/A	Enabled	N/A	N/A	Enabled	N/A	Enabled
	HanXin Code	N/A	Enabled	N/A	N/A	Enabled	N/A	Enabled
Barcode Options (20/100/200/250/350L)	Postal Codes	Postnet	N/A	Enabled	N/A	N/A	Enabled	N/A
		PlanetCode	N/A	Enabled	N/A	N/A	Enabled	N/A
		UK Post	N/A	Enabled	N/A	N/A	Enabled	N/A
		Mayada Post	N/A	Enabled	N/A	N/A	Enabled	N/A
		Kix Post	N/A	Enabled	N/A	N/A	Enabled	N/A
		Australia Post	N/A	Enabled	N/A	N/A	Enabled	N/A
		Japan Post	N/A	Enabled	N/A	N/A	Enabled	N/A
		China Post	N/A	Enabled	N/A	N/A	Enabled	N/A
		Korea Post	N/A	Enabled	N/A	N/A	Enabled	N/A
Barcode Options (30/300/350C)	OCR	OCR Off	N/A	Enabled	N/A	N/A	Enabled	N/A
		OCR A	N/A	Disabled	N/A	N/A	Disabled	N/A
		OCR B	N/A	Disabled	N/A	N/A	Disabled	N/A
		OCR Passport	N/A	Disabled	N/A	N/A	Disabled	N/A
		OCR MICR	N/A	Disabled	N/A	N/A	Disabled	N/A
		OCR SEMI	N/A	Disabled	N/A	N/A	Disabled	N/A
Barcode Options (20/100/200/250/350L)	CodaBar_NoStartStopChars	Enabled/Disabled	Disabled	N/A	Disabled	Disabled	N/A	Disabled
	UPCE_as_UPCA	Enabled/Disabled	Disabled	N/A	Disabled	Disabled	N/A	Disabled
	EAN8_as_EAN13	Enabled/Disabled	Disabled	N/A	Disabled	Disabled	N/A	Disabled
	UPCE_as_EAN13	Enabled/Disabled	Disabled	N/A	Disabled	Disabled	N/A	Disabled
	ReturnCheckDigit	Enabled/Disabled	Disabled	N/A	Disabled	Disabled	N/A	Disabled
	VerifyCheckDigit	Enabled/Disabled	Disabled	N/A	Disabled	Disabled	N/A	Disabled
	UPCA_as_EAN13	Enabled/Disabled	Disabled	N/A	Disabled	Disabled	N/A	Disabled
	I2of5_VerifyCheckDigit	Enabled/Disabled	Disabled	N/A	Disabled	Disabled	N/A	Disabled
	Code39_VerifyCheckDigit	Enabled/Disabled	Disabled	N/A	Disabled	Disabled	N/A	Disabled
	I2of5_ReturnCheckDigit	Enabled/Disabled	Disabled	N/A	Disabled	Disabled	N/A	Disabled
	Code39_ReturnCheckDigit	Enabled/Disabled	Disabled	N/A	Disabled	Disabled	N/A	Disabled
	UPCE_ReturnCheckDigit	Enabled/Disabled	Enabled	N/A	Enabled	Enabled	N/A	Enabled
	UPCA_ReturnCheckDigit	Enabled/Disabled	Enabled	N/A	Enabled	Enabled	N/A	Enabled
	EAN8_ReturnCheckDigit	Enabled/Disabled	Enabled	N/A	Enabled	Enabled	N/A	Enabled
	EAN13_ReturnCheckDigit	Enabled/Disabled	Enabled	N/A	Enabled	Enabled	N/A	Enabled
Barcode Options (30/300/350C)	Codabar	Tx StartStop (Enabled/Disabled)	N/A	Disabled	N/A	N/A	Disabled	N/A
		Check Digit (DoNotVerify/VerifyDO/NotTX/VerifyyDoTx)	N/A	DoNotVerify	N/A	N/A	DoNotVerify	N/A
		Concatenate(Disabled/Enabled/Required)	N/A	N/A	N/A	N/A	Enabled	N/A
	Code39	Tx StartStop (Enabled/Disabled)	N/A	Disabled	N/A	N/A	Disabled	N/A
		Check Digit(DoNotVerify/VerifyDO/NotTX/VerifyyDoTx)	N/A	DoNotVerify	N/A	N/A	DoNotVerify	N/A
		Append (Enabled/Disabled)	N/A	N/A	N/A	N/A	Disabled	N/A
		Full ASCII(Enabled/Disabled)	N/A	Disabled	N/A	N/A	Disabled	N/A

	I2of5	Check Digit (DoNotVerify/DO NotTx/VerifyDoTx)	N/A	DoNotVerify	N/A	N/A	N/A	DoNotVerify	N/A	DoNotVerify
	Code11	Check Digit (2 digits/1 digit)	N/A	2 digits	N/A	N/A	N/A	2 digits	N/A	2 digits
	Code128	Concatenat e(Disabled/ Enabled)	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled
	Telepen	Output(Ori ginal/AIM)	N/A	Always AIM	N/A	N/A	N/A	AIM	N/A	AIM
UPCA	VerifyChkD gt(Enabled/ Disabled)	N/A	Always Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	
	NumberSys (Enabled/ Disabled)	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	
	2DgtAdden da(Enabled /Disabled)	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	
	5DgtAdden da(Enabled /Disabled)	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	
	Req. Addenda (Enabled/ Disabled)	N/A	N/A	N/A	N/A	N/A	Disabled	N/A	Disabled	
	Sep. Addenda (Enabled/ Disabled)	N/A	N/A	N/A	N/A	N/A	Enabled	N/A	Enabled	
	Coupon Code (Enabled/ Disabled)	N/A	N/A	N/A	N/A	N/A	Enabled	N/A	Enabled	
	Expand (Enabled/ Disabled)	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	
	Req. Addenda (Enabled/ Disabled)	N/A	N/A	N/A	N/A	N/A	Disabled	N/A	Disabled	
	Sep. Addenda (Enabled/ Disabled)	N/A	N/A	N/A	N/A	N/A	Enabled	N/A	Enabled	
UPCE	Check Digit (Enabled/ Disabled)	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	
	NumberSys (Enabled/ Disabled)	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	
	2DgtAdden da(Enabled /Disabled)	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	
	5DgtAdden da(Enabled /Disabled)	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	
	Req. Addenda (Enabled/ Disabled)	N/A	N/A	N/A	N/A	N/A	Disabled	N/A	Disabled	
	Sep. Addenda (Enabled/ Disabled)	N/A	N/A	N/A	N/A	N/A	Enabled	N/A	Enabled	
EAN-13 EAN-8	VerifyChkD gt(Enabled/ Disabled)	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	
	2DgtAdden da(Enabled /Disabled)	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	
	5DgtAdden da(Enabled /Disabled)	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	
	Req. Addenda (Enabled/ Disabled)	N/A	N/A	N/A	N/A	N/A	Disabled	N/A	Disabled	
	Sep. Addenda (Enabled/ Disabled)	N/A	N/A	N/A	N/A	N/A	Enabled	N/A	Enabled	
	ISBN Trans. (Enabled/ Disabled)	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	
	VerifyChkD gt(Enabled/ Disabled)	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	
	2DgtAdden da(Enabled /Disabled)	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	
	5DgtAdden da(Enabled /Disabled)	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	
	Req. Addenda (Enabled/ Disabled)	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	
MSI	Sep. Addenda (Enabled/ Disabled)	N/A	Enabled	N/A	N/A	N/A	Enabled	N/A	Enabled	
	Tx CheckChar (Enabled/ Disabled)	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	
	PosiCode	A and B/A&B Limited/A &B LimitedB	N/A	N/A	N/A	N/A	A&B LimitedB	N/A	A&B LimitedB	

	GS1	UPCEAN Ver.(Enable d/Disabled)	N/A	N/A	N/A	N/A	Disabled	N/A	Disabled
	GS1 Emulation (No Emulate/ GS1 128 Emul/GS1 Emulate)		N/A	N/A	N/A	N/A	No Emulate	N/A	No Emulate
	PostNet	Tx CheckChar(Enabled/Di sabled)	N/A	N/A	N/A	N/A	Disabled	N/A	Disabled
	PlanetCode	Tx CheckChar(Enabled/Di sabled)	N/A	N/A	N/A	N/A	Disabled	N/A	Disabled
Scan Options	Scan Angle	Narrow/ Wide	Wide (Laser only)	N/A	Wide	Wide	N/A	Wide (Opticon Laser only)	N/A
	Filter	Normal/ High	Normal (Laser only)	N/A	Normal	Normal	N/A	Normal (Opticon Laser only)	N/A
	Time Out	.5 seconds to 10 seconds	2 second(s)	2 second(s)	2 second(s)	2 second(s)	2 second(s)	2 second(s)	2 second(s)
	Min. Barcode Length	2 to 36 characters	4 chars	N/A	4 chars	4 chars	N/A	4 chars	N/A
	Min. Barcode Length	2 to 48 characters	N/A	N/A	N/A	N/A	4 chars	N/A	4 chars
	Security Level	1 to 4 level	2 level	N/A	2 level	2 level	N/A	2 level	N/A
	Image Capture	Enabled/ Disabled	N/A	N/A	N/A	N/A	Disabled	N/A	Disabled
	Auto Trigger	Enabled/ Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	Reread Delay	Continuous, Short, Medium, Long, Extra Long	Medium	Medium	Medium	Medium	Medium	Medium	Medium
	Finger Trigger	Enabled/Di sabled	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A
Data Process	Wedge / Store	Start Position	1	1	1	1	1	1	1
		No. of Char(s)	0 chars	0 chars	0 chars	0 chars	0 chars	0 chars	0 chars
		Action	Select	Select	Select	Select	Select	Select	Select
		Save if Not Sent							
		Save if Sent							
	Data Format	Barcode only	Default	Default	Default	Default	Default	Default	Default
		Packet Data							
	Data Editor/ Prefix								
	Data Editor/ Suffix								
	Data Editor/ AIM ID	None/In Prefix/In Suffix	None	None	None	None	None	None	None
BT Config	Connect Device (Non Mfi mode)	Start Position	1	1	1	1	1	1	1
		No. of Char(s)	0 chars	0 chars	0 chars	0 chars	0 chars	0 chars	0 chars
		Action	Select	Select	Select	Select	Select	Select	Select
		Handshake	Enabled/ Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
		Terminator	None, CR, LF, CR+LF, Tab, Right Arrow, Left Arrow, Down Arrow, Up Arrow	CR+LF	CR+LF	CR+LF	CR+LF	CR+LF	CR+LF
	Connect Device (Mfi mode)	Chk Duplicate	Enabled/Di sabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
		Enter Key	Enabled/Di sabled	N/A	N/A	N/A	N/A	Disabled	Disabled
		Extend Key	Enabled/ Disabled	N/A	N/A	N/A	N/A	Disabled	Disabled
		Age Verify	Verification Enabled/ Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled
		Age Default	N/A	21	N/A	N/A	21	N/A	21

		MFN	Default	Default	N/A	Default	Default	Default	Default
	Auto Connect	Enabled/ Disabled	Disabled	Disabled	N/A	Disabled	Disabled	Disabled	Disabled
	Auto Reconnect	Enabled/ Disabled	Disabled	Disabled	N/A	Disabled	Disabled	Disabled	Disabled
	Auto Power On	Enabled/ Disabled	Disabled	Disabled	N/A	Disabled	Disabled	Disabled	Disabled
	Auto Power On/Power On Time	disabled, 1sec to 10seconds(s)	Disabled	Disabled	N/A	Disabled	Disabled	Disabled	Disabled
	Auto Power Off	Enabled/ Disabled	Disabled	Disabled	N/A	Disabled	Disabled	Disabled	Disabled
	Auto Power Off/Beep Warning	Enabled/ Disabled	Disabled	Disabled	N/A	Disabled	Disabled	Disabled	Disabled
	Auto Power Off/Power Off Time	1 to 30 minutes	Disabled	Disabled	N/A	Disabled	Disabled	Disabled	Disabled
	PowerOff Msg	Enabled/Di sabled	Disabled	Disabled	N/A	Disabled	Disabled	Disabled	Disabled
	MAC Address	12 Characters <i>Bluetooth</i> MAC Address			N/A				
	BT FW Version	v1.2.xrt Bluetooth Firmware Version			N/A				
	Wakeup Nulls	Enabled/Di sabled	Disabled	Disabled	N/A	Disabled	Disabled	Disabled	Disabled
	Connect Alert	Enabled/Di sabled	Disabled	Disabled	N/A	Disabled	Disabled	Disabled	Disabled
	BT Toggle	Enabled/Di sabled	Enabled	Enabled	N/A	Enabled	Enabled	Enabled	Enabled
	DisconnectBtn	Enabled/Di sabled	Enabled	Enabled	N/A	Enabled	Enabled	Enabled	Enabled
	HID AutoLock	disabled,1,2 ,3,4,5,10,15 minutes	1 minutes	1 minutes	N/A	1 minutes	1 minutes	1 minutes	1 minutes
	HID Keyboard	US,German, French ,Italian,Spa nish	US	US	N/A	US	US	US	US
	HID Delay/Initial	Disabled, 1,2,3,5,10 secs	Disabled	Disabled	N/A	Disabled	Disabled	Disabled	Disabled
	HID Delay/Inter char	Disabled,10 ,20,30,50, 100msec	Disabled	Disabled	N/A	Disabled	Disabled	Disabled	Disabled
	HID Ctrl Char	Disabled, Alt+Numpa d, ^+Characte r, Replace to	Disabled	Disabled	N/A	Disabled	Disabled	Disabled	Disabled
BT Service	Power	Enabled/ Disabled	Enabled	Enabled	N/A	Enabled	Enabled	Enabled	Enabled
	Pairing	Pairing neighborin g Bluetooth devices			N/A				
	Discovering	Discovering neighborin g Bluetooth devices			N/A				
	Connecting to	View Connect to Bluetooth device			N/A				
	HID Sync				N/A				
	Auto Pairing	Enabled/Di sabled	Enabled	Enabled	N/A	Enabled	Enabled	Enabled	Enabled
USB Config (M model)	USB Mode	Disabled/ USB Disk/ USB HID	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
NFC Config (N model)	NFC Power	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	Enabled	Enabled
	Data Format	Barcode only/Packet Data	N/A	N/A	N/A	N/A	N/A	Packet Data	Packet Data
	UID Only	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	N/A	N/A
GPS Config (G model)	GPS Power	Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	Disabled
	Power Mode	Normal/Po wer Save	N/A	N/A	N/A	Normal	N/A	Normal	Normal
	Bypass Data	Enabled/ Disabled	N/A	N/A	N/A	Disabled	N/A	Disabled	Disabled
	Acquire Test		N/A	N/A	N/A		N/A		
	Reset GPS		N/A	N/A	N/A		N/A		
System Config	Memory Size(3.0+ only)	0.5/6.5, 1/6, 2/5, 3/4, 4/3, 5/2, 6/1, 70	N/A	N/A	0.5M/6.5M	0.5M/6.5M	0.5M/6.5M	0.5M/6.5M	0.5M/6.5M
	Memory Status	No. of Stored Barcodes							
		Free Memory Available							

	Reset Memory	Memory (Empties Data)							
	Application Memory								
	BT Registry (KDC100 Not use)								
	Auto Erase	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	Sleep Timeout	Disabled, 1sec to 10minute(s)	5 second(s)	5 second(s)	5 second(s)	5 second(s)	5 second(s)	5 second(s)	5 second(s)
	Date / Time	YYYY:MM:D D & HH:MM:SS							
	Battery	% of Battery Charge Available							
	Version	Firmware Version & Serial No.							
	Button Lock	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	Beep Alert /Beep Sound	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled
	Beep Alert /Power On Beep	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled
	Beep Alert /Beep On Connect	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled
	Beep Alert /Beep On Scan	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled
	Beep Volume	Low/High	Low	Low	Low	Low	Low	Low	Low
	Mfi (i-chip installed)	Enabled/Disabled	Enabled	Enabled	N/A	Enabled	Enabled	Enabled	Enabled
	Vibrator	Enabled/Disabled/Config	Disabled	Disabled	N/A	N/A	N/A	Disabled	Disabled
	Auto Exit	Enabled/Disabled	N/A	N/A	Enabled	Enabled	Enabled	Enabled	Enabled
	Port Status	Enabled/Disabled	N/A	N/A	Enabled	Enabled	Enabled	Enabled	Enabled
	Display Format	Time & Battery / Type & Battery / Memory Status / GPS Data(KDC250 only)/Barcode Only/ Graphic	N/A	N/A	Time & Battery				
	Menu Barcode	Enabled/Disabled	N/A	Disabled	N/A	N/A	N/A	Disabled	N/A
	Scrolling	Enabled/Disabled	N/A	N/A	Enabled	Enabled	Enabled	Enabled	Enabled
	Brightness	1 to 15 level(8 level)	N/A	N/A	8 level				
	Keypad	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	Enabled	Enabled
	Language (FW Version 3.x only)	None/US(English)/French/Italian/Spanish/Korean/Japanese	N/A	N/A	None	None	None	None	None
	Factory Default	Restores Default Settings							
MSR Config	Data Format	MSR Data Only	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Packet Data		N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Use Track1	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Use Track2	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	UseTrack3	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Beep on error reading	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Encrypt MSR Data	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	AES Key Length	128bit/192bit/256bit	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Card Type	ISO/OOTHER 1/AAMVA	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Track Separator	None/Space/Comma/Semicolon/CR/LF/CR&LF/Tab	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Attach Start/End Sentinel		N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Partial Data Start Position		N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Partial Data Length		N/A	N/A	N/A	N/A	N/A	N/A	N/A

	Partial Data Action	Erase/ Select	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<i>WiFi Config</i>	Power		N/A	N/A	N/A	N/A	N/A	Enable	Enable
	AP	SSID	N/A	N/A	N/A	N/A	N/A	Empty	Empty
		Passcode	N/A	N/A	N/A	N/A	N/A	Empty	Empty
	Server	IP Address	N/A	N/A	N/A	N/A	N/A	0.0.0.0	0.0.0.0
	Server	URL Address	N/A	N/A	N/A	N/A	N/A	Empty	Empty
	Server	Port Number	N/A	N/A	N/A	N/A	N/A	80	80
	Server > Protocol	UDP/TCP/ HTTP GET/ HTTP Post	N/A	N/A	N/A	N/A	N/A	HTTP Post	HTTP Post
	Server > SSL	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	Disabled	Disabled
	Server	Server Page	N/A	N/A	N/A	N/A	N/A	Empty	Empty
	Resp. Timeout	1/2/3/4/5/6/ 7/8/9/10 sec	N/A	N/A	N/A	N/A	N/A	10 sec	10 sec
	Connect	Connecting to AP	N/A	N/A	N/A	N/A	N/A		
	Auto Connect	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	Disabled	Disabled
	Send Stored	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	Enabled	Enabled
	Version	APP MAC	N/A	N/A	N/A	N/A	N/A		

Top Menu	Sub Menu	Options	KDC410/ 411	KDC415	KDC420/ 421	KDC425	KDC430	KDC450	KDC500L	KDC500C
KDC Mode	Normal		Default	Default	Default	Default	Default	Default	N/A	N/A
	Application		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
View Data	View/Delete		N/A	N/A	N/A	N/A	N/A	N/A	View/Delete Data	View/Delete Data
Set Barcodes (410/411/415/5 00L)	EAN13	Enabled/ Disabled	Enabled	Enabled	N/A	N/A	N/A	N/A	Enabled	N/A
	EAN8	Enabled/ Disabled	Enabled	Enabled	N/A	N/A	N/A	N/A	Enabled	N/A
	UPCA	Enabled/ Disabled	Enabled	Enabled	N/A	N/A	N/A	N/A	Enabled	N/A
	UPCE	Enabled/ Disabled	Enabled	Enabled	N/A	N/A	N/A	N/A	Enabled	N/A
	CODE39	Enabled/ Disabled	Enabled	Enabled	N/A	N/A	N/A	N/A	Enabled	N/A
	ITF14	Enabled/ Disabled	Enabled	Enabled	N/A	N/A	N/A	N/A	Enabled	N/A
	CODE128	Enabled/ Disabled	Enabled	Enabled	N/A	N/A	N/A	N/A	Enabled	N/A
	I2of5	Enabled/ Disabled	Enabled	Enabled	N/A	N/A	N/A	N/A	Enabled	N/A
	CODABAR	Enabled/ Disabled	Enabled	Enabled	N/A	N/A	N/A	N/A	Enabled	N/A
	GS1-128	Enabled/ Disabled	Enabled	Enabled	N/A	N/A	N/A	N/A	Enabled	N/A
	CODE93	Enabled/ Disabled	Enabled	Enabled	N/A	N/A	N/A	N/A	Enabled	N/A
	CODE35	Enabled/ Disabled	Enabled	Enabled	N/A	N/A	N/A	N/A	Enabled	N/A
	BooklandEAN	Enabled/ Disabled	Disabled	Disabled	N/A	N/A	N/A	N/A	Disabled	N/A
	EAN13withAddon	Enabled/ Disabled	Disabled	Disabled	N/A	N/A	N/A	N/A	Disabled	N/A
	EAN8withAddon	Enabled/ Disabled	Disabled	Disabled	N/A	N/A	N/A	N/A	Disabled	N/A
	UPCAwithAddon	Enabled/ Disabled	Disabled	Disabled	N/A	N/A	N/A	N/A	Disabled	N/A
	UPCEwithAddon	Enabled/ Disabled	Disabled	Disabled	N/A	N/A	N/A	N/A	Disabled	N/A
Set Barcodes (420/421/425/4 50/500C)	1D Symbology	Codabar	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Code 11	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Code 32	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Code 39	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Code 93	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Code 128	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		EAN-8	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		EAN-13	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		GS1 Composit	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		I2of5	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Matrix 2of5	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		MSI	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Plessey	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		PosiCode	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		GS1 Omni	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		GS1 Limited	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		GS1 Expanded	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		S2of5 Ind	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		S2of5 IATA	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		TLC39	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Telepen	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Trioptic	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		UPCA	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		UPCE0	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		UPCE1	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
	2D Symbology	AztecCode	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		AztecRunes	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Codablock F	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Code16K	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Code49	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		DataMatrix	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Maxicode	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		MicroPDF	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		PDF417	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled

		QRCode	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		HanXin Code	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
Postal Codes	Postnet	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled	
	PlanetCode	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled	
	UK Post	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled	
	Mayada Post	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled	
	Kix Post	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled	
	Australia Post	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled	
	Japan Post	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled	
	China Post	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled	
	Korea Post	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled	
	OCR	OCR Off	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
<i>Barcode Options (410/411/415/500L)</i>	OCR A	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled	
	OCR B	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled	
	OCR USC	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled	
	OCR MICR	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled	
	OCR SEMI	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled	
	CodaBar_NoStartStopChars	Enabled/Disabled	Disabled	Disabled	N/A	N/A	N/A	Disabled	N/A	
	UPCE_as_UPCA	Enabled/Disabled	Disabled	Disabled	N/A	N/A	N/A	Disabled	N/A	
	EAN8_as_EAN13	Enabled/Disabled	Disabled	Disabled	N/A	N/A	N/A	Disabled	N/A	
	UPCE_as_EAN13	Enabled/Disabled	Disabled	Disabled	N/A	N/A	N/A	Disabled	N/A	
	ReturnCheckDigit	Enabled/Disabled	Disabled	Disabled	N/A	N/A	N/A	Disabled	N/A	
<i>Barcode Options (KDC420/425/450/500C)</i>	VerifyCheckDigit	Enabled/Disabled	Disabled	Disabled	N/A	N/A	N/A	Disabled	N/A	
	UPCA_as_EAN13	Enabled/Disabled	Disabled	Disabled	N/A	N/A	N/A	Disabled	N/A	
	I2of5_VerifyCheckDigit	Enabled/Disabled	Disabled	Disabled	N/A	N/A	N/A	Disabled	N/A	
	Code39_VerifyCheckDigit	Enabled/Disabled	Disabled	Disabled	N/A	N/A	N/A	Disabled	N/A	
	I2of5_ReturnCheckDigit	Enabled/Disabled	Disabled	Disabled	N/A	N/A	N/A	Disabled	N/A	
	Code39_ReturnCheckDigit	Enabled/Disabled	Disabled	Disabled	N/A	N/A	N/A	Disabled	N/A	
	UPCE_ReturnCheckDigit	Enabled/Disabled	Enabled	Enabled	N/A	N/A	N/A	Enabled	N/A	
	UPCA_ReturnCheckDigit	Enabled/Disabled	Enabled	Enabled	N/A	N/A	N/A	Enabled	N/A	
	EAN8_ReturnCheckDigit	Enabled/Disabled	Enabled	Enabled	N/A	N/A	N/A	Enabled	N/A	
	EAN13_ReturnCheckDigit	Enabled/Disabled	Enabled	Enabled	N/A	N/A	N/A	Enabled	N/A	
	Codabar	Tx StartStop (Enabled/Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
	Check Digit (DoNotVerify/VerifyDO NotTX/VerifyDoTx)	N/A	N/A	DoNotVerify	DoNotVerify	N/A	DoNotVerify	N/A	DoNotVerify	
	Concatenate(Disabled/Enabled/Required)	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled	
	Code39	Tx StartStop (Enabled/Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
	Check Digit(DoNotVerify/VerifyDO NotTX/VerifyDoTx)	N/A	N/A	DoNotVerify	DoNotVerify	N/A	DoNotVerify	N/A	DoNotVerify	
	Append (Enabled/Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled	
	Full ASCII(Enabled/Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled	
	I2of5	Check Digit (DoNotVerify/VerifyDO NotTX/VerifyDoTx)	N/A	N/A	DoNotVerify	DoNotVerify	N/A	DoNotVerify	N/A	DoNotVerify
	Code11	Check Digit (2 digits/1 digit)	N/A	N/A	2 digits	2 digits	N/A	2 digits	N/A	2 digits
	Code128	Concatenate(Disabled/Enabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
Telepen	Output(Original/Alt)	N/A	N/A	AIM	AIM	N/A	AIM	N/A	AIM	
	UPCA	VerifyChkDigit(Enabled/Disabled)	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled

		NumberSys (Enabled/ Disabled)	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		2DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
		5DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
		Req. Addenda (Enabled/ Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
		Sep. Addenda (Enabled/ Disabled)	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Coupon Code (Enabled/ Disabled)	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
	UPCE	Expand (Enabled/ Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
		Req. Addenda (Enabled/ Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
		Sep. Addenda (Enabled/ Disabled)	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		Check Digit (Enabled/ Disabled)	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		NumberSys (Enabled/ Disabled)	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		2DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
		5DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
	EAN-13	VerifyChkD gt(Enabled/ Disabled)	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		2DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
		5DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
		Req. Addenda (Enabled/ Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
		Sep. Addenda (Enabled/ Disabled)	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		ISBN Trans. (Enabled/ Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
	EAN-8	VerifyChkD gt(Enabled/ Disabled)	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
		2DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
		5DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
		Req. Addenda (Enabled/ Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
		Sep. Addenda (Enabled/ Disabled)	N/A	N/A	Enabled	Enabled	N/A	Enabled	N/A	Enabled
	MSI	Tx CheckChar (Enabled/ Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
	PosiCode	A and B/A&B LimitedA/A &B LimitedB	N/A	N/A	A&B LimitedB	A&B LimitedB	N/A	A&B LimitedB	N/A	A&B LimitedB
	GS1	UPCEAN Ver.(Enabled/ Disabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
		GS1 Emulation (No Emulate/ GS1 128 Emul/GS1 Emulate)	N/A	N/A	No Emulate	No Emulate	N/A	No Emulate	N/A	No Emulate
	PostNet	Tx CheckChar(Enabled/Di sabled)	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled
	PlanetCode	Tx CheckChar(N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A	Disabled

		Enabled/Disabled)							
Scan Options	Power	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	Disabled	Disabled
	Scan Angle	Narrow/Wide	Wide	Wide	N/A	N/A	N/A	N/A	N/A
	Filter	Normal/High	Normal	Normal	N/A	N/A	N/A	N/A	N/A
	Time Out	.5 seconds to 10 seconds	2 second(s)	2 second(s)	2 second(s)	N/A	2 second(s)	2 second(s)	2 second(s)
	Min. Barcode Length	2 to 36 characters	4 chars	4 chars	N/A	N/A	N/A	4 chars	N/A
	Min. Barcode Length	2 to 48 characters	N/A	N/A	4 chars	4 chars	N/A	4 chars	N/A
	Security Level	1 to 4 level	2 level	2 level	N/A	N/A	N/A	N/A	N/A
	Image Capture	Enabled/Disabled	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A
	Auto Trigger	Enabled/Disabled	Disabled	Disabled	Disabled	N/A	Disabled	Disabled	Disabled
	Reread Delay	Continuous, Short, Medium, Long, Extra Long	Medium	Medium	Medium	N/A	Medium	Medium	Medium
	Finger Trigger	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Partial Display	Start Position	N/A	N/A	N/A	N/A	N/A	1	1
		No. of Char(s)	N/A	N/A	N/A	N/A	N/A	0 chars	0 chars
	Action	N/A	N/A	N/A	N/A	N/A	N/A	Select	Select
Data Process	Wedge / Store	Wedge Only							
		Wedge & Store Always	Default	Default	Default	Default	Default	Default	Default
		Store Only							
		Save if Sent							
		Save if Not Sent							
	Data Format	Barcode only	Default	Default	Default	N/A	Default		
		Packet Data						Default	Default
	Data Editor/Prefix								
	Data Editor/Suffix								
	Data Editor/AIM ID	None/In Prefix/In Suffix	None	None	None	N/A	None	None	None
	Data Editor/Partial Data	Start Position	1	1	1	N/A	1	1	1
		No. of Char(s)	0 chars	0 chars	0 chars	N/A	0 chars	0 chars	0 chars
		Action	Select	Select	Select	N/A	Select	Select	Select
	Handshake	Enable/Disabled	Disabled	Disabled	Disabled	N/A	Disabled	N/A	N/A
	Terminator	None, CR, LF, CR+LF, Tab, Right Arrow, Left Arrow, Down Arrow, Up Arrow	CR+LF	CR+LF	CR+LF	CR+LF	CR+LF	CR+LF	CR+LF
	Chk Duplicate	Enabled/Disabled	Disabled	Disabled	Disabled	N/A	Disabled	Disabled	Disabled
	Enter Key	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	Disabled	Disabled
	Extend Key	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	Disabled	Disabled
	Age Verify	Verification Enabled/Disabled	N/A	N/A	Disabled	Disabled	N/A	Disabled	N/A
		Age Default	N/A	N/A	21	21	N/A	21	N/A
BT Config	ConnectDevice (Non Mfi mode)	SPP	Default	Default	Default	Default	Default	N/A	N/A
		HID iOS						N/A	N/A
		SPP2.0						N/A	N/A
		HID normal						N/A	N/A
	ConnectDevice (Mfi mode)	SPP							
		MFi	Default	Default	Default	Default	Default	Default	Default
	Auto Connect	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	N/A	N/A
	Auto reconnect	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	Auto Power On	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	Auto Power On/Power On Time	disabled, 1sec to 10second(s)	Disabled	Disabled	Disabled	Disabled	Disabled	N/A	N/A
	Auto Power Off	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	N/A	N/A
	Auto Power Off/Beep Warning	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	N/A	N/A

	Auto Power Off/Power Off Time	1 to 30 minutes	Disabled	Disabled	Disabled	Disabled	Disabled	N/A	N/A
	PowerOff Msg	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	N/A	N/A
	MAC Address	12 Characters Bluetooth MAC Address							
	BT FW Version	v1.2.xrt Bluetooth Firmware Version							
	Wakeup Nulls	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	N/A	N/A
	Connect Alert	Enabled/Disabled	N/A						
	BT Toggle	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	N/A	N/A
	DisconnectBtn	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	N/A	N/A
	HID AutoLock	disabled,1,2,3,4,5,10,15 minutes	1 minutes	1 minutes	1 minutes	1 minutes	1 minutes	N/A	N/A
	HID Keyboard	US,German,French,Italian,Spanish	US	US	US	US	US	N/A	N/A
	HID Delay/Initial	Disabled,1,2,3,5,10 secs	Disabled	Disabled	Disabled	Disabled	Disabled	N/A	N/A
	HID Delay/Inter char	Disabled,10,20,30,50,100msec	Disabled	Disabled	Disabled	Disabled	Disabled	N/A	N/A
	HID Ctrl Char	Disabled, Alt+Numpad, ^+Character, Replace to	Disabled	Disabled	Disabled	Disabled	Disabled	N/A	N/A
BT Service	Power	Enabled/Disabled	Enabled						
	Pairing	Pairing neighboring Bluetooth devices							
	Discovering	Discovering neighboring Bluetooth devices						N/A	N/A
	Connecting to	View Connect to Bluetooth device							
	Disconnect		N/A	N/A	N/A	N/A	N/A		
	HID Sync							N/A	N/A
	Auto Pairing	Enabled/Disabled	Enabled						
USB Config (M mode)	USB Mode	Disabled/USB Disk/USB HID	N/A						
NFC Config (N mode)	NFC Power	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	N/A	N/A	Disabled
	Data Format	Barcode only/Packet Data	Packet Data	Packet Data	Packet Data	Packet Data	N/A	N/A	N/A
	UID Only	Enabled/Disabled	N/A	N/A	N/A	Disabled	N/A	N/A	N/A
GPS Config (G mode)	GPS Power	Disabled	N/A						
	Power Mode	Normal/Power Save	N/A						
	Bypass Data	Enabled/Disabled	N/A						
	Acqurie Test		N/A						
	Reset GPS		N/A						
System Config	Memory Size(KDC500)	0.5/2.5,1/2,2/1,3/0	N/A	N/A	N/A	N/A	N/A	0.5/2.5	0.5/2.5
	Memory Status	No. of Stored Barcodes	N/A	N/A	N/A	N/A	N/A		
		Free Memory Available	N/A	N/A	N/A	N/A	N/A		
	Reset Memory	Memory (Empties Data)	N/A	N/A	N/A	N/A	N/A		
		Application Memory	N/A						
		BT Registry (KDC100 Not use)	N/A						
	Auto Erase	Enabled/Disabled	Enabled						
	Sleep Timeout	Disabled, 1sec to 10minute(s)	5 second(s)						
	Date / Time	YYYY:MM:D D & HH:MM:SS	N/A						

	Battery	% of Battery Charge Available	N/A	N/A	N/A	N/A	N/A	N/A		
	Version	Firmware Version & Serial No.	N/A	N/A	N/A	N/A	N/A	N/A		
	Button Lock	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Beep Alert /Beep Sound	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled
	Beep Alert /Power On Beep	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled
	Beep Alert /Beep On Connect	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled
	Beep Alert /Beep On Scan	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled
	Beep Alert /BeepOnMSCard	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	Enabled	Enabled	
	Beep Alert /BeepOnCCard	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	Enabled	Enabled	
	Beep Alert /BeepOnNFCCard	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	Enabled	Enabled	
	Beep Volume	Low/High	Low	Low	Low	Low	Low	Low	Low	Low
	Mfi (i-chip installed)	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	N/A	N/A	
	Auto Exit	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	Enabled	Enabled	
	Port Status	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	Enabled	Enabled	
	Display Format	Time & Battery / Type & Time / Type & Battery / Memory Status / GPS Data(KDC250 only)/Barcode Only	N/A	N/A	N/A	N/A	N/A	Time & Battery	Time & Battery	
	Menu Barcode	Enabled/Disabled	N/A	N/A	Disabled	Disabled	N/A	Disabled	Disabled	Disabled
	Scrolling	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Brightness	1 to 15 level(8 level)	N/A	N/A	N/A	N/A	N/A	8	8	
	Keypad	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	Disabled	Disabled	
	Language	US(English)/Korean/Japanese	N/A	N/A	N/A	N/A	N/A	US(English)	US(English)	
	Factory Default	Restores Default Settings								
MSR Config	Power	Enabled/Disabled /	N/A	N/A	N/A	N/A	N/A	Disabled	Disabled	
	Data Format	MSR Data Only	N/A	Default	N/A	Default	Default	N/A	N/A	N/A
	Packet Data		N/A		N/A			N/A	N/A	N/A
	Use Track1	Enabled/Disabled	N/A	Enabled	N/A	Enabled	Enabled	N/A	Enabled	Enabled
	Use Track2	Enabled/Disabled	N/A	Enabled	N/A	Enabled	Enabled	N/A	Enabled	Enabled
	Use Track3	Enabled/Disabled	N/A	Enabled	N/A	Enabled	Enabled	N/A	Enabled	Enabled
	Null Check Track1	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	Disabled	Disabled	
	Null Check Track2	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	Enabled	Enabled	
	Null Check Track3	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A	Disabled	Disabled	
	Beep on error reading	Enabled/Disabled	N/A	Disabled	N/A	Disabled	Disabled	N/A	Enabled	Enabled
	Encrypt MSR Data	Enabled/Disabled	N/A	Disabled	N/A	Disabled	Disabled	N/A	N/A	N/A
	AES Key Length	128bit/192bit/256bit	N/A	128bit	N/A	128bit	N/A	N/A	N/A	N/A
	Card Type	ISO/OTHER 1/AAMVA	N/A	ISO	N/A	ISO	ISO	N/A	ISO	ISO
	Track Separator	None/Space/Comma/Semicolon/CR/LF/CR&LF/Tab	N/A	None	N/A	None	None	N/A	N/A	N/A
	Attach Start/End Sentinel		N/A	Enabled	N/A	Enabled	Enabled	N/A	Enabled	Enabled
ICCR Config	Partial Data Start Position		N/A	1	N/A	1	1	N/A	N/A	N/A
	Partial Data Length		N/A	0	N/A	0	0	N/A	N/A	N/A
	Partial Data Action	Erase/Select	N/A	Select	N/A	Select	Select	N/A	N/A	N/A
	Power	Enabled/Disabled /	N/A	N/A	N/A	N/A	N/A	Disabled	Disabled	
	IFD Number		N/A	N/A	N/A	N/A	N/A			
	Config Number		N/A	N/A	N/A	N/A	N/A			
Key Mgmt	Stored Keys		N/A	N/A	N/A	N/A	N/A			

	Inject Keys		N/A	N/A	N/A	N/A	N/A	N/A		
<i>Sensitive/ Set Date/Time</i>	Date		N/A	N/A	N/A	N/A	N/A	N/A		
	Time		N/A	N/A	N/A	N/A	N/A	N/A		
<i>Sensitive/ Set Self-Test</i>			N/A	N/A	N/A	N/A	N/A	N/A		
<i>Sensitive/ Set Passwords</i>	1st Password		N/A	N/A	N/A	N/A	N/A	N/A		
	2nd Password		N/A	N/A	N/A	N/A	N/A	N/A		
<i>Sensitive/ Key Mgmt</i>	Stored Keys		N/A	N/A	N/A	N/A	N/A	N/A		
	Inject Keys		N/A	N/A	N/A	N/A	N/A	N/A		
	Clear Keys		N/A	N/A	N/A	N/A	N/A	N/A		
<i>Sensitive/ Card Encrypt</i>		Plaintext / TDES / AES	N/A	N/A	N/A	N/A	N/A	N/A	AES	AES
<i>UHF Configuration (UHF model)</i>	UHF Power	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	Disabled	N/A	N/A
	Power On Time	500ms/1sec 1.5sec/2sec c/2.5sec/3sec ec/3.5sec/4sec sec/4.5sec/ 5sec	N/A	N/A	N/A	N/A	N/A	1 second	N/A	N/A
	Power Off Time	500ms/1sec 1.5sec/2sec c/2.5sec/3sec ec/3.5sec/4sec sec/4.5sec/ 5sec	N/A	N/A	N/A	N/A	N/A	1.5 second	N/A	N/A
	Power Level	0/1/2/3/4/5/ 6/7	N/A	N/A	N/A	N/A	N/A	0	N/A	N/A
	Data Format	Hexa Decimal / Binary	N/A	N/A	N/A	N/A	N/A	Hexa Decimal	N/A	N/A

Top Menu	Sub Menu	Options	KDC270L	KDC270D	KDC270C	KDC470L	KDC470D	KDC470C
KDC Mode	Normal		Default	Default	Default	Default	Default	Default
	Application		Custom Application	Custom Application	Custom Application	N/A	N/A	N/A
View Data	View/Delete		View/ Delete Data	View/ Delete Data	View/ Delete Data	N/A	N/A	N/A
Set Barcodes (270L/270D/ 470L/470D)	EAN13	Enabled/ Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	EAN8	Enabled/ Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	UPCA	Enabled/ Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	UPCE	Enabled/ Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	CODE39	Enabled/ Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	ITF14	Enabled/ Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	CODE128	Enabled/ Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	I2of5	Enabled/ Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	CODABAR	Enabled/ Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	GS1-128	Enabled/ Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	CODE93	Enabled/ Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	CODE35	Enabled/ Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	BooklandEAN	Enabled/ Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
	EAN13withAddon	Enabled/ Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
	EAN8withAddon	Enabled/ Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
Set Barcodes (270C/470C)	1D Symbology	Codabar	N/A	N/A	Enabled	N/A	N/A	Enabled
		Code 11	N/A	N/A	Enabled	N/A	N/A	Enabled
		Code 32	N/A	N/A	Enabled	N/A	N/A	Enabled
		Code 39	N/A	N/A	Enabled	N/A	N/A	Enabled
		Code 93	N/A	N/A	Enabled	N/A	N/A	Enabled
		Code 128	N/A	N/A	Enabled	N/A	N/A	Enabled
		EAN-8	N/A	N/A	Enabled	N/A	N/A	Enabled
		EAN-13	N/A	N/A	Enabled	N/A	N/A	Enabled
		GS1 Composit	N/A	N/A	Enabled	N/A	N/A	Enabled
		I2of5	N/A	N/A	Enabled	N/A	N/A	Enabled
		Matrix 2of5	N/A	N/A	Enabled	N/A	N/A	Enabled
		MSI	N/A	N/A	Enabled	N/A	N/A	Enabled
		Plessey	N/A	N/A	Enabled	N/A	N/A	Enabled
		PosiCode	N/A	N/A	Enabled	N/A	N/A	Enabled
		GS1 Omni	N/A	N/A	Enabled	N/A	N/A	Enabled
2D Symbology	GS1 Limited	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	GS1 Expanded	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	S2of5 Ind	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	S2of5 IATA	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	TLC39	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	Telepen	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	Trioptic	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	UPCA	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	UPCE0	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	UPCE1	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled

		QRCode	N/A	N/A	Enabled	N/A	N/A	Enabled
		HanXin Code	N/A	N/A	Enabled	N/A	N/A	Enabled
Postal Codes	Postnet	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	PlanetCode	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	UK Post	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	Mayada Post	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	Kix Post	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	Australia Post	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	Japan Post	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	China Post	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	Korea Post	N/A	N/A	Enabled	N/A	N/A	N/A	Enabled
	OCR	OCR Off	N/A	N/A	Enabled	N/A	N/A	Enabled
Barcode Options (270L/270D/470L/470D)	OCR A	N/A	N/A	Disabled	N/A	N/A	Disabled	Disabled
	OCR B	N/A	N/A	Disabled	N/A	N/A	Disabled	Disabled
	OCR USC	N/A	N/A	Disabled	N/A	N/A	Disabled	Disabled
	OCR MICR	N/A	N/A	Disabled	N/A	N/A	Disabled	Disabled
	OCR SEMI	N/A	N/A	Disabled	N/A	N/A	Disabled	Disabled
	CodaBar_NoStartStopChars	Enabled/Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
	UPCE_as_UPCA	Enabled/Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
	EAN8_as_EAN13	Enabled/Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
	UPCE_as_EAN13	Enabled/Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
	ReturnCheckDigit	Enabled/Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
	VerifyCheckDigit	Enabled/Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
	UPCA_as_EAN13	Enabled/Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
	I2of5_VerifyCheckDigit	Enabled/Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
	Code39_VerifyCheckDigit	Enabled/Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
	I2of5_ReturnCheckDigit	Enabled/Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
	Code39_ReturnCheckDigit	Enabled/Disabled	Disabled	Disabled	N/A	Disabled	Disabled	N/A
Barcode Options (270C/470C)	UPCE_ReturnCheckDigit	Enabled/Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	UPCA_ReturnCheckDigit	Enabled/Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	EAN8_ReturnCheckDigit	Enabled/Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	EAN13_ReturnCheckDigit	Enabled/Disabled	Enabled	Enabled	N/A	Enabled	Enabled	N/A
	Codabar	Tx StartStop (Enabled/Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
	Check Digit (DoNotVerify/VerifyDO NotTX/VerifyDoTx)	N/A	N/A	DoNotVerify	N/A	N/A	DoNotVerify	
	Concatenate(Disabled/Enabled/Required)	N/A	N/A	Enabled	N/A	N/A	Enabled	
	Code39	Tx StartStop (Enabled/Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
	Check Digit(DoNotVerify/VerifyDO NotTX/VerifyDoTx)	N/A	N/A	DoNotVerify	N/A	N/A	DoNotVerify	
	Append (Enabled/Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled	
	Full ASCII(Enabled/Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled	
	I2of5	Check Digit (DoNotVerify/VerifyDO NotTX/VerifyDoTx)	N/A	N/A	DoNotVerify	N/A	N/A	DoNotVerify
	Code11	Check Digit (2 digits/1 digit)	N/A	N/A	2 digits	N/A	N/A	2 digits
	Code128	Concatenate(Disabled/Enabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
	Telepen	Output(Original/Alt)	N/A	N/A	Alt	N/A	N/A	Alt
	UPCA	VerifyChkDigit(Enabled/Disabled)	N/A	N/A	Enabled	N/A	N/A	Enabled

		NumberSys (Enabled/ Disabled)	N/A	N/A	Enabled	N/A	N/A	Enabled
		2DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
		5DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
		Req. Addenda (Enabled/ Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
		Sep. Addenda (Enabled/ Disabled)	N/A	N/A	Enabled	N/A	N/A	Enabled
		Coupon Code (Enabled/ Disabled)	N/A	N/A	Enabled	N/A	N/A	Enabled
	UPCE	Expand (Enabled/ Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
		Req. Addenda (Enabled/ Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
		Sep. Addenda (Enabled/ Disabled)	N/A	N/A	Enabled	N/A	N/A	Enabled
		Check Digit (Enabled/ Disabled)	N/A	N/A	Enabled	N/A	N/A	Enabled
		NumberSys (Enabled/ Disabled)	N/A	N/A	Enabled	N/A	N/A	Enabled
		2DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
		5DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
	EAN-13	VerifyChkD gt(Enabled/ Disabled)	N/A	N/A	Enabled	N/A	N/A	Enabled
		2DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
		5DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
		Req. Addenda (Enabled/ Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
		Sep. Addenda (Enabled/ Disabled)	N/A	N/A	Enabled	N/A	N/A	Enabled
		ISBN Trans. (Enabled/ Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
	EAN-8	VerifyChkD gt(Enabled/ Disabled)	N/A	N/A	Enabled	N/A	N/A	Enabled
		2DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
		5DgtAdden da(Enabled /Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
		Req. Addenda (Enabled/ Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
		Sep. Addenda (Enabled/ Disabled)	N/A	N/A	Enabled	N/A	N/A	Enabled
	MSI	Tx CheckChar (Enabled/ Disabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
	PosiCode	A and B/A&B LimitedA/A &B LimitedB	N/A	N/A	A&B LimitedB	N/A	N/A	A&B LimitedB
	GS1	UPCEAN Ver.(Enable d/Disable	N/A	N/A	Disabled	N/A	N/A	Disabled
		GS1 Emulation (No Emulate/ GS1 128 Emul/GS1 Emulate)	N/A	N/A	No Emulate	N/A	N/A	No Emulate
	PostNet	Tx CheckChar(Enabled/Di sabled)	N/A	N/A	Disabled	N/A	N/A	Disabled
	PlanetCode	Tx CheckChar(N/A	N/A	Disabled	N/A	N/A	Disabled

		Enabled/Disabled)					
Scan Options	Power	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A
	Scan Angle	Narrow/Wide	Wide	N/A	Wide	N/A	N/A
	Filter	Normal/High	Normal	N/A	Normal	N/A	N/A
	Time Out	.5 seconds to 10 seconds	2 second(s)				
	Min. Barcode Length	2 to 36 characters	4 chars	4 chars	N/A	4 chars	N/A
	Min. Barcode Length	2 to 48 characters	N/A	N/A	4 chars	N/A	4 chars
	Security Level	1 to 4 level	2 level	N/A	2 level	N/A	N/A
	Image Capture	Enabled/Disabled	N/A	N/A	Disabled	N/A	N/A
	Auto Trigger	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	Reread Delay	Continuous, Short, Medium, Long, Extra Long	Medium	Medium	Medium	Medium	Medium
	Finger Trigger	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A
	Partial Display	Start Position	1	1	1	N/A	N/A
		No. of Char(s)	0 chars	0 chars	0 chars	N/A	N/A
		Action	Select	Select	Select	N/A	N/A
Data Process	Wedge / Store	Wedge Only					
		Wedge & Store Always	Default	Default	Default	Default	Default
		Store Only					
		Save if Sent					
		Save if Not Sent					
	Data Format	Barcode only	Default	Default	Default	Default	Default
		Packet Data					
	Data Editor/Prefix						
	Data Editor/Suffix						
	Data Editor/AIM ID						
	Data Editor/Partial Data	None/In Prefix/In Suffix	None	None	None	None	None
		Start Position	1	1	1	1	1
		No. of Char(s)	0 chars				
		Action	Select	Select	Select	Select	Select
	Handshake	Enable/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	Terminator	None, CR, LF, CR+LF, Tab, Right Arrow, Left Arrow, Down Arrow, Up Arrow	CR+LF	CR+LF	CR+LF	CR+LF	CR+LF
	Chk Duplicate	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	Enter Key	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A
	Extend Key	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A
	Age Verify	Verification Enabled/Disabled	N/A	N/A	Disabled	N/A	Disabled
		Age Default	N/A	N/A	21	N/A	N/A
BT Config	ConnectDevice (Non Mfi mode)	SPP	Default	Default	Default	Default	Default
		HID iOS					
		SPP2.0					
		HID normal					
	ConnectDevice (Mfi mode)	SPP					
		MFi	Default	Default	Default	Default	Default
	Auto Connect	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	Auto Reconnect	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	Auto Power On	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	Auto Power On/Power On Time	disabled, 1sec to 10second(s)	Disabled	Disabled	Disabled	Disabled	Disabled
	Auto Power Off	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	Auto Power Off/Beep Warning	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled

	Auto Power Off/Power Off Time	1 to 30 minutes	Disabled	Disabled	Disabled	Disabled	Disabled
	PowerOff Msg	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	MAC Address	12 Characters Bluetooth MAC Address					
	BT FW Version	v1.2.xrt Bluetooth Firmware Version					
	Wakeup Nulls	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	Connect Alert	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A
	BT Toggle	Enabled/Disabled	Enabled	Enabled	Disabled	Disabled	Disabled
	DisconnectBtn	Enabled/Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
	HID AutoLock	disabled,1,2 ,3,4,5,10,15 minutes	1 minutes	1 minutes	1 minutes	1 minutes	1 minutes
	HID Keyboard	US, German, French ,Italian, Spanish	US	US	US	US	US
	HID Delay/Initial	Disabled, 1,2,3,5,10 secs	Disabled	Disabled	Disabled	Disabled	Disabled
	HID Delay/Inter char	Disabled,10 , 20, 30, 50, 100msec	Disabled	Disabled	Disabled	Disabled	Disabled
	HID Ctrl Char	Disabled, Alt+Numpad, ^+Character, Replace to	Disabled	Disabled	Disabled	Disabled	Disabled
BT Service	Power	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	Enabled
	Pairing	Pairing neighboring Bluetooth devices					
	Discovering	Discovering neighboring Bluetooth devices					
	Connecting to	View Connect to Bluetooth device					
	Disconnect		N/A	N/A	N/A	N/A	N/A
	HID Sync						
	Auto Pairing	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	Enabled
USB Config (M mode)	USB Mode	Disabled/USB Disk/USB HID	Disabled	Disabled	N/A	N/A	N/A
NFC Config (N mode)	NFC Power	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A
	Data Format	Barcode only/Packet Data	N/A	N/A	N/A	N/A	N/A
	UID Only	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A
GPS Config (G mode)	GPS Power	Disabled	N/A	N/A	N/A	N/A	N/A
	Power Mode	Normal/Power Save	N/A	N/A	N/A	N/A	N/A
	Bypass Data	Enabled/Disabled	N/A	N/A	N/A	N/A	N/A
	Acqurie Test		N/A	N/A	N/A	N/A	N/A
	Reset GPS		N/A	N/A	N/A	N/A	N/A
System Config	Memory Size	0.5/6.5, 1/6, 2/5.3/4, 4/3, 5/2, 6/1, 7/0	0.5/6.5	0.5/6.5	0.5/6.5	0.5/6.5	0.5/6.5
	Memory Status	No. of Stored Barcodes					
		Free Memory Available					
	Reset Memory	Memory (Empties Data)					
		Application Memory			N/A	N/A	N/A
		BT Registry					
	Auto Erase	Enabled/Disabled	Enabled	Enabled	Enabled	Enabled	Enabled
	Sleep Timeout	Disabled, 1sec to 10minute(s)	5 second(s)				

	Date / Time	YYYY:MM:D D & HH:MM:SS					
Battery	% of Battery Charge Available						
Version	Firmware Version & Serial No.	N/A	N/A	N/A	N/A	N/A	N/A
Button Lock	Enabled/ Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
Beep Alert /Beep Sound	Enabled/ Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled
Beep Alert /Power On Beep	Enabled/ Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled
Beep Alert /Beep On Connect	Enabled/ Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled
Beep Alert /Beep On Scan	Enabled/ Disabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled
Beep Alert /BeepOnMSCard	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	N/A
Beep Alert /BeepOnCCard	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	N/A
Beep Alert /BeepOnNFCCard	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	N/A
Beep Volume	Low/High	Low	Low	Low	Low	Low	Low
Mfi (i-chip installed)	Enabled/Di sabled	Enabled	Enabled	Enabled	Enabled	Enabled	Enabled
Auto Exit	Enabled/ Disabled	Enabled	Enabled	Enabled	N/A	N/A	N/A
Port Status	Enabled/ Disabled	Enabled	Enabled	Enabled	N/A	N/A	N/A
Display Format	Time & Battery / Type & Time / Type / Battery / Memory Status / GPS Data(KDC2 50 only)/Barco de Only	Time & Battery	Time & Battery	Time & Battery	N/A	N/A	N/A
Menu Barcode	Enabled/ Disabled	N/A	N/A	Disabled	N/A	N/A	Disabled
Scrolling	Enabled/ Disabled	Enabled	Enabled	Enabled	N/A	N/A	N/A
Brightness	1 to 15 level(8 level)	8	8	8	N/A	N/A	N/A
Keypad	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	N/A
Language	None/ US(English)/ French/ Italian/ Spanish/ Korean/ Japanese	None	None	None	N/A	N/A	N/A
Factory Default	Restores Default Settings						
MSR Config							
Power	Enabled/ Disabled /	N/A	N/A	N/A	N/A	N/A	N/A
Data Format	MSR Data Only	N/A	N/A	N/A	N/A	N/A	N/A
	Packet Data	N/A	N/A	N/A	N/A	N/A	N/A
Use Track1	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	N/A
Use Track2	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	N/A
Use Track3	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	N/A
Null Check Track1	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	N/A
Null Check Track2	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	N/A
Null Check Track3	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	N/A
Beep on error reading	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	N/A
Encrypt MSR Data	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A	N/A
AES Key Length	128bit/192b it/256bit	N/A	N/A	N/A	N/A	N/A	N/A
Card Type	ISO/OTHER 1/AAMVA	N/A	N/A	N/A	N/A	N/A	N/A
Track Separator	None/Spac e/Comma/S emicolon/C R/LF/CR&L F/Tab	N/A	N/A	N/A	N/A	N/A	N/A
Attach Start/End Sentinel		N/A	N/A	N/A	N/A	N/A	N/A
Partial Data Start Position		N/A	N/A	N/A	N/A	N/A	N/A
Partial Data Length		N/A	N/A	N/A	N/A	N/A	N/A
Partial Data Action	Erase/ Select	N/A	N/A	N/A	N/A	N/A	N/A

<i>ICCR Config</i>	Power	Enabled/ Disabled /	N/A	N/A	N/A	N/A	N/A
	IFD Number		N/A	N/A	N/A	N/A	N/A
	Config Number		N/A	N/A	N/A	N/A	N/A
<i>Key Mgmt</i>	Stored Keys		N/A	N/A	N/A	N/A	N/A
	Inject Keys		N/A	N/A	N/A	N/A	N/A
<i>Sensitive/ Set Date/Time</i>	Date		N/A	N/A	N/A	N/A	N/A
	Time		N/A	N/A	N/A	N/A	N/A
<i>Sensitive/ Set Self-Test</i>			N/A	N/A	N/A	N/A	N/A
<i>Sensitive/ Set Passwords</i>	1st Password		N/A	N/A	N/A	N/A	N/A
	2nd Password		N/A	N/A	N/A	N/A	N/A
<i>Sensitive/ Key Mgmt</i>	Stored Keys		N/A	N/A	N/A	N/A	N/A
	Inject Keys		N/A	N/A	N/A	N/A	N/A
	Clear Keys		N/A	N/A	N/A	N/A	N/A
<i>Sensitive/ Card Encrypt</i>		Plaintext / TDES / AES	N/A	N/A	N/A	N/A	N/A
<i>UHF Configuration (UHF model)</i>	UHF Power	Enabled/ Disabled	N/A	N/A	N/A	N/A	N/A
	Power On Time	500ms/1sec /1.5sec/2sec c/2.5sec/3sec ec/3.5sec/4sec /4.5sec/ 5sec	N/A	N/A	N/A	N/A	N/A
	Power Off Time	500ms/1sec /1.5sec/2sec c/2.5sec/3sec ec/3.5sec/4sec /4.5sec/ 5sec	N/A	N/A	N/A	N/A	N/A
	Power Level	0/1/2/3/4/5/ 6/7	N/A	N/A	N/A	N/A	N/A
	Data Format	Hexa Decimal / Binary	N/A	N/A	N/A	N/A	N/A

Table 3 - KDC Menu

KDC Mode Menu

The KDC Mode Menu has two options – Normal Mode and Application Mode.

Normal

This is the default mode that provides basic barcode scanning. In normal mode, barcode data may be manipulated directly through the KDC or through KTSync during the synchronization process.

Application

This mode enables the user to run the user application created by the Application Generation Tool, as described in [Chapter 6 Application Generation](#).

View Data Menu

This menu option enables the user to view and/or delete barcodes stored in the KDC. In the case of the KDC20/30, you may delete the last scanned barcode by pressing the DELETE button on the right side of the unit.

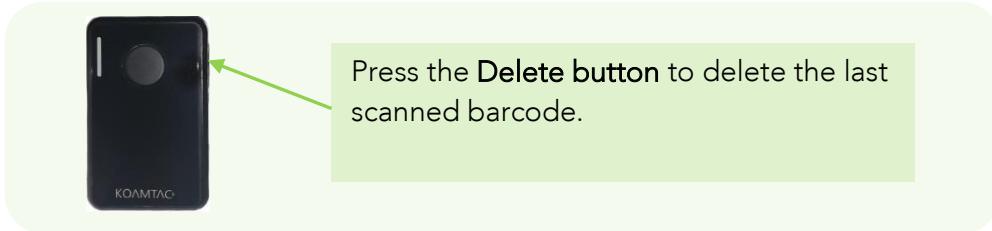


Figure 14 - Delete Function in KDC20/30

Set Barcodes Menu

This menu lists all the barcode symbologies supported by the KDC and enables the user to select the barcode symbologies to be scanned. For maximum scan performance, you should select only the symbologies that you will be scanning. Please refer to [10. Appendix A – 10.1 Symbologies](#) for a detailed listing of symbologies supported by the KDC.

Code Options Menu

The KDC supports various Code Options, including Transmission of Start and Stop Characters, Symbology Conversion, Verification of Optional Check Character, and Transmission of Check Digit. Please refer to [10. Appendix A – 10.2 Code Options](#) for a detailed explanation of each option.

Scan Options Menu

Power(KDC500 only)

Users may choose to turn the Scan Engine Power on or off. Select between Enable and Disable.

Scan Angle (Opticon laser model only)

This option enables the user to configure the laser beam angle to the barcode. There are two options for scan angle: Wide and Narrow. Wide is 54° and Narrow is 27°. The default is wide.

Filter (Opticon laser model only)

This menu enables the user to change the Filter mode from Normal to High for poor quality barcodes. The default is Normal.

Timeout

In this menu, you may set the scan timeout. The timeout options are from 500ms up to 10 seconds. The default is 2 seconds.

Minimum Barcode Length

This option enables the user to set a barcode length from 2 characters to 36 characters (KDC20/100/200/250/270L/270D/350L/410/411/415/470L/470D/500L) or 2 characters to 48 characters (KDC30/270C/300/350C/420/421/425/450/470C/500C). It is strongly recommended that you maximize the minimum barcode length setting to prevent possible errors.

- The default minimum barcode length of KDC20/100/200/250/270L/270D/350L/410/411/415/470L/470D/500L is 4 characters.
- The default minimum barcode length of KDC30/270C/300/350C/420/421/425/450/470C/500C is as follows:

		Minimum (Default)	Maximum (Default)
1D Symbology	Codabar	2(4)	60(60)
	Code 11	1(4)	80(80)
	Code 32	-	-
	Code 39	0(0)	48(48)
	Code 93	0(0)	80(80)
	Code 128	0(0)	80(80)
	EAN-8	-	-
	EAN-13	-	-
	GS1 Composite	-	-
	I2of5	2(4)	80(80)
	Matrix 2of5	1(4)	80(80)
	MSI	4(4)	48(48)
	Plessey	4(4)	48(48)
	PosiCode	2(4)	80(48)
	GS1 Omni	-	-
	GS1 Limited	-	-
	GS1 Expanded	4(4)	74(74)

	S2of5 Ind	1(4)	48(48)
	S2of5 IATA	1(4)	48(48)
	TCL39	-	-
	Telepen	1(1)	60(60)
	Trioptic	-	-
	UPCA	-	-
	UPCE0	-	-
	UPCE1	-	-
2D Symbology	AztecCode	1(1)	3750(3750)
	AztecRunes		
	CodablockF	1(1)	2048(2048)
	Code16K	0(1)	160(160)
	Code49	1(1)	81(81)
	DataMatrix	1(1)	1500(1500)
	MaxiCode	1(1)	150(150)
	MicroPDF	1(1)	366(366)
	PDF417	1(1)	2750(2750)
	QRCode	1(1)	3500(3500)
	HanXin Code	-	-
Postal Codes	Postnet	-	-
	PlanetCode	-	-
	UK Post	-	-
	Mayada Post	-	-
	Kix Post	-	-
	Australia Post	-	-
	Japan Post	-	-
	China Post	2(4)	80(80)
	Korea Post	2(4)	80(48)
OCR	OCR Off	-	-
	OCR A	-	-
	OCR B	-	-
	OCR Passport	-	-
	OCR MICR	-	-
	OCR SEMI	-	-

Table 4 - KDC30/270C/300/350C/420/450/470C/500C Minimum Barcode Length

Image Capture (KDC30/270C/300/350C/420/421/425/450/470C)

This option enables the user to capture an image in JPEG format in C:\myData folder. You

should enable the image capture option first, and then press the Scan button to start the aiming. A green aiming light will illuminate and an image will be taken upon release of the Scan button. KDC will disable the image capture option if the user presses the scan button for 5 seconds.

Security Level (Laser Model only)

This menu enables the user to ensure an accurate barcode reading by setting the number of times the KDC will read a barcode. Security Level is set from 1 up to 4. The higher security level means readings are more reliable; however, some performance degradation is likely. For poor quality barcodes, we recommend increasing the security level. The default is 2.

Auto Trigger

Once enabled, Auto Trigger enables the user to scan a barcode automatically. You may adjust reread delay from continuous to extra-long. Auto Trigger mode always enables the duplicate check option.(1D Model only)

Note

- *USB cable insertion requirement is removed from FW2.85/86.O and FW 3.02.*
- *You may exit the auto trigger mode by pressing the scan button for 3 seconds.*

Reread Delay

You may adjust the reread delay from continuous to extra-long.

Partial Display

This option enables the user to display partial data. You may define the start position and number of characters to be displayed.

Data Process Menu

Wedge/Store

The KDC provides five modes of data transmission in keyboard wedging mode.

- **Wedge Only:** Barcode data is NOT stored in memory but transmitted to the host.
- **Wedge & Store Only:** Barcode data is stored in memory and transmitted to the host.
- **Store Only:** Barcode data is stored in memory but NOT transmitted to the host.
- **Save if Sent:** If data transmission is successful, barcode data is stored in memory.
- **Save if Not Sent:** If data transmission is NOT successful, barcode data is stored in memory.

Data Format

The KDC provides two data formats, Barcode Only and Packet Data.

- **Barcode Only:** The KDC transmits scanned barcodes only. You may incorporate appropriate data transmission error detection and correction mechanisms in this mode. KDC supports a selection of various termination characters for Barcode Only format. You may select <NONE>, <CR>, <LF>, <CR+LF> or <TAB> as the termination character.
- **Packet Data:** KDC transmits packet data with checksum to minimize transmission errors. KTSync sets Data Format to Packet Data format upon execution.
 - You may change **Data Format** to **Barcode Only** if you would prefer to use the Barcode Only mode. However, the KDC would stay in Packet Data mode if KTSync is aborted abnormally. If this is the case, you may have to change the KDC back to Barcode Only mode manually.
 - **Barcode Index:** KDC20i/30i/200i/250i/300i/270i/350i/400i/470i/500i add 4 bytes barcode index to maintain last synchronized barcode information.

Note

- This optional index would be added if data format is "Packet Data".
- 4 bytes index would be added before "@" when responding to "p" command.
- 4 bytes index plus "@" character would be added after checksum byte if the user scans a barcode and wedges to the host.

Data Editor

The KDC provides various data editing options.

- **Prefix** - Enables user to add a prefix to scanned data that may then be wedged to the host. The Prefix must be defined in the KTSync. The maximum length for a Prefix is 11 characters.

Note

This Prefix option is different from the Prefix option in KTSync, which attaches the prefix to data during synchronization.

Note

The user may also define the prefix by scanning characters defined in Appendix C&D(E&F for KDC500). as shown below in the special barcodes.

- ➔ KDC20/100/200/250/270L/270D/350L/410/411/415/470L/470D/500L

Prefix Enter Start



83000

Prefix/Suffix Enter Finish



83002

➔ KDC30/270C/300/350C/420/421/425/450/470C/500C

Prefix Enter Start



TMKDC83000.

Prefix/Suffix Enter Finish



TMKDC83002.

Note

Users may also delete or display current prefixes by scanning the following special barcodes.

➔ KDC20/100/200/250/270L/270D/350L/410/411/415/470L/470D/500L

Delete Prefix



83004

Display Prefix



83004

➔ KDC30/270C/300/350C/420/421/425/450/470C/500C

Delete Prefix



TMKDC83004.

Display Prefix



TMKDC83006.

- **Suffix** - Enables the user to add a suffix to scanned data, which may then be wedged to the host. The suffix must be defined in the KTSync. The maximum length for a suffix is 11 characters.

Note

- This Suffix option is different from the Suffix option in KTSync, which appends the suffix to data during synchronization.

Note

- The user may also define the suffix by scanning characters defined in Appendix C&D(E&F for KDC500), as shown below in the special barcodes.

➔ 20/100/200/250/270L/270D/350L/410/411/415/470L/470D/500L

Suffix Enter Start



83001

Prefix/Suffix Enter Finish



83002

➔ KDC30/270C/300/350C/420/421/425/450/470C/500C

Suffix Enter Start



TMKDC83001.

Prefix/Suffix Enter Finish



↑MKDC83002.

Note

The user may also delete or display a current suffix by scanning the following special barcodes.

► KDC20/100/200/250/270L/270D/350L/410/411/415/470L/470D/500L

Delete Suffix



83005

Display Suffix



83007

► KDC30/270C/300/350C/420/421/425/450/470C/500C

Delete Suffix



↑MKDC83005.

Display Suffix



↑MKDC83007.

- **AIM ID** - Enables the user to add AIM ID to scanned data, which may then be wedged to the host. AIM ID can be added to the end of a Prefix or Suffix.
- **Partial Data:** Enables the user to store and/or transfer partial data. The user defines the start position and number of characters to be stored and/or transferred. The user also can select if taking or erasing the characters selected with Start position and No of char(s).

➤ Start position

- ◆ This option specifies the start position of data.
- No of char(s)
 - ◆ This option specifies the length of data. The '0' means all data.
- Action
 - ◆ This option selects if erasing or taking the specified data.

Handshake(Deprecated)

KDC provides Handshake mode when Data Format is set to Packet Data.

- Handshake Mode will increase the reliability of barcode data transmission.
- The default mode for Handshake is disabled.
- Data transmission speed is slower when Handshake Mode is enabled.

Terminator

The KDC supports various termination characters when the Data Format mode is set to Barcode only. Select <NONE>, <CR>, <LF>, <CR+LF>, or <TAB> as the termination character. The default terminator is <CR+LF>. The Up/Down/Left/Right arrow terminator is also available for HID mode.

Chk Duplicate

This option prevents you from collecting duplicate data.

Enter Key(KDC350/500 only)

This option determines the behavior of the '#' key on the keypad.

- If this option is enabled, the '#' key acts as a keyboard enter key.
 - The '#' key finishes the current data input, and stores/sends input data according to the menu settings of **Wedge/Store**.
 - The cursor moves to next line after the current data input is complete, regardless of whether there is a data input or not.
 - The screen is scrolled up one line if the '#' key is pressed on the last line of KDC screen.
 - If 'Shift' is enabled, remember that the '#' key will input the '#' character.

Extend Key(KDC350/500 only)

This option enables users to enter more symbols by using keypad.

Age Verification(KDC30/270C/300/350C/420/421/425/450/470C)

This option enables to verify age by reading driver license.

BT Config Menu – KDC20/30/200/250/270/300/350/400/470/500

The KDC supports *Bluetooth* Ver2.1+EDR. Before utilizing the advantages of Bluetooth functionality with the KDC, the user should become familiar with Bluetooth connectivity and its impact on the host environment.

To configure your KDC for Bluetooth functionality, you may use the KDC Menus.

Below is a listing of the Bluetooth options and their settings. The default settings for these options have been set to increase the usability of Bluetooth technology without compromising the KDC battery usage.

IMPORTANT: We strongly recommend NOT changing these settings until the user has fully tested the Bluetooth connection between the KDC and the host device.

For more detailed information regarding Bluetooth functionality with the KDC, please refer to [Chapter 4. BLUETOOTH.](#)

ConnectDevice

You may choose the Bluetooth device type in this option.

- HID normal - KDC20(i)/30(i)/200(i)/250(i)/270(i)/300(i)/350(i)/400(i)/470(i)
- HID iOS - KDC20(i)/30(i)/200(i)/250(i)/270(i)/300(i)/350(i)/400(i)/470(i)
- SPP2.0 - KDC20(i)/30(i)/200(i)/250(i)/270(i)/300(i)/350(i)/400(i)/470(i)
- SPP - KDC20(i)/30(i)/200(i)/250(i)/270(i)/300(i)/350(i)/400(i)/470(i)/500(i)
- MFi - KDC20i/30i/200i/250i/270i/300i/350i/400i/470i/500i

Auto Connect

Enabled or Disabled(KDC500 doesn't support)

Auto Reconnect

Enabled or Disabled

Auto Power On

Enabled or Disabled(KDC500 doesn't support)

PWR On Time

Disabled, 1 to 10 seconds(KDC500 doesn't support)

Auto Power Off

Enabled or Disabled (KDC250G/350G should use option in system menu)
(KDC500 doesn't support)

Beep Warning

Enabled or Disabled(KDC500 doesn't support)

PWR Off Time

1 to 30 Minutes(KDC500 doesn't support)

PowerOff Msg

Enabled or Disabled(KDC500 doesn't support)

MAC Address

When users select this option, KDC displays 12 characters *Bluetooth* MAC Address.

FW Version

This option displays *Bluetooth* Firmware Version

Wakeup Nulls

Enabled or Disabled(KDC500 doesn't support)

BT Toggle

Enable or Disable iOS device soft keyboard or Connect/Disconnect Bluetooth. (KDC500 doesn't support)

BT Disconnect Button

Enable or Disable Bluetooth disconnection by pressing down button for 3 seconds. (KDC500 doesn't support)

HID AutoLock

Disabled, 1, 2, 3, 4, 5, 10, 15 minutes(KDC500 doesn't support)

HID Keyboard

Users may select a keyboard language in HID mode. KDC supports five languages: English, German, French, Spanish, and Italian. (KDC500 doesn't support)

HID Initial Delay

In this menu, users may define the initial delay between 1 second to 10 seconds before data transmission in HID mode(KDC500 doesn't support)

HID Inter-character Delay

This option enables users to define the inter-character delay between 10msec to 100msec in HID mode(KDC500 doesn't support)

HID Control Character

This option helps users to map control characters to **ALT+Numlock or ^+Character_or '|'**. (KDC500 doesn't support)

BT Service Menu – KDC20/30/200/250/270/300/350/400/470/500

Power

Users may choose to turn Bluetooth Power on or off. Select between Enable and Disable.

Pairing Mode

This option Enables user to enter pairing mode by simply selecting this menu.

- The KDC enters into pairing mode so that the host *Bluetooth* device may search for it.
- The KDC may exit pairing mode if the user presses the SCAN button or if it fails to pair with the *Bluetooth* host device within 90 seconds.

Discovering

When users choose this menu, KDC searches for nearby *Bluetooth* devices. (KDC500 doesn't support)

Connecting To

This option enables the user to inquire to a registered *Bluetooth* device. (KDC500 doesn't support)

Disconnect

This option enables the user to disconnect KDC from the paired *Bluetooth* device. (KDC500 only)

HID Sync

KDC transmits all stored data to the host over HID profile if HID Sync option is enabled. (KDC500 doesn't support)

Auto Pairing

Enables or Disable the automatic Host Bluetooth type detection (SPP or MFi).(i Model only)

GPS Config Menu – KDC250G/350G

Barcode and GPS data format

The GPS enabled model adds the GPS coordinate after the barcode data, if GPS data is available. The GPS data starts with "<G|P/S>" and ends with ":". For example, the GPS enabled model would record barcode "1234567890" , GPS coordinate "4354.45275,N;07925.81993,W" and Altitude data "208.7,M" as "1234567890<G|P/S>4354.45275,N;07925.81993,W ,208.7,M:" in the barcode data field.

GPS Menu

- **GPS Power:** Turning GPS Power on or off
 - Users may enable or disable the GPS Power.

- The GPS module consumes extensive battery power. To conserve battery power, it is strongly recommended to turn off the GPS option when the GPS enabled model is not being used for an extended period of time.
- It is also recommended to use the GPS Auto Power Off option in the SystemConfig menu. This option automatically turns off the GPS power if a barcode is not scanned for a period of time.
- **Power Mode:** The user may choose the type power consumption for the GPS function.
 - Users may extend the battery life of the GPS enabled model in Power Save mode.
 - Users should use normal mode if accurate GPS data is required.
 - The KDC350G will last about 15 hours in normal non-bypass data mode and 18 hours in power save non-bypass data mode.
 - The KDC350G will last about 7 hours in normal bypass data mode and 8 hours in power save bypass data mode.
- **Bypass Data:** Enabled or Disabled
 - This option should be disabled if users wish to record the GPS data with a scanned barcode data.
 - The KDC will bypass GPS data to the host if the bypass option is enabled.
 - The KDC becomes a Bluetooth GPS receiver if this bypass data option is selected.
- **Acquire Test:** Select to acquire GPS signal.
- **Reset GPS:** Reset KDC GPS module.

GPS Hot Key

The KDC250G/350G provides the following hot keys for convenient GPS operations:

- **GPS Acquire Test Cancellation**
 - Users may cancel the GPS acquire test by pressing the SCAN button during the test.
- **GPS Data Append Cancellation**
 - Users may cancel GPS data append by pressing SCAN button if GPS data is not available immediately.
 - Users should hold the SCAN button for more than 3 seconds to cancel GPS data append.

USB Mode Menu– 100M/200M/250M/270/300M/350

Disabled

When this option is selected, KDC enters into USB Serial mode.

USB Disk

This option enables the user to change to USB Disk mode and barcode data that KDC scanned is stored into a file in flash disk when this option is selected.

KDC100M/200M/250M/300M/350 may be used as USB Disk with 4MB or 8MB space and KDC270 may be used as USB Disk with 8MB space.

USB HID

When this option is enabled, KDC enters into USB HID mode.

Disk Format

This option is available in USB Disk mode and Enables users to format KDC USB Disk.

Data Format

This option is available in USB Disk mode.

- Data
- Data Time
- Data Type
- Data Time Type

- Changing the “USB Mode” option will erase all data in KDC memory.
Make sure to back up your data before changing this option.
- KTSync may not recognize the KDC if the KDC is in “USB DISK” mode or “USB HID” mode.

Note

NFC Config Menu – KDC350N/411N/415N/421N/425N/500

NFC Power

- Turning NFC Power on or off
- Options: Enable/Disable

Data Format

- Options: Data only/Packet data.(KDC500 doesn't support)

UID Only

- Enable or Disable UID Only menu
- The KDC only sends UID data to the host device when the KDC is in UID Only mode.
- (KDC500 doesn't support)

UHF Config Menu – KDC450U

UHF Power

- Turning UHF Module Power On or Off
- Options: Enable/Disable

Power On Time

Specify the power on time duration of UHF module.

- Options: 500ms/1sec/1.5sec/2sec/2.5sec/3sec/3.5sec/4sec/4.5sec/5sec

Power Off Time

Specify the power off time duration of UHF module.

- Options: 500ms/1sec/1.5sec/2sec/2.5sec/3sec/3.5sec/4sec/4.5sec/5sec

Power Level

Specify the UHF module power level to determine the power strength of antenna. 7 means the most power strength.

- Options: 0/1/2/3/4/5/6/7

Data Format

Specify the data format of UHF data when it is transmitted from KDC to Host.

- Options: Binary / Hexa Decimal

Smart Hopping

It enables KDC450U to find an optimized UHF channel and can be initiated by reading a special barcode.

WIFI Config Menu (KDC350F)

KDC350F WiFi model can send and receive data to/from host by using the following protocols.

- UDP
- TCP
- HTTP_GET
- HTTP_POST

In UDP/TCP mode, KDC350F will support full duplex mode, meaning is the KDC350F will be ready to get data from host all the time.

Power

- Turns the Wi-Fi Module Power ON and OFF.

AP

- Set AP SSID.
- Set AP Passcode.

Server

- Configure the following server information
 - IP Address
 - URL Address
 - Port Number
 - Protocol (UDP/TCP/HTTP-GET/HTTP-POST)
 - SSL(Security)
 - Server Page

Connect

- Connect to AP and server.

Auto Connect

- Enable/Disable KDC to reconnect to AP & Server when it detects disconnection from AP and Server.

Send Stored

- Enable/Disable KDC to send stored data when sending a new read data.

MSR Config Menu – KDC415/425/430/500

Power(KDC500 only)

- Turning MSR(Magnetic-Stripe Card Reader) on or off
- Options: Enabled/Disabled

Data Format(KDC415/425/430 only)

- Enables/Disables whether KDC415/425/430 sends with packet data or not.
- Options: Enabled/Disabled

Use Track

The user may select which track(1/2/3) data to read from the MS Card.

- Track 1 : Enabled/Disabled
- Track 2 : Enabled/Disabled
- Track 3 : Enabled/Disabled

Null Check(KDC500 only)

The user may select which track(1/2/3) data should not be null. When this option is enabled for a Track and the read data is null, MS Card read fail occurs.

- Track 1 : Enabled/Disabled
- Track 2 : Enabled/Disabled
- Track 3 : Enabled/Disabled

Beep On Error

When this option is enabled, KDC makes a beep sound when it fails to read a MS card.

Encrypt MSR Data(KDC415/425/430 only)

- If enabled, KDC415/425/430 sends MSR data with AES encrypted.
- Options: Enabled/Disabled

AES Key length(KDC415/425/430 only)

- Specify the AES key length.
- Options: 128bits/192bits/256bits

Card Type

The user may select which type of MS card to read.

- ISO
- OTHER 1
- AAMVA
- JIS(KDC500 only)

Track Separator(KDC415/425/430 only)

- Specify the separator which will be added between track data
- Options: None, Space, Comma, Semicolon, CR, LF, CR&LF, Tab

Attach SS/ES

When this option is enabled, KDC does not exclude the Start Sentinel(SS) and End Sentinel(ES) control characters in the track data when it sends the card data to the connected Host device.

Partial Data(KDC415/425/430 only)

Enables the user to transfer partial MSR data. The user defines the start position and number of characters to be transferred.

- Start position
 - ◆ This option specifies the start position of data.
- No of char(s)
 - ◆ This option specifies the length of data. The '0' means all data.
- Action
 - ◆ This option selects if erasing or taking the specified data.

ICCR Config Menu – KDC500

Power

- Turning ICCR(IC Card Reader) on or off
- Options: Enable/Disable

IFD Number

This option shows the EMV IFD(Interface Device) number.

Config Number

The option shows the stored EMV Contact Configuration number.

SystemConfig Menu

Memory Size (3.0+ version only, KDC500 doesn't support)

The user may select how much memory to divide between normal data memory and application database memory.

- The KDC will erase all stored data upon changing the partition size.
- The user should enter the following key sequence to change the partition.
 - UP button + UP button + DOWN button + DOWN button + SCAN button

Memory Status

In this option, users may checks the number of stored barcodes and memory usage.

Reset Memory

In this option, users may reset KDC memory by erasing all stored barcodes, applications, and BT registry. KDC500 only erase all stored barcodes.

Auto Erase

If enabled, this feature erases stored barcodes on the KDC once the 'Buffer Full' condition is reached.

Sleep Timeout

This option Enables users to set the amount of time the KDC waits before going to *sleep* (when not being used).

Auto Power Off (KDC250G/350G)

- **Bluetooth:** Enabled/Disabled
- **GPS:** Enabled/Disabled
- **Power Off Time:** 0(Never), 5, 10, 20, 30, 60, 120 minutes

Date/Time

In this option, users may set the date and time of the KDC, which may also be set using KTSync.(except KDC500)

Battery

This option shows the current status of battery power level.

Version

This option shows the KDC firmware version and serial number.

KDC500 displays only firmware version.

Serial Number(KDC500 only)

KDC500 displays the serial number

Button Lock

This option enables the user to lock or unlock the KDC scan and scroll buttons.(KDC500 doesn't support)

Beep Alert

- **Beep Sound:** Enables or disables KDC beep sound.
- **Power On Beep:** Enables or disables beep sound when KDC power is on.
- **Beep On Connect:** Enables or disables beep sound when KDC is connected to the host.
- **Beep On Scan:** Enables or disables beep sound when KDC is scanning.
- **Beep On MS Card (KDC500 only) :** Enables or disables beep sound when KDC reads a MS Card.
- **Beep On IC Card (KDC500 only) :** Enables or disables beep sound when KDC reads an EMV Contact Card.
- **Beep On NFC Card (KDC500 only) :** Enables or disables beep sound when KDC reads an NFC Tag or EMV Contactless Card.

Beep Volume

This option enables the user to adjust the beep volume from High to Low.

MF Mode (KDC20i/30i/200i/250i/270i/300i/350i/400i/470i)

This option Enables user to enable or disable MFi mode. MFi mode supports SPP and MFi Bluetooth profiles. Non-MFi mode supports SPP, SPP2.0, HID iOS and HID normal.

Vibrator(KDC20/30/270/350)

Enables, disables and configure KDC vibrator.

- There are two additional options for KDC vibrator configuration.
 - Scan Success ➔ Specify the number of vibration when scan successfully.
 - Scan Failure ➔ Specify the number of vibration when scan failed.

Auto Exit

This option enables KDC to automatically exit KDC Menus.

Port Status

This option enables users to enable or disable KDC port messages.

Display Format

There are various selections of display format; Time & Battery, Type & Time, Type & Battery, Memory Status, Barcode only and Graphics.

The Graphics option enables to display 'O' for scan success and 'X' for scan failure.

Menu Barcode

This option enables users to enable or disable Honeywell special barcodes (KDC300/350C/500C only).

Scrolling

This option enables users to enable or disable display scrolling for a barcode with more than 40 characters.(KDC500 doesn't support)

Brightness

This option enables users to adjust brightness of display.

Keypad(KDC350/500)

This option enables users to enter data by using keypad.

Language(Version 3.0+, KDC500)

This option enables users to select KDC display languages.

The supported languages are as following.

- None – Languages is not supported. Default is an English.
- US(English)
- French
- Italian

- Spanish
- Korean
- Japanese

KDC500 only supports US(English), Korean and Japanese.

Factory Default

By selecting this option, users may reset KDC options to factory default settings.

Key Mgmt Menu– KDC500

- **Stored Keys** : Displays all the encryption keys stored in the KDC500.
- **Inject Keys** : In this menu, the user can inject the necessary encryption keys via Key Loader device.

Sensitive Menu – KDC500

KDC500 Sensitive menu has sub menus which can impact on the KDC500 security services. KDC500 requires two passwords for the Sensitive menu group access in order to ensure only authorized people can utilize the sensitive services. The default passwords are 0000000 and 1111111.

Note

- For PCI PTS compliance, the default passwords should be changed prior to use. Without the default passwords change, KDC500 declines all the payment related service requests; such as MS Card Read, IC Card Insertion, PIN Entry, etc.

Set Date/Time

In this menu, the user can set the date and time of the KDC500.

Set Self-Test

The user can set the time for the Self-Test in this menu. In PCI PTS, it requires to perform the Self-Test(Firmware and stored key authentication) at least once in 24 hours.

Set Passwords

In this menu, the user can change the current passwords to access the Sensitive Menu.

Key Mgmt

- **Stored Keys** : Displays all the encryption keys stored in the KDC500.
- **Inject Keys** : In this menu, the user can inject the necessary encryption keys via Key Loader device.

- **Clear Keys** : In this menu, the user can clear all the encryption keys stored in the KDC500 except the Firmware Update Authentication key which is loaded during the manufacturing process.

Card Encrypt

This menu allows user to choose the encryption algorithm for the sensitive card data from the list below.

- Plaintext
- T-DES
- AES

3.4 LED Status

LED Color	Status
Green	<ul style="list-style-type: none">• Successful Reading• USB is connected and battery is fully charged.• MFi mode in pairing mode.
Orange	<ul style="list-style-type: none">• Low battery• USB is connected and battery is charging• HID mode is in pairing mode. (except KDC500)
Red	<ul style="list-style-type: none">• No reading• SPP mode is in pairing mode.

Table 5 - Explanation of LEDs

3.5 Empty Battery

KDC100/200/250/270/300/350

The KDC will display the message *Empty Battery Connect USB* when the battery is empty.

Please charge the KDC IMMEDIATELY to prevent any interruptions while it is collecting data.

KDC20/30/400/470

- Under 30% - Orange LED flickers at 1-second-intervals for 5 seconds every minute.
- Under 20% - Orange LED flickers at 1-second-intervals for 10 seconds every minute.
- Under 10% - Red LED flickers in 1- second-interval for 10 seconds every minute, and the user will hear a beeping sound.

KDC500

- Under 10% (Low) Displays the message *Low Battery Please Charge*. KDC500 is still functional, but charge the KDC500 IMMEDIATELY to prevent any interruptions while it is collecting data.
- Under 5% (Empty) - Displays the message *Empty Battery Please Charge*. KDC500 is not functional any longer.

3.6 Buffer Full

The KDC will display the message ***Buffer Full*** when there is no more space in the flash memory or the number of collected barcodes reaches the maximum number of stored barcode. To prevent the loss of data, you should synchronize the data then reset the memory when this message is displayed.

The 4MB/8MB version KDC reaches the Buffer Full condition in the following situations:

- 0.5MB Partition - Collected data size reaches 0.5MB or collected number is 25,600
- 1MB Partition - Collected data size reaches 1MB or collected number is 51,200
- 2MB Partition - Collected data size reaches 2MB or collected number is 102,400
- 3MB Partition - Collected data size reaches 3MB or collected number is 153,600
- 4MB Partition - Collected data size reaches 4MB or collected number is 204,800
- 5MB Partition - Collected data size reaches 5MB or collected number is 256,000
- 6MB Partition - Collected data size reaches 6MB or collected number is 307,200
- 7MB Partition - Collected data size reaches 7MB or collected number is 358,400
- 8MB Partition - Collected data size reaches 8MB or collected number is 409,600

3.7 Reset Feature (100/200/250/300) or Power-on/off (KDC20/30/270/350/400/470/500)

The Reset feature enables the user to restart the KDC100/200/250/300 if necessary, without losing any stored barcode data or option settings. To reset the KDC, follow the below steps.

1. Press the DOWN and SCAN buttons simultaneously for 5 seconds.
2. When the LEDs illuminate orange, release the buttons.
3. The KDC initial screen, **KoamTac Data Collector KDC**, displays when reset is complete.

Note

The KDC stores collected data into flash memory and will not lose data nor the KDC settings during the reset process.

If you are using the KDC20/30/270/350/470, you may turn the power on and off by pressing the DOWN and SCAN button simultaneously for 5 seconds. When the LED light is green, you may release the buttons and the power will be on. When you turn off the KDC20/30/270/350/470, you will hear a beep sound after pressing the DOWN and SCAN buttons simultaneously.


If you are using the KDC400 (except KDC470) you may turn the power on and off by sliding the power switch.

If you are using the KDC500, you can turn the power on and off by pressing the left and right SCAN buttons simultaneously for 5 seconds. When the display shows KOAMTAC logo, you may release the buttons and the power will be on. When you turn off the KDC500, you will see the display shows blank after pressing the left and right SCAN buttons simultaneously.

3.8 Replace Battery


Each KDC comes with a rechargeable, Lithium-polymer (KDC20/100/200) or Lithium-ion (KDC30/250/270/300/350/400/470/500) battery. The battery may be recharged from any USB port or KDC charging cradle, and may be recharged about 300 times before it needs to be replaced. KOAMTAC recommends replacing the battery annually, as a declining battery will cause noticeable performance degradation in the KDC. Replacement batteries may be purchased from a KDC reseller. Batteries should be disposed of properly as according to the WEEE regulation. The steps for replacing a battery are as follows.

1. Disassemble the KDC back cover by unscrewing the middle screw.
2. Remove the old battery and replace with a new battery.
3. Reassemble the back cover.

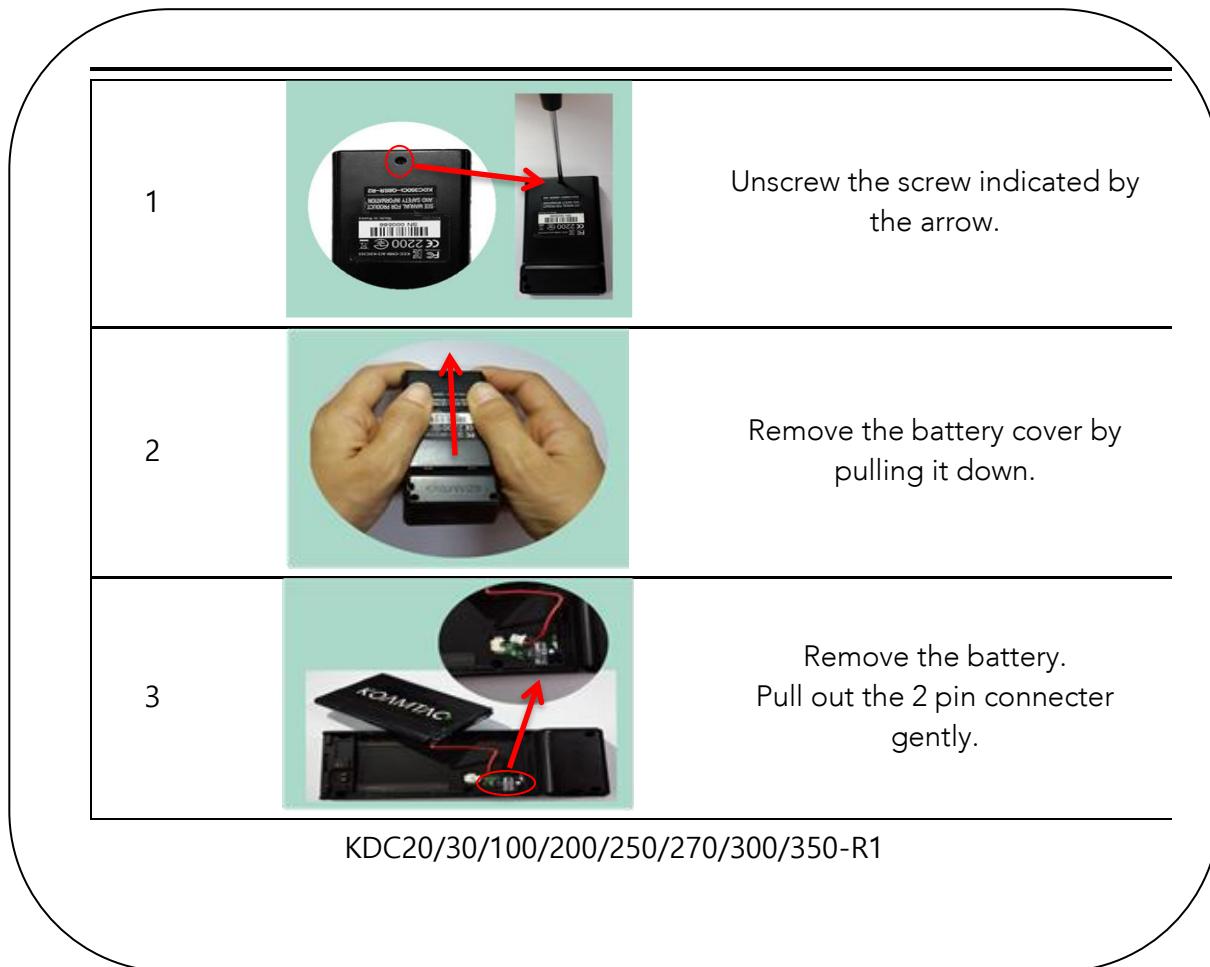

- 1


- 2

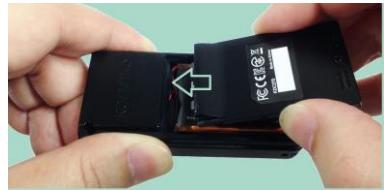
- 3


- 4


- 5



To insert the battery cover for KDC270

1



Unscrew the screw indicated by
the arrow.

2




Remove the battery cover by
pulling it up gently.

3



Remove the battery.
Pull out the 2 pin connector
gently.

KDC400 Series

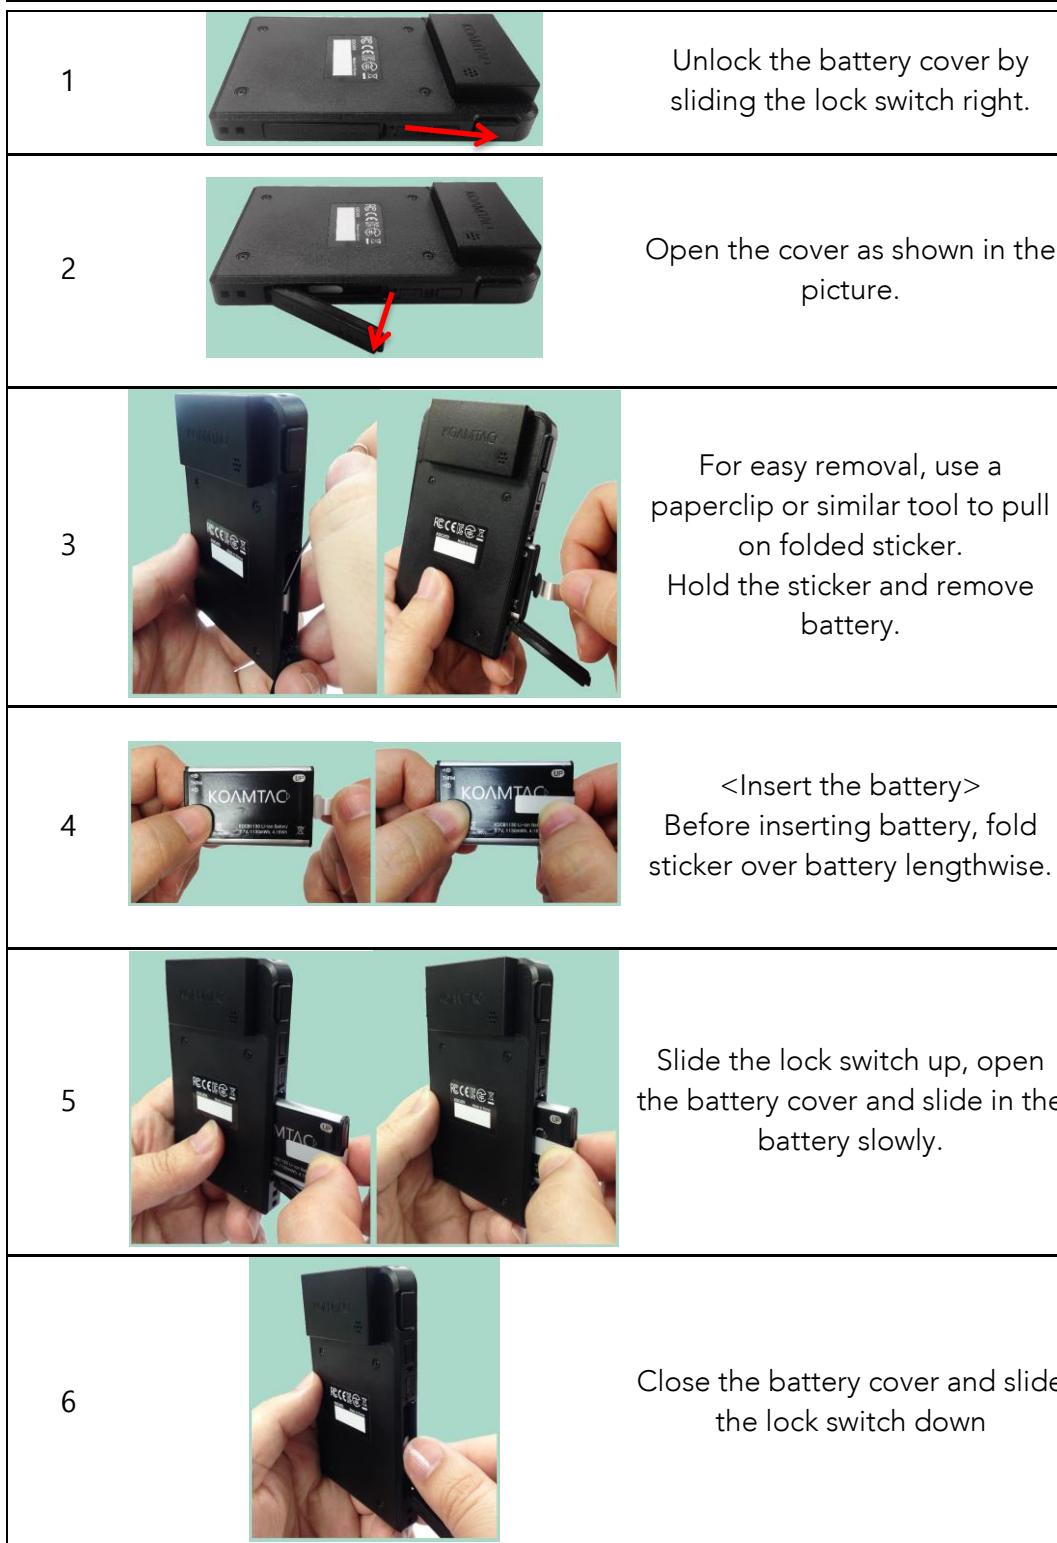

KDC470
Figure 15 - Replacing a Battery

4. Bluetooth - KDC20/30/200/250/270/300/350/400/470/500

The KDC20/30/200/250/270/300/350/400/470 supports HID (Human Interface Device) normal, HID iOS, SPP (Serial Port Profile) and SPP2.0 profiles. The KDC500 supports SPP only. The KDC20i/30i/200i/250i/270i/300i/350i/400i/470i/500i supports MFi (Made for iPhone/iPad/iPod touch) profiles too. They are compatible with the following Bluetooth stacks:

- BlueSoleil
- Broadcom (Widcomm)
- Microsoft Windows XP, Vista, 7, 8, 10, and Mobile 5.0+
- Toshiba

Note

For PCI PTS compliance, KDC500 can support only SPP and MFi profiles.

The KDC200/250/270/300/350/500's *Bluetooth* options may be configured by using the KDC menu, PC KTSync and special barcodes. The KDC20/30/400/470's Bluetooth options may be configured by using the PC KTSync and special barcodes.

4.1 Bluetooth Config

Connect Device

The KDC supports both Serial Port Profile (SPP) and Human Interface Device Profile (HID). The user may choose amongst SPP2.0, SPP (2.1), HID normal, or HID iOS profiles to communicate with the host device. An additional MFi (Made for iPhone/iPad/iPod touch) option is available for KDC20i/30i/200i/250i/270i/300i/350i/400i/470i/500i models when MFi mode is enabled.(SystemConfig Menu). KDC500i doesn't have MFi mode option and supports MFi by default.

If the **BT Toggle** option(KDC500 doesn't support) in **BT Config** is enabled, the user may connect and disconnect the Bluetooth connection with the host device by pressing the UP and DOWN buttons. It normally takes 3 seconds to connect and 1 second to disconnect. This is a very useful feature for iPhone and iPad applications.

The user may also enable and disable the iPhone and iPad soft keyboard instantly by using this BT Toggle option in HID mode.

The UP button shows the Bluetooth connection status and the DOWN button shows the time when this option is disabled.

Note

The user should first un-pair the KDC from the Bluetooth host to change the Connect Device setting on the scanner to a different Bluetooth profile.

Auto Connect

This feature enables the KDC to automatically connect to the host device when the KDC is powered on. KDC500 doesn't support Auto Connect.

IMPORTANT: Until the host device and the KDC have been fully tested, it is strongly recommended that this feature be set to 'Disabled', because a host device that does not support this feature could cause problems, such as power loss or upload delays.

Note

The KDC automatically tries to connect to the host 10 times within the duration of two minutes when *Bluetooth* power is ON, *Bluetooth* is disconnected, Auto Connect is enabled, and system Sleep Timeout is set to 5 seconds.

Auto Reconnect

This feature enables the KDC to automatically connect to the host device when the KDC is disconnected from a host.

Note

The KDC tries to connect automatically to the host 10 times within the duration of two minutes if Bluetooth is disconnected.

Auto Power On

The Auto Power On option Enables the KDC to automatically power on Bluetooth when the SCAN button is pressed. The default setting is Disabled. KDC500 doesn't support this option.

Note

Users should press the scan button for the duration defined in the **BT Config** Power-on time option. The host program may have to open the COM port again in order to be reconnected with the KDC.

PWR ON Time

The PWR On Time option works in conjunction with the Auto Power On option. The default value is Disabled. If the KDC Bluetooth power is off, you may turn on the Bluetooth power by pressing the SCAN button for the PWR On Time option value. KDC500 doesn't support this option.

Auto Power Off

The Auto Power Off option works in conjunction with the PWR Off Time option. This option Enables the KDC to power off Bluetooth automatically when the KDC is NOT CONNECTED to the host for the time duration specified in the PWR Off Time option. KDC500 doesn't support this option.

The default for this option is disabled. It is strongly recommended to keep it enabled to maximize the operation time of the KDC. If Auto Power Off is Enabled, Bluetooth may be manually powered off before the specified time in the PWR off time option.

It is recommended to enable 'Auto Power On' option if this option is enabled. User doesn't need to turn on the Bluetooth power manually with this configuration.

Beep Warning

The KDC beeps to warn user to power off the Bluetooth if this option is enabled with five short beeps when the following condition meets..

1. Bluetooth power is ON
2. KDC is disconnected
3. Auto Power Off is DISABLED

KDC500 doesn't support this option.

PWR OFF Time

The PWR Off Time option works in conjunction with the Auto Power Off option. If Auto Power Off is Enabled, the KDC powers off Bluetooth when the duration of time specified in the PWR Off Time option is met and the KDC is NOT CONNECTED to the host. The time setting for this option is from one (1) minute to 30 minutes. The default is five (5) minutes. KDC500 doesn't support this option.

PowerOFF Msg

The KDC sends a Bluetooth power off message "BTOFF" to the host when KDC is connected from host if this option is enabled. KDC500 doesn't support this option.

MAC Address

The user may verify the KDC Bluetooth MAC Address.

FW Version

The user may verify the KDC Bluetooth firmware version in this menu.

Wakeup Nulls

The KDC sends three leading Null bytes to wake up the *Bluetooth* connected device. This feature may be disabled if the *Bluetooth* connected device does not require additional bytes to wake up. KDC500 doesn't support this option.

Autolock Time

The iPhone/iPad/iPod touch loses incoming Bluetooth data while in sleep mode. To prevent data loss, you may set the KDC Autolock time to the same Autolock time of your iPhone/iPad/iPod touch, to use the automatic wakeup feature in HID mode. KDC500 doesn't support this option.

If the Autolock time is set to more than one minute and the barcode scan interval is larger than the auto-lock time, there will be a one second delay of barcode transmission. The auto-lock time would be set as 0, 1, 2, 3, 4, 5, 10, 15 minutes. 0 means the iPhone/iPad/iPod touch never enters sleep mode. This option may not need from iOS 5.x.

HID Keyboard

The user may select an international keyboard – English, German, French, Spanish, or Italian. It is also required to set the host keyboard with the same keyboard as selected in this menu. KDC500 doesn't support this option.

HID Initial and Inter-Character Delay

Certain applications may not process HID input fast enough and may lose some characters during transmission. Users should increase initial and inter-character delay to prevent data loss during HID transmission. KDC500 doesn't support this option.

- HID Initial Delay: Defines the initial delay between 1 sec to 10 sec before data transmission in HID mode.
- HID Inter-character Delay: Defines the inter-character delay between 10msec to 100msec in HID mode.

Control Character Transmission in HID mode

Control characters between ASCII values 0x00 and 0x1F may be replaced by the ALT+Numpad or ^+Character or replaced with '|'. KDC500 doesn't support this option.

- Disabled → Transmit the original control character.
- Alt+Numpad → Transmit Alt+ ASCII value from Numpad.
- ^+Character → Control characters would be substituted as shown in the following table.
- Replacement to | → Control characters would be substituted as "|".

Control Char	Transmit Chars						
0x01	^A	0x0B	^K	0x14	^T	0x1D	^]
0x02	^B	0x0C	^L	0x15	^U	0x1E	^^
0x03	^C	0x0E	^N	0x16	^V	0x1F	^_
0x04	^D	0x0F	^O	0x17	^W		
0x05	^E	0x10	^P	0x18	^X		
0x06	^F	0x11	^Q	0x19	^Y		
0x07	^G	0x12	^R	0x1A	^Z		
0x09	^I	0x13	^S	0x1C	^\\		

Function Key Transmission in HID mode

The user may send F1 to F12 function keys by scanning special barcodes in HID mode. KDC500 doesn't support this option.

Disconnect/Reconnect/BT(HID) Toggle

The user may disconnect or reconnect the Bluetooth connection, and toggle the soft keyboard using side buttons. KDC500 doesn't support this option.

Bluetooth Note e	UP Key	DOWN Key (DisconnectBTN disabled)	DOWN Key (DisconnectBTN enabled)
		Does nothing	Releases BT connection
SPP	Reconnect	Does nothing	Releases BT connection
HID iOS	Reconnect	Soft Keyboard Toggle if pressing less than 3sec	Soft Keyboard Toggle if pressing less than 3sec, Releases BT connection
MFi	Reconnect	Does nothing	Releases BT connection
SPP 2.0	Reconnect	Does nothing	Releases BT connection
HID normal	Reconnect	Does nothing	Releases BT connection

Some SPP host doesn't support Reconnection from KDC.

4.2 Bluetooth Service

Power

The POWER option enables the user to Enable or Disable the Bluetooth functionality of the KDC. To use Bluetooth, this option must be set to enable.

However, like all devices enabled for Bluetooth, the KDC will constantly search to connect with a Bluetooth host when set to enable. Constant searching for Bluetooth devices increases power consumption.

Unless you are using Bluetooth with your KDC, this option should be set to disable.

IMPORTANT: To prevent unnecessary power problems, it is strongly recommended that the POWER option be set to disable if the KDC is idle for an extended period of time.

Pairing

Before you are able to use Bluetooth, the KDC must be paired with the host device. This pairing process needs to be completed only once with each host device. After pairing, the host device will always recognize the KDC as a Bluetooth device, unless the Bluetooth configuration is modified. If it is modified, you may need to pair the devices again.

IMPORTANT: The host device must be configured for Bluetooth before it may be paired to the KDC.

Note

KDC with Bluetooth Spec2.1+EDR does not prompt Pin code entry menu.

To pair the KDC20/30/200/250/270/300/350/400/470 with the host, follow these instructions:

1. Select Pairing from the Bluetooth menu. The message “**Pairing started...**” will be displayed.
2. The “**Pairing Done**” message will display when the Bluetooth connection is successfully established. The connection must be established before the pairing timeout of 90 seconds.
 - If “**Pairing failed...**” message displays, the Bluetooth connection with the host device failed. If the message “**Connected**” displays, a Bluetooth connection is established.
 - It is possible for the message “**Pairing failed...**” to display on the KDC while the host device displays the “**Connected**” message. If this occurs, a Bluetooth connection has been established.

For KDC500 paring with the host, Numeric Comparisons pairing method is required for PCI PTS compilcance. See the section [2.1 Bluetooth Paring](#) for the details.

Discovering

KDC200/250/270/300/350 starts to search for neighboring *Bluetooth* devices if the Discovering menu is executed. It will take about 30 seconds to finish searching and to list available neighboring *Bluetooth* devices. Another option is to enter the corresponding Bluetooth MAC address in the KTSync Bluetooth menu, instead of waiting for the KDC to search for neighborhood *Bluetooth* devices. KDC20/30/400/470 only supports via KTSync configuration. KDC500 doesn't support this feature.

Connect To

This option lets you easily connect the KDC to *Bluetooth* devices that have been either previously registered in KTSync under the File Menu or discovered/connected from the KDC *Bluetooth* Service menu. KDC20/30/400/470 only supports via KTSync configuration. KDC500 doesn't support this feature.

Note

There could be an interoperability issue depending on the corresponding device Bluetooth stack. The master Bluetooth device may request that you to follow the master Bluetooth device's security procedures, if the KDC tries to connect to the master Bluetooth device.

HID Sync

The user may synchronize stored barcode data over HID using the HID Sync option. The KDC will start to transmit all stored barcode data upon execution of the HID Sync option. KDC500 doesn't support this feature.

Tips

Pair and connect KDC20i/30i/200i/250i/270i/300i/350i/400i/470i and iOS4.0+ in HID iOS mode

Note

- Users have to disable the MFi option in System > MFi menu and change the Bluetooth profile to HID-iOS to use HID Bluetooth profiles.
- Users have to RESET the iPhone/iPad/iPod touch in order to change HID to MFi mode, and vice versa, after removing a previous KDC connection.
- KDC with Bluetooth Spec2.1+EDR does not prompt Pin code entry menu.
- KDC with Bluetooth Spec. 2.1+EDR stack does not require 4 or 6 digits PIN digits entry

Follow the below steps in order to pair and connect KDC models for MFi and iOS4.0+ in HID

mode.

1. Go to the MFi menu of KDC SystemConfig Menu
2. Change MFi option to Disabled
3. Change ConnectDevice to HID iOS mode
4. Remove previous KDC connection and RESET the device
5. Change KDC to Pairing mode
6. The iPhone/iPad/iPod touch will find a new device as *Keyboard*
7. Click *Keyboard* device

iOS Soft Keyboard Toggling using BT Toggle Option.

Users need to select the option to use this feature in **BT Config>BT Toggle**. Press the DOWN button to toggle a soft keyboard.

Auto Pairing

For SPP and MFi mode, user used to select host profile before pairing. However, user doesn't need to select host device profile if this option is enabled. KDC automatically detects if host device is a SPP or MFi mode. This option is supported from KDC Bluetooth firmware version 2.2.O.

5. Synchronization

When barcode data is collected, it must be uploaded to your application. KTSync, which is bundled with the KDC, is a software that enables barcode data to be uploaded to any PC, PDA, or smartphone running Android 2.1+, Apple iOS3.1.3+, Blackberry, Mac and Windows XP/Vista/7/8/10/Mobile 5.0+. It has three major functions. (Windows XP/Vista/7/8/10 version supports all of the following features. Tablet, PDA and Smartphone versions support only limited features of PC KTSync.)

- **Synchronization** - Provides data upload functionality to your applications.
- **Keyboard Emulator** - Enables scanned data to be uploaded directly into your application as if the data were being entered manually with a keyboard.
- **Application Generation** - Enables users to create custom applications or download predefined applications such as Master-Slave, Pick/Bin, DB Lookup and Inventory.

Additional functions include:

- Prefix and Suffix add-ons to eliminate manual data entry.
- Symbology and Scan Option selections.
- Barcode Wedging options.
- KDC Menu configurations.

5.1 KTSync Menu

KTSync was installed on your PC during the initial installation process. Before data may be uploaded to any host device, KTSync must be launched on the host and configured to recognize the KDC. The following screen displays when KTSync is launched:

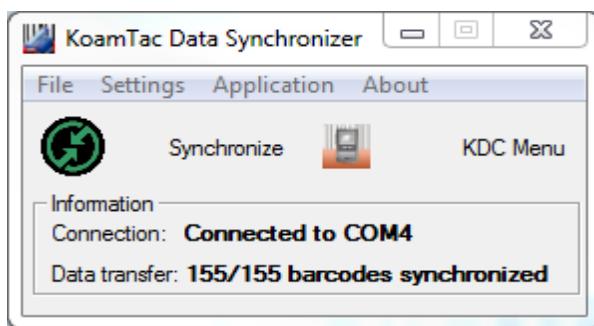


Figure 16 - KTSync® Synchronizer Initial Screen

File Menu

- Connect: This option displays the Serial port (COM#) assigned to KDC. You may also use this option to manually assign the Serial port. The Serial port assigned to KDC may be found under Windows Device Manager. The port assignment is used by KTSync for synchronizing data from the KDC to the host.
- Synchronize: This option manually tells the KDC to synchronize data with the host. While data is being synchronized, KTSync menu options are unavailable

Note

Please do not use your computer during data synchronization.

- Bluetooth: This option is not available on KDC100/KDC500. Users may register a MAC address to be directly connected by KDC20/30/200/250/270/300/350/400/470.
- Configuration: This option Enables users to set different KDCs with same settings by exporting and importing settings from one KDC to the other.
- Exit: This option ends the KTSync program. You must re-run KTSync before you may synchronize data on the KDC.

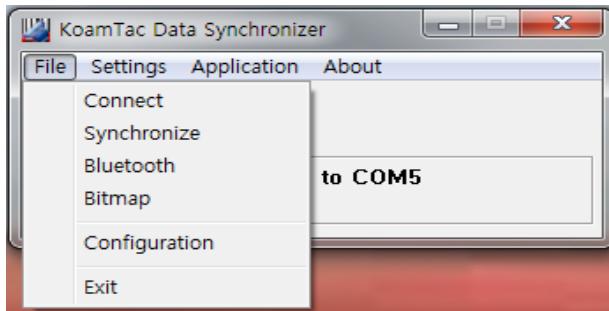


Figure 17 - File Menu

Settings Menu

- Synchronization: Select Synchronize options.
- Barcode & KDC: Select Barcode and KDC options.
- Others: Select Auto Connection and/or Synchronization Confirmation options.

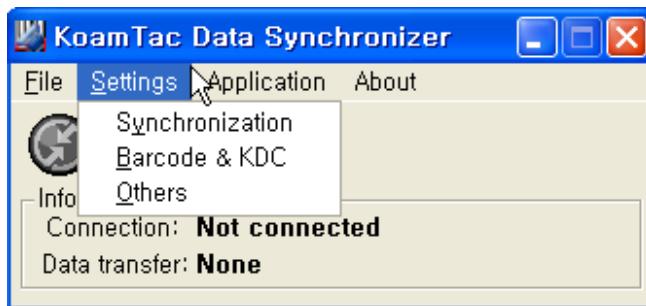


Figure 18 – Setting Menu

Application Menu(KDC500 doesn't support Application)

- Generation: Create user application or download predefined application.
- DB Lookup: Enables users to download DB into KDC and display barcode description field.
- Master/Slave: The user defines a master barcode for comparison with one or more slave barcodes.
- Pick/BIN: The user defines Pick ID and the barcode symbology for comparison with a defined Bin.
- Inventory: Users may count inventories. Inventory description will be displayed if inventory DB is downloaded into the KDC.

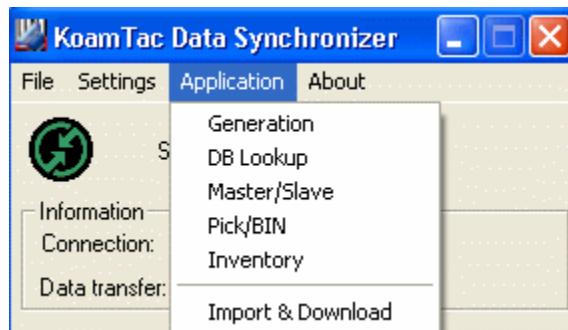


Figure 19 - Application Menu

About Menu - KTSync - Version Information

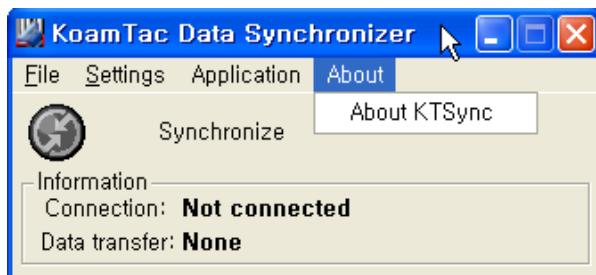


Figure 20 - About Menu

5.2 File Menu

Connect to KDC

The KDC automatically connects to a COM port when connected to the PC's USB port. If needed, the user may manually assign the KDC COM port by using the KTSync Connection submenu under the File menu.



Figure 21 - COM Port Selection for KDC

- The COM port assignment is found in the Windows Device Manager.
- KTSync will not connect to the KDC if it is in the KDC Menus. You must EXIT from the KDC Menus.
- If KTSync fails to connect automatically to the KDC, please follow these steps:
 1. Exit KTSync.
 2. Check to make sure that you have connected the KDC to a USB port on your PC.
 3. Make sure that the user is using the cable provided with the KDC.
 4. Check to make sure that the KDC is not in KDC Mode Menu.
 5. Restart KTSync.

Note

You may manually assign the COM port using KTSync Connect option under the File menu.

Synchronize

Located under the File Menu, this option enables the user to manually synchronize data on KDC with the host. This option is similar to clicking on the Synchronize button in the KoamTac Data Synchronizer box.

Erase KDC Memory

Erase all stored data in the KDC internal memory.

Bluetooth

This menu option enables the user to register up to ten Bluetooth devices, including their MAC address, PIN #, and optional prefixes or suffixes. This option enables direct Bluetooth connection between KDC and other Bluetooth devices, such as a *Bluetooth* printer. The user should choose a *Bluetooth* device to be connected in "Connect to" menu in KDC *Bluetooth* Service menu.(KDC500 doesn't support this feature)


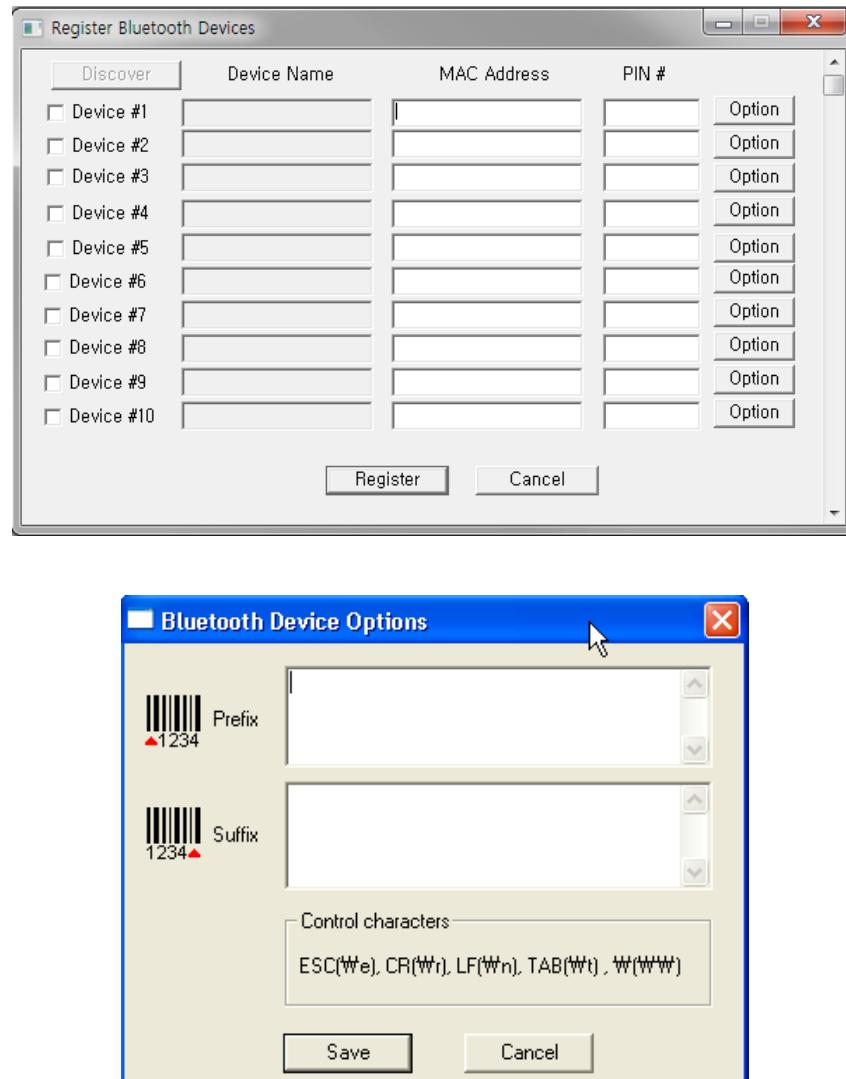


Figure 22 - Bluetooth Device Registry


Configuration

This menu is useful for the users who need to configure different KDCs with same settings. In this menu, you may export settings from a KDC to your computer and import it to other KDCs.

When you select **Configuration** in File menu, you will need to choose either **Export** or **Import**. First, select Export. You name the settings file, press **Open**, and it is exported to your computer. Second, connect a different KDC to your computer and import the settings file to the KDC by selecting **Import** in the Configuration menu. Once configuration has been finished, KDC will restart.

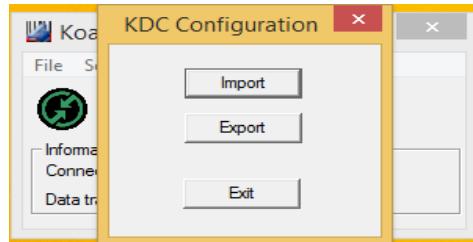

- Export

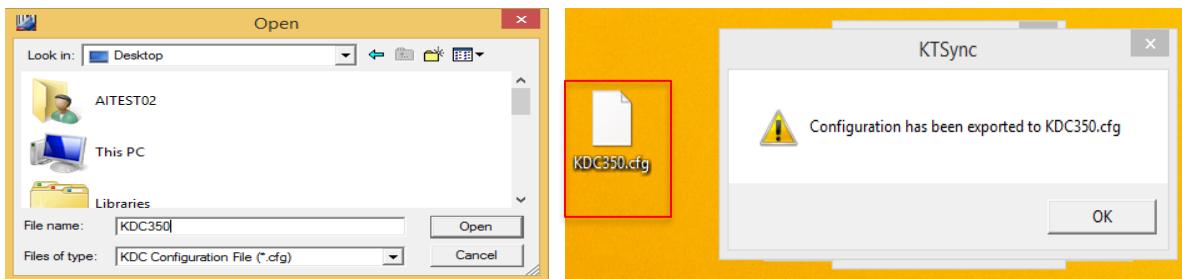

- Import

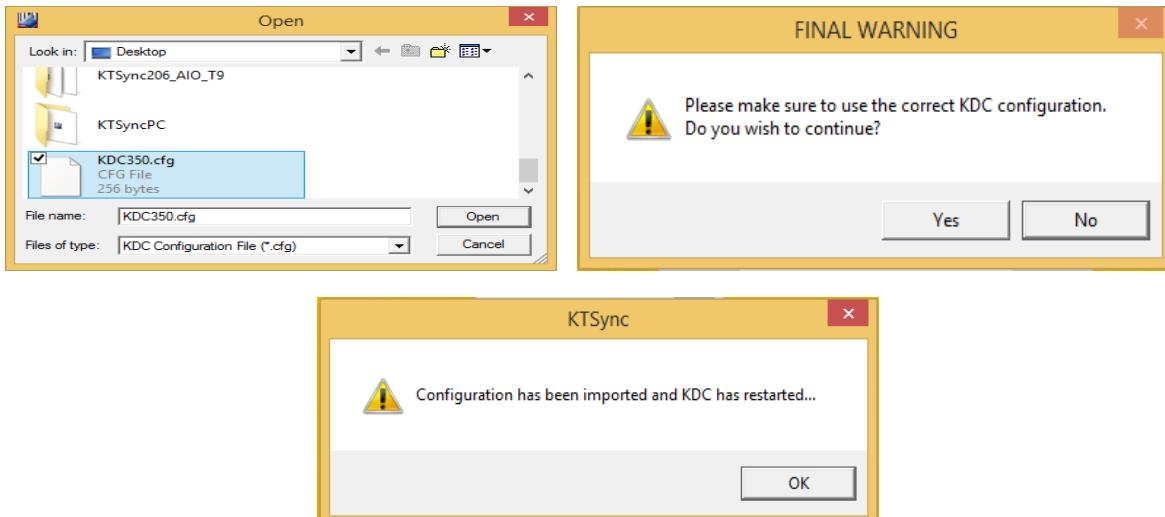


Figure 23 – Configuration

Synchronization Settings

KTSync provides several synchronization options for synchronizing data from your KDC to host devices.

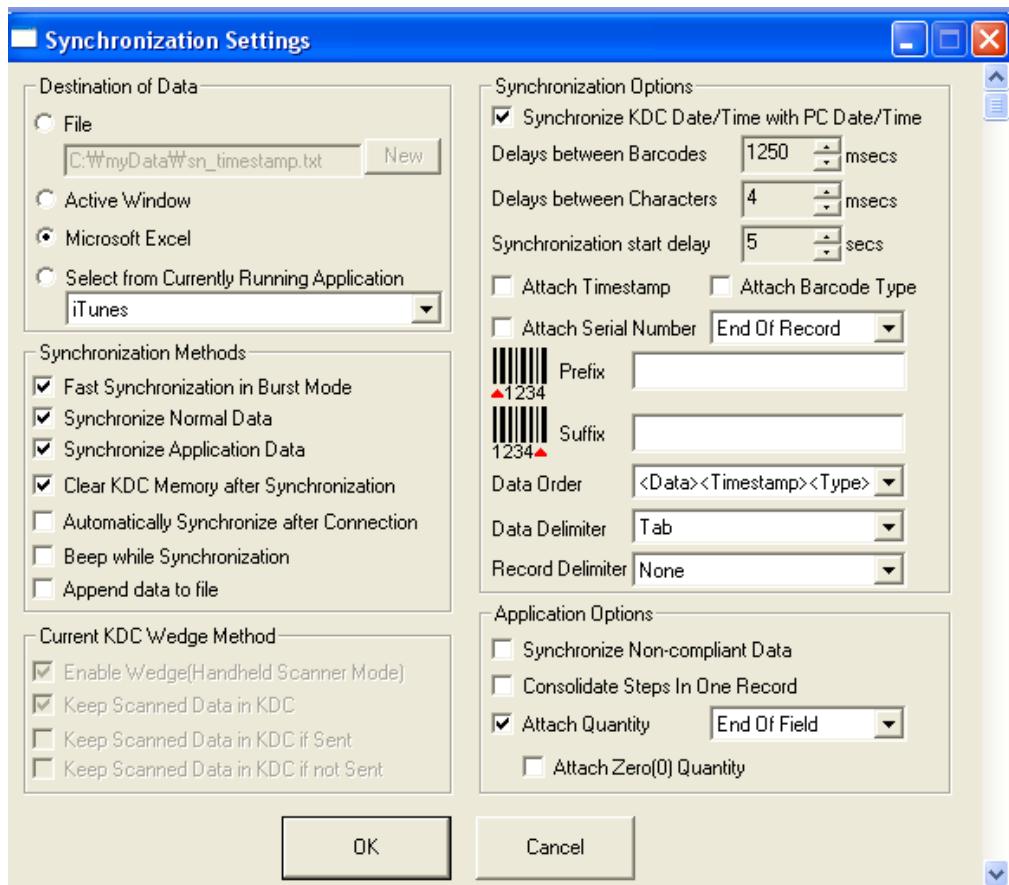


Figure 24 - KTSync Synchronization Settings

Destination of Data

When barcode data is uploaded to the host device, you must assign a destination for the data. Destination of Data options include:(This option is applied to only Windows XP/Vista/7/8/10)

- File - This option means data will be saved in the assigned filename. You may select a different target directory by clicking the New icon. The default directory is C:\MyData\sn_timestamp.txt. If this directory is not created, you will be prompted to create it before data may be uploaded to a file.
- Active Window - This option means scanned barcode data is sent directly to the active program running on your device as if the data is being entered directly from a keyboard.
- Microsoft Excel - This option means barcode data is being imported directly into Microsoft's Excel. Various parameters may be set when uploading data to Excel.

- Select from Current Running Application – This option enables the user to select a currently running application for data synchronization.

- Data synchronization begins immediately if “Automatically Synchronize after Connection” is selected. If not selected, data synchronization is started manually by the user.
- Users SHOULD NOT operate the PC during the synchronization process. It may interrupt the process causing unreliable results.

Note

Synchronization Methods

Fast Synchronization in Burst Mode

The KDC may synchronize data to a host device in Burst mode or Sequential mode. Burst mode provides the fastest synchronization process but could result in error in a poor *Bluetooth* environment. Fast synchronization in Burst mode is only recommended with USB connection.

Synchronize Normal Data

If Synchronize Normal Data option is selected, the KDC will synchronize only Normal Data in KDC memory. If the user wants all data in KDC memory synchronized, the user should select Synchronize Normal Data and Synchronize Application Data.

Synchronize Application Data

If Synchronize Application Data option is selected, the KDC will synchronize only Application Data in KDC memory. If the user want all data in KDC memory synchronized, the user should select Synchronize Normal Data and Synchronize Application Data.

Clear KDC Memory after Synchronization

If this option is selected, the stored barcode data is cleared from the KDC memory after synchronization.

- It is important to clear the KDC memory periodically to prevent a Buffer Full message. Buffer Full prevents the KDC from storing additional data. Stored barcode data may also be deleted using the Reset Memory feature on the KDC.

Automatically Synchronize after Connection

This option lets the user automatically synchronize collected data immediately to the computer when the KDC is connected to the host.

- IMPORTANT: Before selecting this option, remember to configure all options properly.
- Data synchronization may be done manually by clicking the synchronize icon if this option is not selected.

Beep while Synchronization

The user may enable or disable the beep tone during the synchronization process. If this option is selected, a beep is sounded every time barcode data is synchronized. The KDC beeps 5 times when the synchronization process is complete.

Append Data to File

If the user has specified a file name and Append data to File option is enabled, KTSync will append data to the existing file instead of creating a new file.

Current KDC Wedge Method

The KDC may be configured in one of five wedge/store modes:

- Wedge Only - Scanned data is transmitted to the host. The KDC does not store scanned data.
- Wedge & Store - Scanned data is stored in the KDC and transmitted to the host.
- Store Only - Scanned data is stored in the KDC but NOT transmitted to the host.
- Save if Sent - Scanned data is stored in the KDC ONLY if transmission to the host is successful.
- Save if Not Sent - Scanned data is stored in the KDC ONLY if transmission to the host is unsuccessful.

Enable Wedge (Handheld Scanner Mode)

This option will be checked if Wedge Only or Wedge & Store option is selected.

Keep Scan Data in KDC

This option will be checked if Store Only or Wedge & Store option is selected.

Synchronization Options

Synchronize KDC Time with PC Time when Connected

This option enables the user to synchronize the KDC date and time with the host date and time. Synchronization of date and time occurs after the data is uploaded to the host device.

Delays

The user may set transmission delays between barcodes and characters during the synchronization process. It is important to set proper delays to prevent errors during the transmission of collected barcodes. Some Windows applications, such as Excel, require longer delay times.

Attachments

Timestamp, Barcode Type, and Serial Number may be attached to the scanned barcode by selecting these options. The Serial Number of the KDC may be attached to the Start or End of Record.

Prefix and Suffix

- Enter the characters the user wants to attach to the front (Prefix) or back (Suffix) of the barcode in the Prefix and Suffix fields.
- The character set is any combination of ASCII characters including alphanumeric, line feed ("\n"), and carriage return ("\r").

Order and Delimiter

- Select Order of Data – Type, Data, and Timestamp
- Select the Delimiter between Data – Tab, Space, Comma, and Semicolon
- Select the Delimiter between Records – None, LF, CR, Tab, and <LF & CR>

Application Options

Synchronize Non-Compliant Data

The KDC will synchronize both compliant and non-compliant data (filtered data) if Synchronize Non-Compliant Data option is Enabled.

Consolidate Steps in One Record

KTSync will consolidate the data collected in Step 1 with the data collected in Step 2 and/or Step 3. When Consolidate Steps in One Record is enabled, data will be consolidated into one record instead of individual data records for each step. If this option is enabled, non-complete records, i.e. three steps were defined but data was only collected for two steps, will be discarded.

Attach Quantity

If this option is enabled, quantity will be attached to the left or right of the data.

5.3 Barcode & KDC Settings

KTSync enables the user to configure the KDC Scan Options and Barcode Settings. The configuration options for the KDC using KTSync are similar to the Set Barcodes, Code Options, Data Editing and Scan Options on the KDC Menu. Please refer to [11. Appendix A – Barcode & Scan Options](#) for proper barcode settings for the application.

Note

The user must configure barcode and scan options properly for optimal KDC performance.

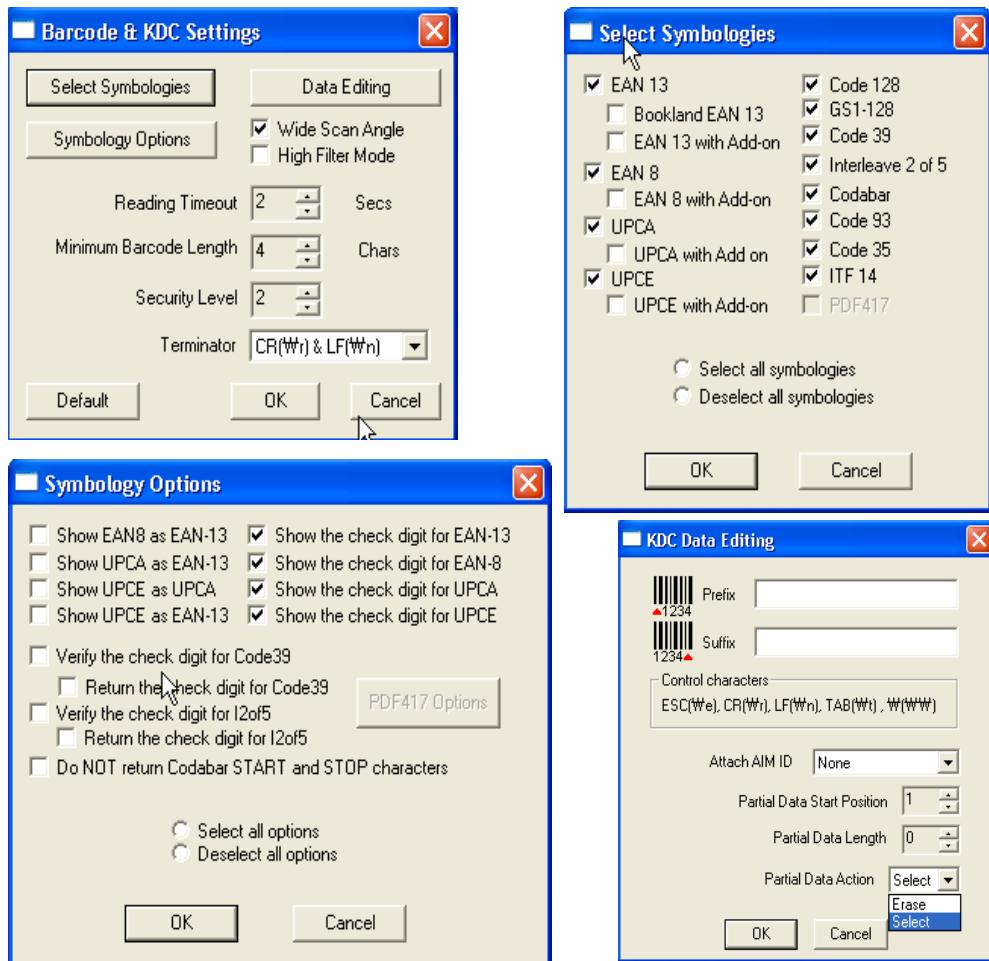


Figure 25 - Barcode & KDC Settings, Symbolologies, Data Editing and Scan Options

Select Symbologies and Symbology Options

The process for scanning and reading barcodes is delicate and complicated. Although your KDC is equipped with a high performance scan engine, if configured incorrectly it may not perform at its peak performance level. To ensure its high performance, the KDC comes configured to optimize its scan engine technology. Unless you clearly understand the impact of your changes to the KDC settings, please do not change factory default settings. Please refer to Appendix A for details. Pressing the Default icon will reset all symbology related options to factory default settings.

Data Editing Option

Prefix - Enables the user to add a prefix to scanned data that may then be stored in KDC or wedged to the host. The Prefix format must be defined in the data format menu of KTSync. The maximum length for a Prefix is 11 characters.

Note

This Prefix option is different from the Prefix option in KTSync that appends the prefix to data during synchronization.

Suffix - Enables the user to add a suffix to scanned data, which may then be stored in KDC or wedged to the host. The Suffix must be defined in the data format menu of KTSync. The maximum length for a Suffix is 11 characters.

Note

This Suffix option is different from the Suffix option in KTSync that appends the suffix to data during synchronization.

AIM ID - Enables the user to add AIM ID to scanned data, which may then be stored in KDC or wedged to the host. AIM ID must be defined in data format menu of KTSync. AIM ID is either added to the end of Prefix or Suffix.

Partial Data: Enables the user to display and store partial data. The user defines the start position and number of characters to be displayed and stored.

- Select the x characters from y position
 - Set Partial Data Start Position to y , Partial Data Length to x , Partial Data Action to Select.
 - Partial Data Length 0 selects all characters from y position.
- Erase the x characters from y position
 - Set Partial Data Start Position to y , Partial Data Length to x , Partial Data Action to Erase.
 - Partial Data Length 0 erases all characters from y position.

5.4 Other Settings

Other options under the Settings menu allow the user to select four additional settings:

- **Ask Confirmation before Trying Auto Connection** prevents unintentional launch of KTSync.
- **Ask Confirmation before Starting Auto Synchronization** prevents unintentional synchronization of data.
- **Minimize KTSync on Start** will minimize KTSync and send it to the tray upon execution.
- **Keep Checking Bluetooth Connection** Enables reconnection of KDC once *Bluetooth* signal is detected. This feature is useful when moving to or from *Bluetooth* host device frequently. KTSync will automatically reconnect *Bluetooth* connection when the user enter an effective *Bluetooth* network range. (*Not Available on KDC100*)

To select any of these settings, click on the box to the left of the setting. A check mark (✓) will display next to the setting to indicate that it is selected.

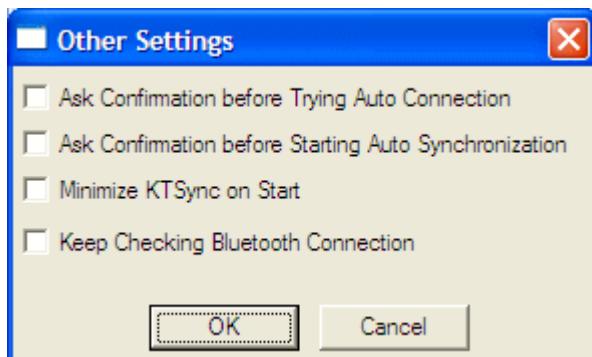


Figure 26 - KTSync® Confirmation Settings

KDC Menu in KTSync

After connecting KDC to PC with a USB cable, run KTSync on your PC and you will see **KDC Menu** on the right side of KTSync window. Click **KDC Menu**, and you may configure your KDC in KDC Menu window, as shown below.

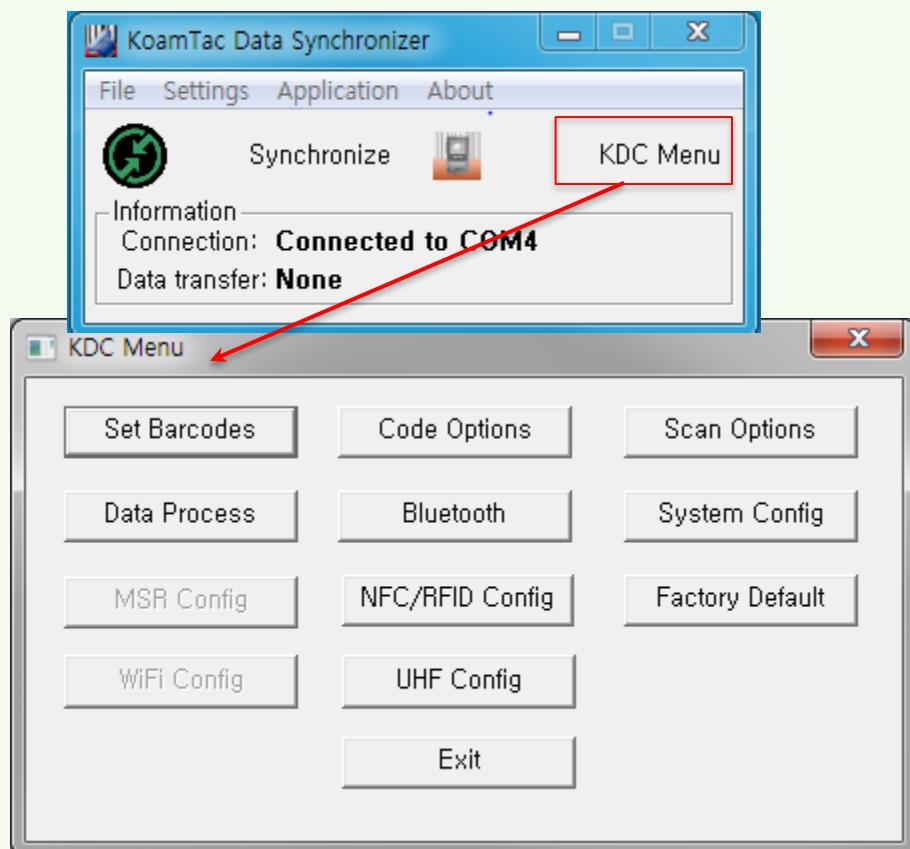


Figure 27 - KDC Menu in KTSync

5.5 Mobile pKTSync

pKTSync provides limited functionality for Pocket PC 2003 and Mobile 5.0+ users.

1. Synchronization - Provides data upload functionality to your applications.
2. Keyboard Emulator - Enables scanned data to be uploaded directly into your application as if the data were being entered manually on a keyboard.

For detailed explanations of these functions, please refer to earlier sections of this chapter.

WARNING: The user must assign the correct COM port to KDC before using pKTSync. Please refer to the mobile device manual for details on Bluetooth pairing and COM port assignment methods.

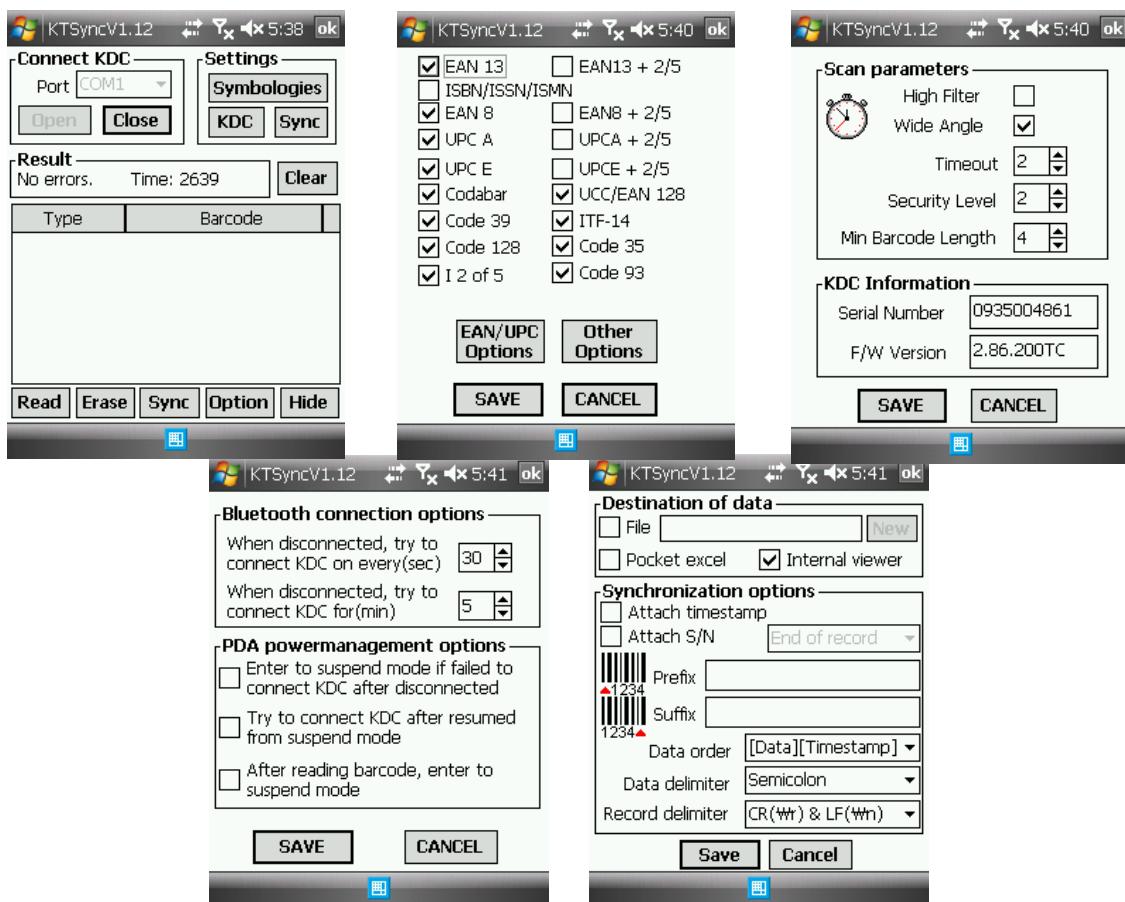


Figure 28 - Mobile pKTSync

5.6 Android aKTSync

The KTSync provides limited functionality of PC aKTSync to Android users.

Note

- aKTSync only supports Android devices with 2.1+ OS version and that are compatible with BluetoothChat application.
- KDC with Bluetooth Spec2.1+EDR doesn't prompt Pin code entry menu.

KDC and Android Pairing

1. Pairing
 - Select **SPP** Bluetooth profile from the KDC **ConnectDevice** submenu in **BT Config** menu.
 - Search KDCxxx from Android and pair the two devices.
 - If SPP2.0 is selected, KDCxxx PIN code is "0000".
2. Connection
 - Click **Connect** icon in aKTSync.
 - Android will list paired *Bluetooth* devices and the user should select the target KDC.
3. Synchronization: Provides data upload functionality to the applications.
4. Settings: The user may change various Synchronization options in the settings menu.
5. Wedging: The user may wedge barcode data to any Android application. Press the home key and launch the target application.

Launch KTSync

1. Download and install aKTSync from the Android Play Store.
2. Change KDC Bluetooth **ConnectDevice** option to *SPP*.
3. Execute Android *Bluetooth* device scan option and KDC *Bluetooth* pairing option.
 - A. Execute KDC *Bluetooth Pairing* option.
 - B. Launch **Settings** on the Android device.
 - C. Select **Wireless and Networks**.
 - D. Click on **Bluetooth Settings**.
 - E. Click on **Scan devices**.
 - F. The Android device will display the KDC model and 6 digits of the serial number.
4. Press the KDC list entry, enter "0000" PIN code, and press **OK**.

5. When paired, the Android device will display "*Paired but not connected*".
6. Launch aKTSync program.
 - A. Press menu key and select the **Connect** option on the top left.
 - B. From the list of paired devices, choose the KDC to use.
 - C. On the top menu bar of aKTSync, you will see a message "*connecting*", and then "*connected*".
 - D. On the KDC display, you will see "Pairing Succeeded!!!" and then "Bluetooth Connected".
 - E. Select **Settings** option on the bottom left to change KTSync setting.

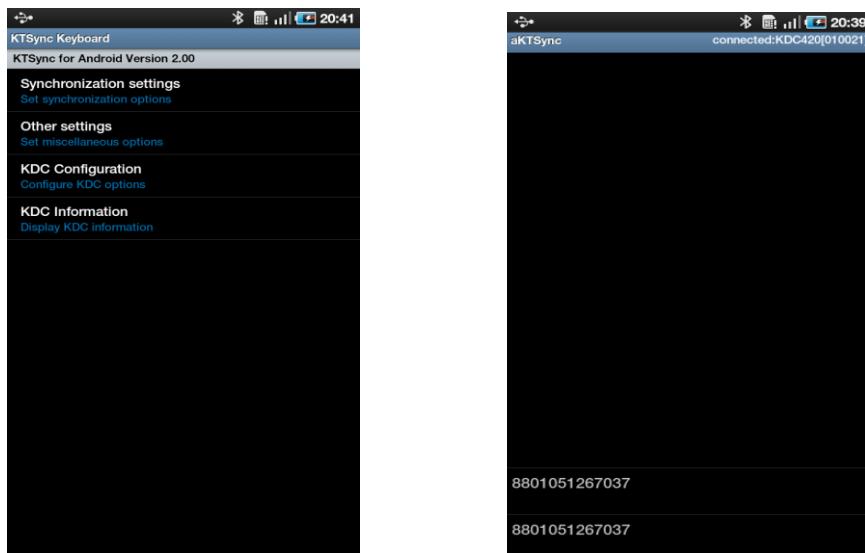
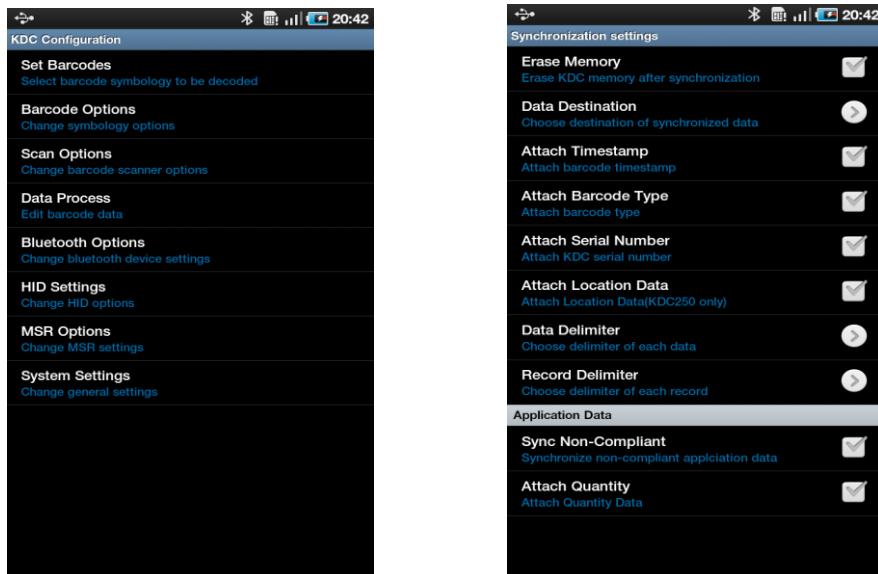


Figure 29 - Android aKTSync

Keyboard Wedge

1. Launch **Settings** on the Android device.
2. Select **Language and Keyboard** (or **Input method**).
3. Select **KTSync Keyboard**.
4. Launch the application and touch the input box to focus.
5. The barcode will be wedged to the input box upon scanning a barcode.

5.7 iPad/iPhone/iPod Touch KTSync

The KTSync for iPad/iPhone/iPod touch provides limited functionality of PC KTSync for iPad, iPhone and iPod touch users.

1. The KDC supports **SPP** and **MFi** Bluetooth profiles.
2. The iPhone/iPad/iPod touch should use **MFi** Bluetooth profiles. **MFi** is the default profile of KDCi models.
3. Download the KTSync program from the App Store.
4. Enable the iPhone/iPad/iPod touch Bluetooth power from the **Setting > General > Bluetooth** menu.

Note

- Users have to disable MFi option in System > MFi menu to use HID Bluetooth profiles.
 - Users have to RESET the iPhone/iPad/iPod touch to change "HID to MFi mode" or "vice versa" after removing previous KDC connection.
- KDC with Bluetooth Spec2.1+EDR does not prompt Pin code entry menu.

KDC20i/30i/200i/250i/270i/270i/350i/400i/470i/500i connection using MFi mode

1. Download and install KTSync from the Apple App Store.
<http://itunes.apple.com/us/app/ktsync/id372916602?mt=8>
2. Pair KDC and iOS Device
3. Launch KTSync and configure Settings.

iKTSync Settings

iKTSync provides following Settings menu.

- Synchronization - The user may configure Synchronization options, such as destination of data, data formation and delimiters.
- Other settings - Users may configure KDC350 GPS module, disconnection options and soft trigger button.




Figure 30 - iPad/iPhone/iPod touch KTSync

How to Connect and Reconnect MFi Mode using UP Keys


1. The user needs to select the option to use this feature in the BT Config > BT Toggle.
2. Press the UP button to connect or reconnect to the iPhone/iPad/iPod touch.

How to use Keyboard Wedge with iKTSync

1. Navigate to the iPhone/iPad/iPod Settings > General > Keyboard > Keyboards > Add New Keyboard... > Select the KTSync keyboard to be added.

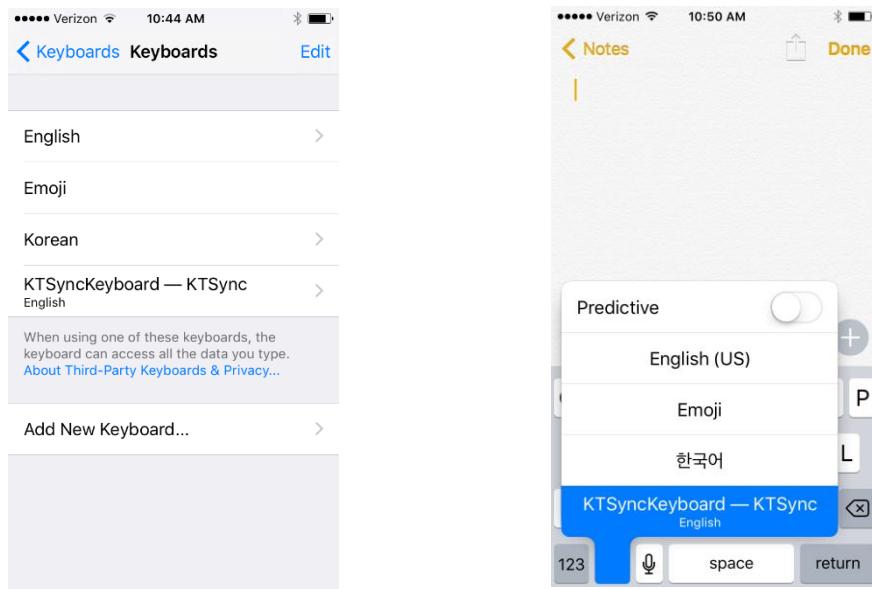

2. Select the KTSync Keyboard > Allow Full Access.

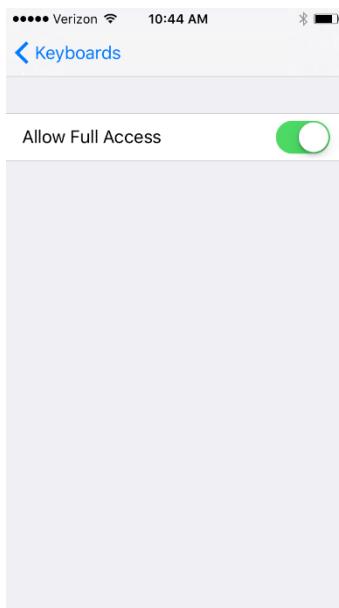

3. Open up the application you want to scan into, and tap on the screen so the on-screen keyboard appears. Tap and hold on the globe icon located to the left of the spacebar. Select the KTSync Keyboard & begin scanning!

Note

The KDC must be connected to KTSync & the KTSync keyboard must be selected in order for this to work.

5.8 Blackberry bKTSync

The bKTSync provides limited functionality of PC KTSync for Blackberry users.

KDC with Bluetooth Spec2.1+EDR does not prompt Pin code entry menu.

Note

1. Download and install bKTSync from the Blackberry App World.
<http://appworld.blackberry.com/webstore/search/ktsync?lang=en>
2. Go to **Blackberry Options > Applications** menu and enable **Input Simulation** option.
3. Change KDC Bluetooth profile in **ConnectDevice** option to **SPP**.
4. Execute Blackberry *Bluetooth* manager and KDC *Bluetooth* pairing option:
 - A. Execute KDC Bluetooth **Pairing** option.
 - B. Launch the Blackberry Bluetooth manager and select "Search". The KDC model and 6 digits of the serial number will be displayed.
 - C. Highlight the KDC and press the Enter or Select Key.
 - D. Enter "0000" PIN code and press the Enter or Select Key.
 - E. The Blackberry will display "Pairing with KDC" and then "complete."
 - F. Close the Blackberry Bluetooth manager.
5. Go to Downloads folder and execute KTSync.
6. The user may configure KDC options in KDC settings and Symbologies Settings menu.
7. Go to KTSync Synchronization Settings and select Destination. To send collected barcode data as an email attachment, choose **Email Attachment** as destination and enter in the email address, subject, and body message that the user want to send. The user may enter multiple email addresses using the semicolon (;) separator.
8. To scan barcodes into any application (like email, notes, worksheet or web browser), press the menu key and select **Running in the background** option. bKTSync will maintain the connection and place the scanned barcode data wherever the cursor is flashing.



KDC Settings

Select Laser Angle	Wide ▾
Set Scan Timeout	2 seconds ▾
Set Security Level	2 ▾
Set Minimum Barcode Length	2 ▾

Symbologies Settings

Enable/Disable Symbols

- EAN13
- EAN8
- UPCA
- UPCE
- Code39
- ITF14
- Code128
- Interleave 2 of 5
- Codabar
- GS1-128
- Code93

Synchronization Settings

Select Destination	Email Attachment ▾
Attach Barcode Type	No ▾
Attach Timestamp	No ▾
Attach Serial Number	Do not attach ▾
Select Data Delimiter	Tab ▾
Select Record Delimiter	CR&LF ▾
Email Address:	info@koamtac.com
Email Subject:	KDC BB Ktsync test email

Synchronization Settings

Attach Barcode Type	No ▾
Attach Timestamp	No ▾
Attach Serial Number	Do not attach ▾
Select Data Delimiter	Tab ▾
Select Record Delimiter	CR&LF ▾
Email Address:	info@koamtac.com
Email Subject:	KDC BB Ktsync test email
Email Body Message:	Hi...

Figure 31 - BlackBerry bKTSync

5.9 KTSync for Mac OS X

The KTSync Mac OS X version provides limited functionality of PC Windows KTSync for Mac OS X users.


- KTSync for Mac OS X version supports both Bluetooth SPP profile and USB connection. The user should pair KDC with Mac before using the KTSync program via Bluetooth connection.
- Mac OS X version KTSync is built as a X86 binary application and works with the Intel-based Mac. It is verified on Mac PC running Mac OS X 10.6.5 and later versions.

Note

KTSync Mac OS X version supports the following features:

- ✓ Keyboard wedge function to a file, internal viewer, active window, and user application.
- ✓ Synchronization to a file, internal viewer, active window, and user application.
- ✓ Automatic connection and disconnection on USB port.


The user will see the following initial KTSync screen upon launching the program. KTSync will connect automatically if KDC is plugged in a USB port or if KDC is paired.

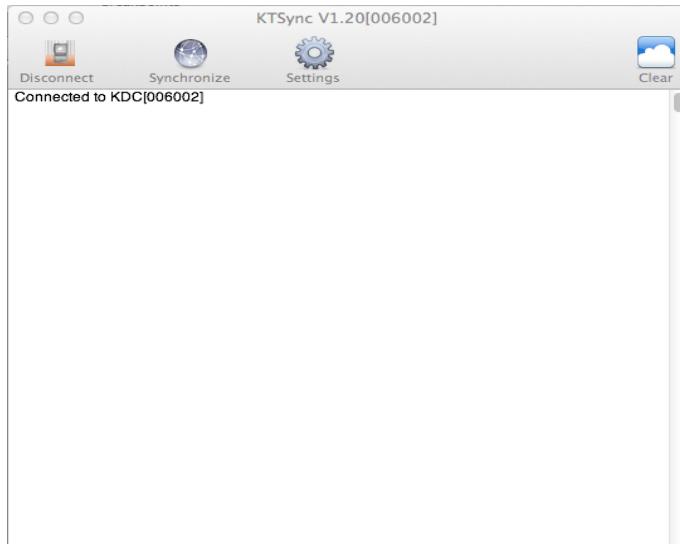

Connect Button




The user may connect the Mac with the KDC that is paired or plugged into the USB port by clicking the Connect button. The following screen will be displayed when this button is pressed, and KTSync will start to connect to the selected KDC.



Disconnect Button



KTSync changes Connect button to Disconnect button once the KDC is connected. The user may disconnect the KDC manually by selecting connected KDC on the following screen.

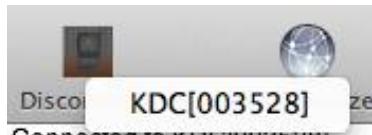

Synchronize Button

The user may start the synchronization process by pressing the Synchronize button. The user may select the destination of barcode data in the settings menu. There are 4 selectable destinations: File, Internal viewer, Active window, and User application.

Clear Button




The user may press this button to clear the KTSync internal viewer.

Settings Button




The user may configure synchronization options on the following screen by pressing the Settings button.

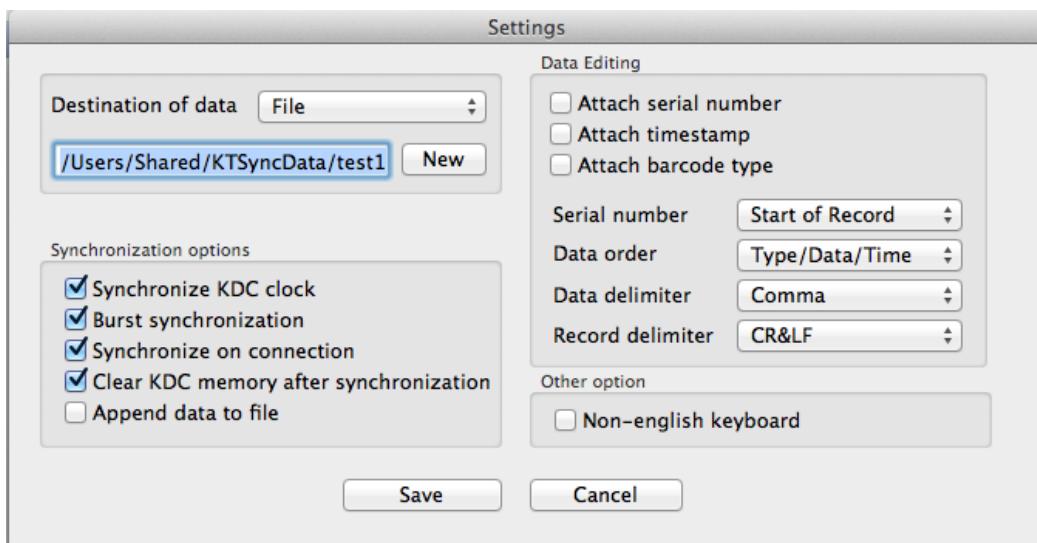

Destination of Data

The KTSync program wedges or downloads barcode data to one of the following four destinations:

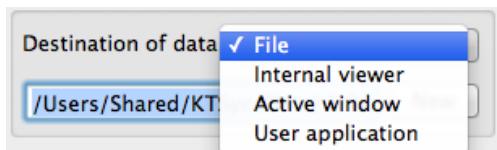

- **File:** The KTSync makes a file name based on 3.11 if file name is specified as an "sn_timestamp.txt". The default directory is /Users/Shared/KTSyncData directory. The user may define another directory or another filename by clicking the "New" button. The maximum file path length is 128 characters.
- **Internal Viewer:** The KTSync displays barcode data in KTSync internal text viewer.
- **Active Window:** The KTSync sends barcode data to current active window if Active window option is selected.
- **User Application:** The user may define the target application by pressing the "New" button. The maximum application name path length is 128 characters.

Synchronization Options

- **Synchronize KDC Clock**
KTSync will set the KDC's date and time with Mac PC date and time when the KDC is connected to Mac, if this option is enabled.

- **Burst Synchronization**
KTSync will synchronize barcode data from KDC in burst mode. Otherwise, KTSync would synchronize barcode data one by one. This option is enabled by default and maynot be disabled.
- **Synchronization on Connection**
KTSync will automatically synchronize barcode data from the KDC when the KDC is connected, if this option is enabled.
- **Clear KDC Memory After Synchronization**
KTSync clears barcode data stored in the KDC's memory once synchronization has finished, if this option is enabled.
- **Append Data to File**
KTSync appends synchronized data to existing file specified on destination. If file does not exist then KTSync creates a new file.

Data Edition

- **Attach Serial Number**
The KTSync will add a KDC serial number to barcode data. This option is enabled by default and maynot be disabled.
- **Attach Time Stamp**
The KTSync would add timestamp to barcode data. This option is enabled by default and maynot be disabled.
- **Attached Barcode Type**
The KTSync would add barcode type to barcode data. This option is enabled by default and maynot be disabled.
- **Serial Number**
When **Attach serial number** is enabled, this option determines when to attach serial number. "Start of record" means to attach at the front of record and "End of record" means to attach to the end of record.
- **Data Order**
This option specifies the order of data (Barcode Type, Barcode Data and Timestamp) in the record.
- **Data Delimiter**
This option is used to select a character to be added between barcode data, serial number and timestamp and/or barcode type. User may select one of the following: **None, Tab, Space, Comma and Semicolon** as the data delimiter. The **Comma** is selected as the data delimiter by default.
- **Record Delimiter**
This option is used to select a character to be added at the end of the barcode record. The user may select one of **None, CR, LF, TAB, and CR&LF** as the record delimiter. The **CR&LF** is selected as the record delimiter by default.

Other Options

- **Non-English Keyboard**

This option is used when the barcode data has non-English characters and a non-English keyboard.

6. Application Generation

Note

KDC FW2.85 does not support the Application Generation feature. Users should upgrade FW2.85 to FW2.86 or FW3.0+ to use Application Generation feature.

When you select the Application menu from the KTSync, the user may choose from the following five Applications: Generation, DB Lookup, Master/Slave, Pick/BIN, and Inventory. Users may also download saved programs using the Import & Download option.

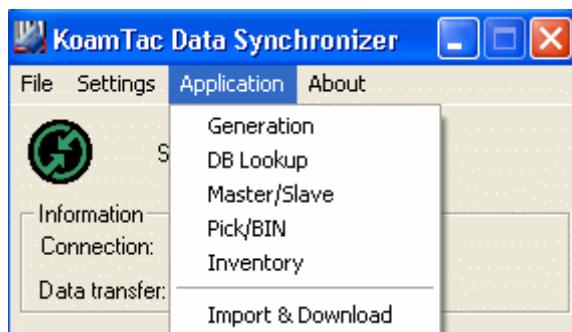


Figure 32 - Application Menu

When the Application tool is selected, the KDC will beep once to acknowledge a connection between the KDC and the Application tool. The following KTSync warning window will pop up if the downloaded application in KDC does not match with KTSync application tool.

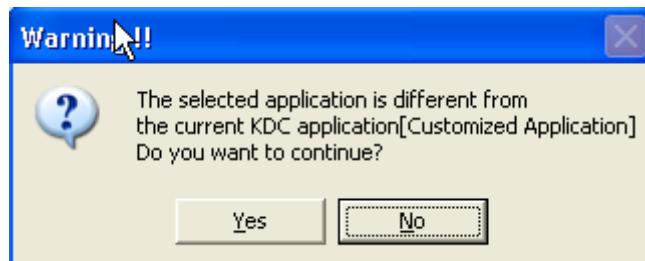


Figure 33 - Application Warning Window

Note

KDC will wedge barcode data to the host in application mode if “wedge and store always” option in data process menu is selected and KDC firmware version is higher than 2.86.xxx.G or 3.0+.

6.1 Application Generation

KDC Application Generation tool is a robust feature that enables the user to create custom applications for collecting and managing barcode data. To create a custom application, select the Generation submenu from the Application menu in KTSync®.

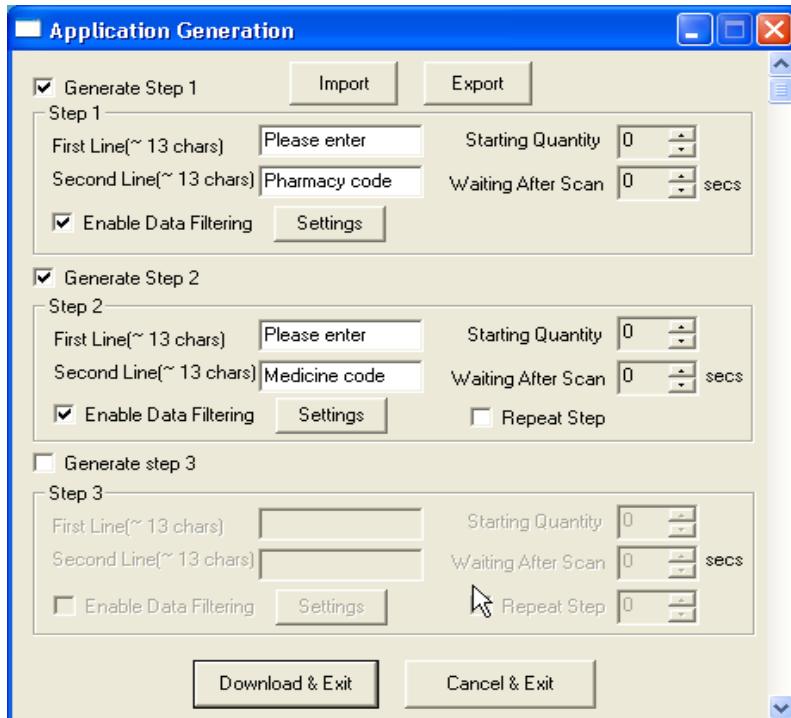


Figure 34 - Application Generation Menu

Generate Application

Generate step 1 - To generate a custom application, click on the Generate Step 1 box. This enables the user to define the user prompts and data collection settings for Step 1 of the custom application. Below is a description of each field. These prompts are the same when selecting Generate step 2 and Generate step 3.

Note

The custom application may include only Step 1.

- **First line**
Enter up to 13 characters; these will display on the first line of the KDC.
- **Second line**
Enter up to 13 characters; these will display on the second line of the KDC.
- **Starting quantity**

Enter a predefined start quantity for each scanned barcode. The start quantity may be defined from 1 to 128. Use the up or down side key to choose the desired quantity.

- **Waiting to scan**

Enter the number of seconds the KDC pauses before the user prompts display. During this timeout period, the user may modify the quantity. If this field is set to zero, the quantity field may not be adjusted. This field may be defined from “-1” to “30” seconds. “-1” second enables infinite waiting of user quantity input.

- **Enable data filter**

Check this box to enable the data filtering option. Data filtering enables the user to predefine different aspects of the barcode data the user are collecting.

Data Filter Settings

When the user select Enable data filtering, the user must click on the Settings button to select the Data filter setting. The options for the Data filter settings are the same for Step1, Step 2, and Step 3.

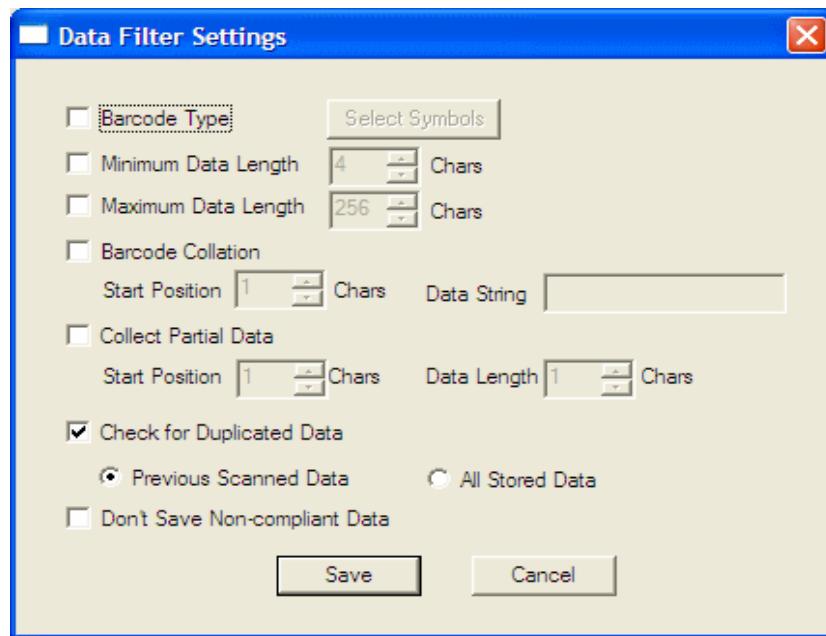


Figure 35 - Data Filter Settings

- **Barcode Type**

This field enables the user to select the type of barcodes the KDC will collect. When the user clicks on the box, Select Symbols is enabled. A listing of the symbologies

supported by the KDC will display. To select a barcode symbology, click on the box associated with the symbology.

- **Minimum Data Length**

This field enables the user to define the minimum length of the scanned barcode. The length may be between 2 and 36 (1D models), 2 and 48 (2D models) characters. If the user scans a barcode that has a length of less than the defined length, the barcode data is not collected.

Note

The default KDC minimum barcode length defined in scan option is 4. Therefore, users should change KDC minimum barcode length to 2 or 3 to define minimum data length to 2 or 3.

- **Maximum Data Length**

This field enables the user to define the maximum length of a scanned barcode. The defined length may be between 2 and 256 characters. If the user scans a barcode that has a length greater than the defined length, the barcode data is not collected.

- **Barcode Collation**

This option enables the user to define a data string that the KDC will use to compare scanned barcodes.

- Starting Position – This is the start position of the scanned barcode data to be compared with the defined data string.
- Data String – This is the defined value to be compared with scanned barcode data. This value may be up to 32 characters.

- **Collect Partial Data**

This option enables the user to define partial barcode data to be collected when a barcode is scanned. Only the partial data will be stored in the KDC.

- Start position – This is the starting position that the KDC will use when collecting scanned barcode data.
- Data Length – This is the length of partial data to be stored by the KDC.

- **Check for Duplicated Data**

This option enables the user to prevent the collection of duplicate data.

- Previous Scanned Data – This option enables the user to compare the scanned barcode with the previously scanned barcode and treat it as non-compliant data if the user scanned the same barcode twice.
- All Stored Data – This option enables the user to compare the scanned barcode with stored barcode data and treat it as non-compliant data if the same barcode already scanned and stored.

- **Do not Save Non-Compliant Data**

This field tells the KDC how to manage non-compliant data based on the defined data filtering fields. If this field is enabled, non-compliant data is NOT stored in the KDC. If this option is not enabled, non-compliant data is stored.

Generate step 2

To include another step in the data collection process, click the box, Generate step 2. This step has the same options as Step 1. In this step, the user have the option of repeating step 2 by clicking the box, Repeat Step.

Note

This field is disabled when the application has three steps.

Generate step 3

To include a third step, click the box, Generate step 3. This step has the same options as step 1 and 2. In this step, the user has the option to repeat steps 2 or 3.

Application Download and Execution

Before running your application, it must be downloaded to KDC.

1. Click the “Download” icon from Application Generation Window.
2. Change KDC from Normal mode to Application mode.
 - A. Press two side buttons simultaneously to enter menu mode.
 - B. Select KDC mode and enter scan button.
 - C. Change to Application mode.
 - D. Save and exit from menu mode.
3. KDC will run in normal mode if you do not change to Application mode after downloading the application.
4. If you want to delete the downloaded application in your KDC, select App. Data in Reset Memory after you go to System Config in KDC Menu.

6.2 Predefined Applications

KTSync provides four Predefined Applications: Master/Slave, Pick/Bin, DB Lookup and Inventory.

Master/Slave

Master/Slave predefined application enables you to define a *master* barcode for comparison with one or more *slave* barcodes. The predefined application may be run once or continuously. Within either setting, you may define a substring for comparison of master and slave barcodes.

Master/Slave Onetime

Define one *master* barcode and compare it with one *slave* barcode.

Master/Slave Continuous

Define one *master* barcode and compare it with multiple *slave* barcodes.

Collation Options

Works in either Onetime or Continuous Mode to compare a substring within the master and slave barcodes.

- **Master start position** - Select the numeric position of start substring character in Pick barcode, 1 to 255.
- **Slave start position** - Select the numeric position of start substring character in Pick barcode, 1 to 255.
- **Comparing Barcode Length** - Number of characters to be compared, 0 to 255. 0 means all characters.

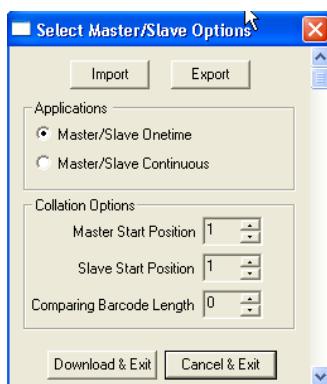


Figure 36 - Master/Slave Application Settings

Pick/Bin

The Pick/Bin predefined application is a special version of the Master/Slave predefined application. The Pick/Bin application enables you to define the Pick ID and the barcode symbology for comparison with a defined Bin.

- **Number of ID and Symbology**

Define Pick ID characters from 1 to 32 and the barcode symbology.

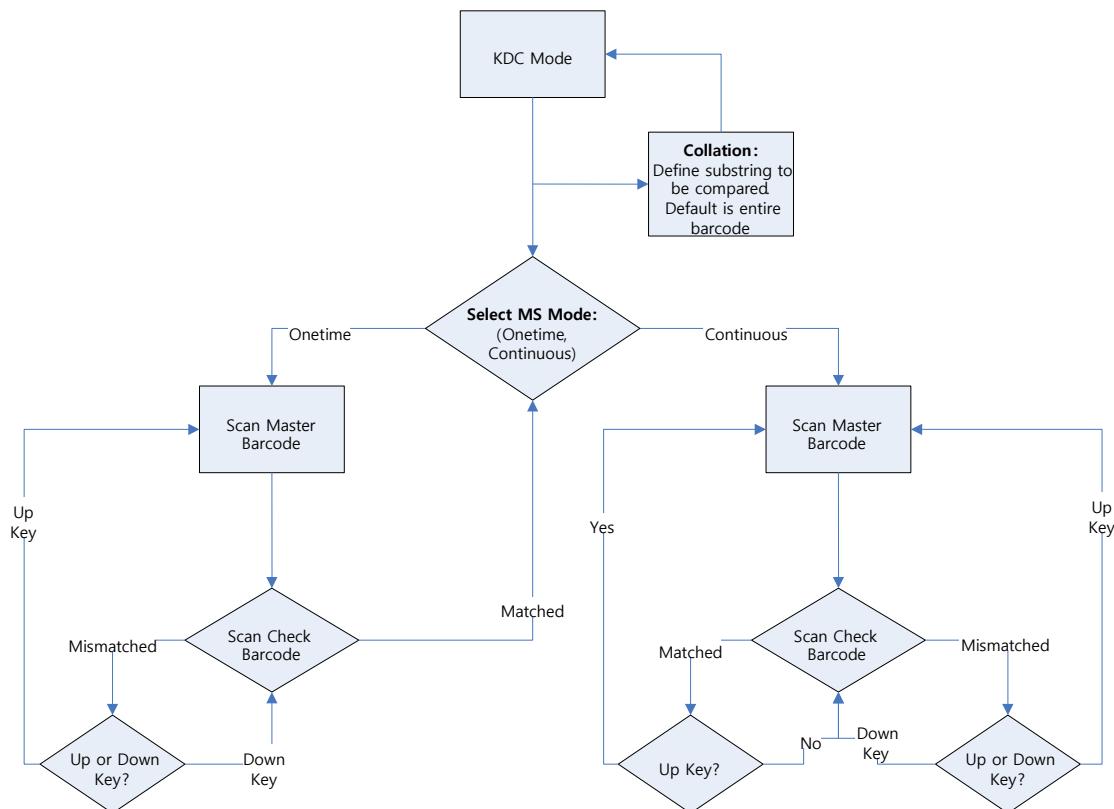


Figure 37 - Master/Slave Application Flow Chart

- **Pick Start Position and Symbology**

Select numeric position of start substring character in Pick barcode from 1 to 255 and the barcode symbology.

- **Bin Start Position and Symbology**

Select the numeric position of start substring character in Bin barcode from 1 to 255 and the barcode symbology.

- **Comparing Barcode Length**

Select the number of characters to be compared from 0 to 255. 0 means all characters.

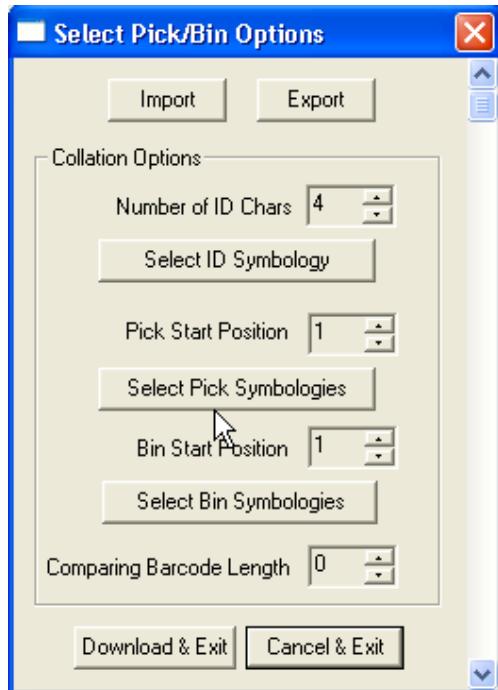


Figure 38 - Pick/BIN Application Menu

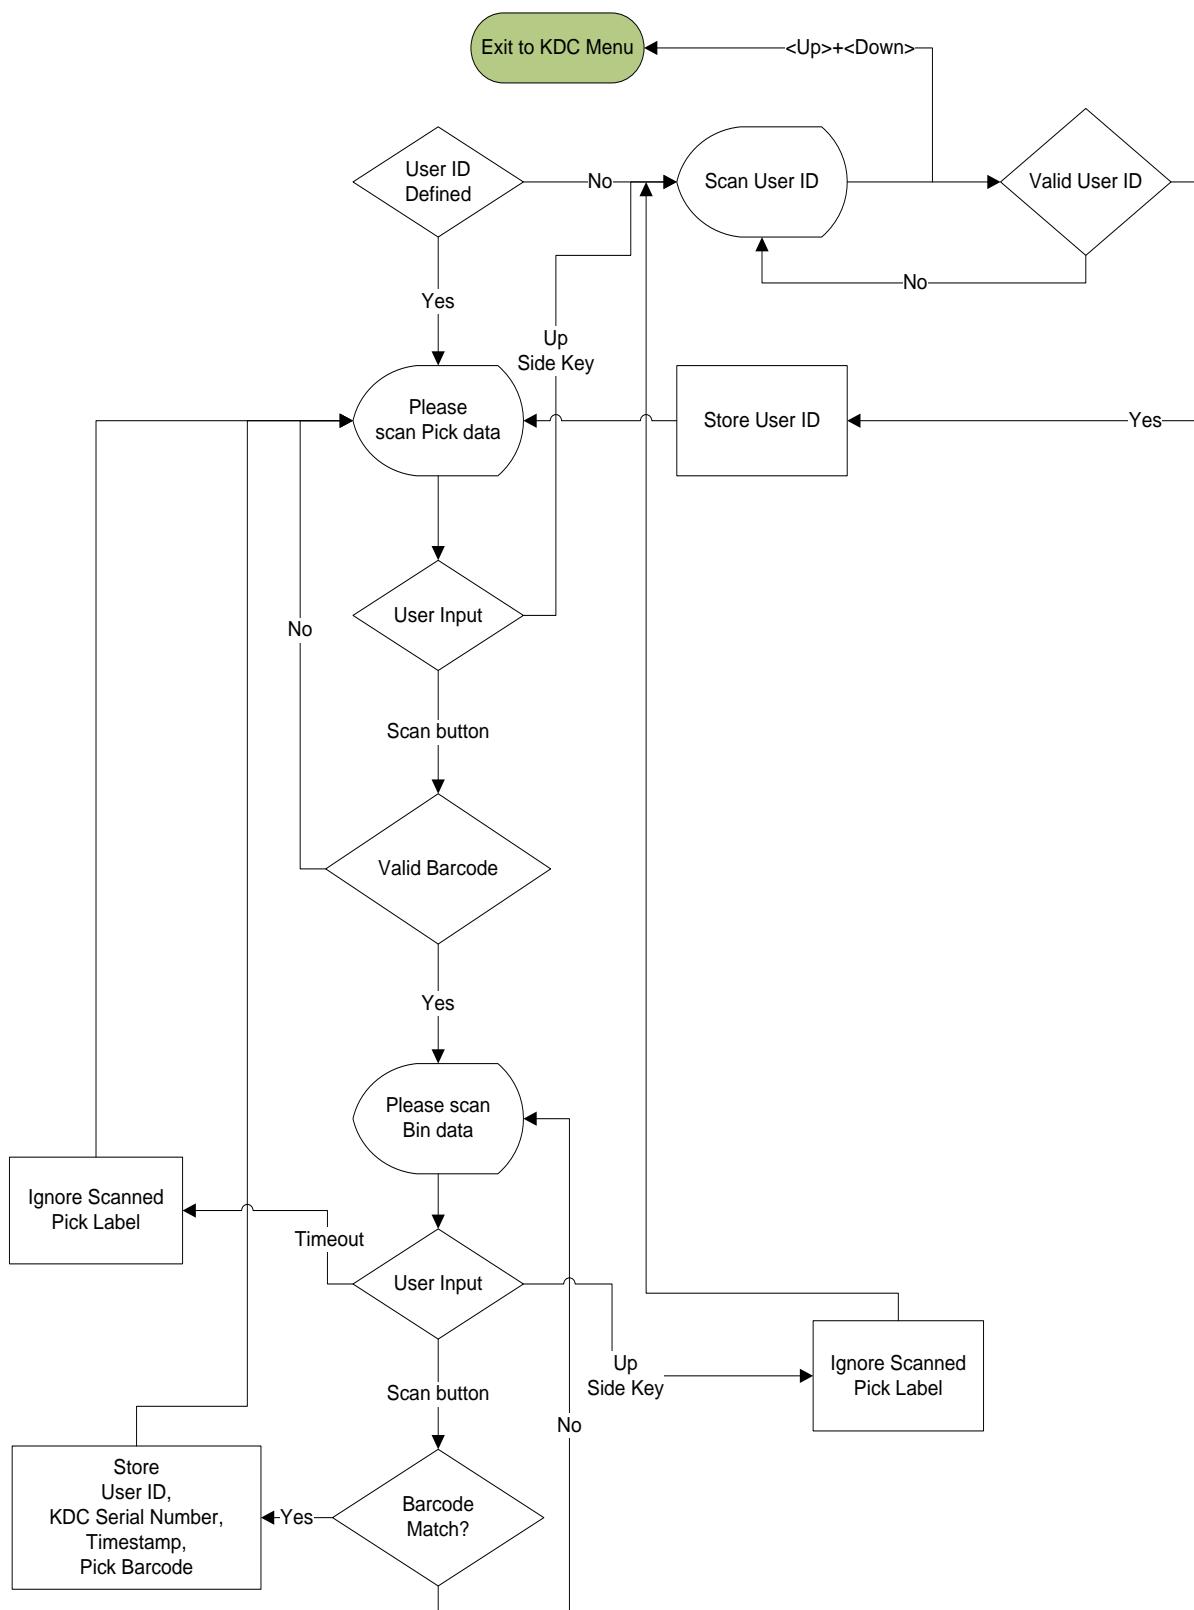


Figure 39 - Pick/BIN Application Flow Chart

DB Lookup Application

The DB Lookup application enables the user to download a database to the KDC that may then be utilized for advanced AUTO-ID applications, such as displaying additional data after scanning a barcode. For example, using our DB Lookup application, you may download a product database including information such as description, price, and stock quantity. With the advanced data functionality built-in to the KDC, you may easily display product price, description, and stock level after the product's barcode is scanned.

Functionality of DB Lookup Application (based on the firmware version v2.86 and v3.0+)

- The database size may not exceed 800 records (v2.86) / 61,440 records (v3.0+).
- The maximum record size is 128 bytes.
- Each record may have up to 4 fields, including the barcode, which is the primary key.
- The maximum field size is 39 characters.
- Quantities may be entered by pressing the UP or DOWN scroll buttons after DB fields are displayed.
- Quantity may be 1 to 128.
- The user may create a database using Microsoft Excel.
 1. Excel file must be saved as .txt.
 2. Records should be separated by CR/LF.
 3. Fields should be separated by TAB.
 4. Database should end with CR/LF.
 5. Last 4 bytes of database should be CR/LF/CR/LF.

DB Lookup Fields and Settings (based on the firmware version v2.86 and v3.0+)

- **Download DB to KDC** - Downloads user created database to KDC.
- **Starting Quantity** - Enter predefined start quantity for each scanned barcode. The start quantity may be defined from 1 to 128 and may be adjusted using UP or DOWN buttons.
- **Barcode Field** - Select the position of barcode field in database from 1 to 4.
- **Stored Barcode Start Position** - Select the numeric position of start substring character of barcode in database from 1 to 39.

- **Scanned Barcode Start Position** - Select the numeric position of start substring character of scanned barcode from 1 to 39.
- **Comparing Barcode Length** - Number of characters to be compared from 0 to 255 where 0 is all characters.
- **Display on KDC** - Define database fields to be displayed on KDC. KDC may display one to three fields. KDC will display one field in two or three lines, if same field is specified in line entering option.

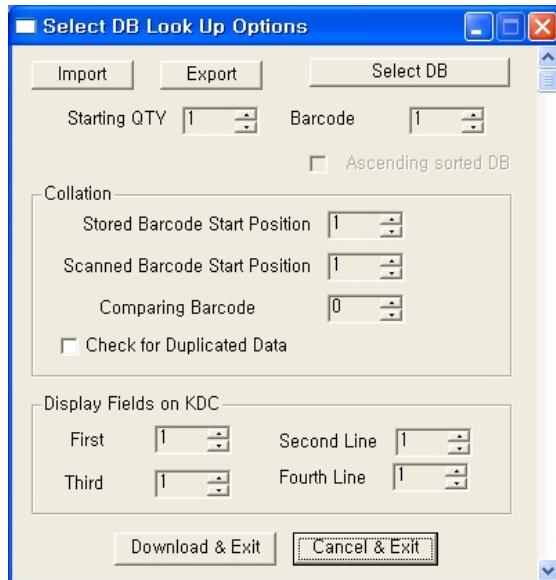


Figure 40 - DB Lookup Application Menu

Inventory Application

The Inventory application enables the user to count inventories by scanning inventory barcodes. This application will increase inventory item count if the same item is scanned. Users may also download an inventory database to the KDC. If inventory DB is downloaded, KDC will display inventory description.

Functionality of Inventory Application (based on the firmware version v2.86 and v3.0+)

- The inventory may not exceed 800 items (v2.86) / 61,440 items (v3.0+).
- The maximum record size is 128 bytes.
- Each record may have up to 4 fields, including the barcode, which is the primary key.
- The maximum field size is 39 characters.
- Quantities 1 to 32786 may be entered by pressing the UP or DOWN buttons after inventory is scanned.

- Starting Quantity may be 1 to 128.
- Min/Max. Data Length is between 2 to 256 (1D models) or 4 to 256 (2D models).
- Barcode Collation Start Position is between 1 to 256.
- The length of Collation Data String is between 1 to 30.
- Collect Partial Data Start Position is between 1 to 256.
- Collect Partial Data Length is between 1 to 256.
- Users may create an inventory database using Microsoft Excel.
 - Excel file must be saved as .txt.
 - Click **User Inventory DB** option to display inventory description.
 - Click **Do not add non-existing item into DB** if one do not wish to add new items into inventory DB.
 - The number of Barcode Data Field is between 1 to 4.
 - The position of Display Filed is between 1 to 4.

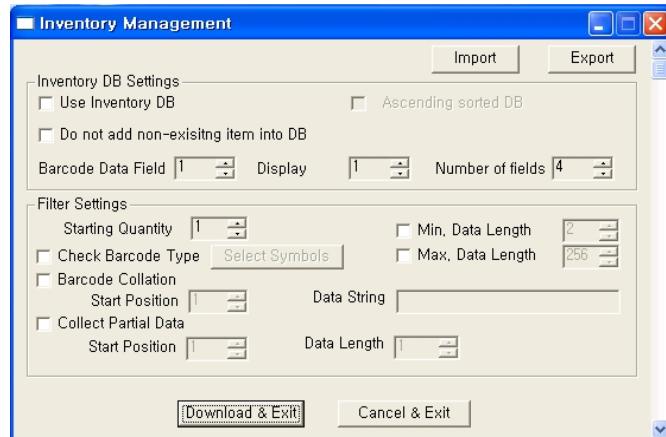


Figure 41 – Inventory Application

7. Troubleshooting

ISSUE	CAUSE	SOLUTION
KDC not working	Dead battery	<ul style="list-style-type: none"> Charge battery by connecting KDC to your PC using the included cable
	Hardware failure	<ul style="list-style-type: none"> Contact distributor for technical support
KDC not charging	Bad battery	<ul style="list-style-type: none"> Replace battery – Contact Local Distributor
	Poor USB port	<ul style="list-style-type: none"> USB port doesn't supply proper current to KDC <ul style="list-style-type: none"> - Charge KDC using a different USB port on your PC
Failed reading	Damaged barcode	<ul style="list-style-type: none"> Scan a different barcode
	Out of scan range	<ul style="list-style-type: none"> Move the scanner closer to barcode Move scanner farther from the barcode
	Incorrect angle	<ul style="list-style-type: none"> Change the angle of scanner to barcode
	Symbology not supported	<ul style="list-style-type: none"> Contact KOAMTAC - www.KOAMTAC.com for possibility of custom symbology support
	Scan options	<ul style="list-style-type: none"> Check scan option settings
	Dirty scan window	<ul style="list-style-type: none"> Clean scan window
	Damaged scan window	<ul style="list-style-type: none"> Replace scan window
KDC reads wrong barcode	Dirty scan window	<ul style="list-style-type: none"> Clean scan window
	Damaged scan window	<ul style="list-style-type: none"> Replace scan window
	Poor quality barcode	<ul style="list-style-type: none"> Select only necessary barcodes Increase minimum barcode length Increase security level
Can't communicate with PC, PDA, or smartphone	USB cable is not connected properly	<ul style="list-style-type: none"> Check cable connection between KDC and host device
	Software is not working properly	<ul style="list-style-type: none"> Reload the software
	COM configuration	<ul style="list-style-type: none"> Check COM port configurations

LED blinks yellow	Low battery power	<ul style="list-style-type: none"> Charge the battery by connecting KDC to PC. KDC will lose collected data if the battery is empty.
Buffer Full Message	Full Memory	<ul style="list-style-type: none"> Clear the Memory using Synchronization program
Empty Battery Message	Empty battery	<ul style="list-style-type: none"> Connect USB immediately. Synchronize the collected data and charge KDC
Abnormal KTSync Operation on DELL PC	Quickset Utility	<ul style="list-style-type: none"> Disable Quickset Utility before using KTSync. Dell Quickset utility interrupts normal KTSync operation
	WSED Utility	<ul style="list-style-type: none"> Disable WSED Wireless enable/disable utility delete the folder C:\Program Files\WSED, which contains a file WSED.exe, with the same icon as in the taskbar Delete the registry entry KEY_LOCAL_MACHINE \SOFTWARE\Microsoft\Windows\CurrentVersion\Run\WSED
Touch Keypad not working (KDC500)	Foreign Object detected	<ul style="list-style-type: none"> Clear any foreign object (including your finger) placed on the touch keypad and reset KDC.
	Hardware failure	<ul style="list-style-type: none"> Contact distributor for technical support
Compromise Message displayed (KDC500)	Security Attack detected	<ul style="list-style-type: none"> Contact distributor for technical support

Table 6 - Troubleshooting Techniques

8. Warranty

LIMITED WARRANTY AND DISCLAIMERS

BY OPENING THE PACKAGE OF THIS PRODUCT YOU AGREE TO BECOME BOUND BY THE LIABILITY AND WARRANTY CONDITIONS AS DESCRIBED BELOW.

UNDER ALL CIRCUMSTANCES, THIS MANUAL SHOULD BE READ ATTENTIVELY, BEFORE INSTALLING AND OR USING THE PRODUCT.

Serial Number

A serial number appears on the KDC label. This official registration number is strictly related to the device purchased. Make sure that the serial number appearing on your KDC is not removed. Removing the serial number will affect the warranty conditions and liability disadvantageously, so please maintain the label with serial number on the KDC. Units with the serial number label removed should not be operated.

Warranty/Warranty Period/Liability

KOAMTAC, Inc. ("KOAMTAC") manufactures its hardware products in accordance with industry-standard practices. Unless otherwise agreed in a contract, KDC is warranted for a period of one year after purchase, covering defects in material and workmanship except rechargeable battery. KOAMTAC will repair or, at its opinion, replace products that prove to be defective in material or workmanship under proper use during the warranty period. KOAMTAC will not be liable in cases (i) in which the unit has been repaired or altered unless done or approved by KOAMTAC, (ii) in which the unit has not been maintained in accordance with any operating or handling instructions supplied by KOAMTAC, (iii) in which the unit has been subjected to unusual physical or electrical stress, misuse, abuse, power shortage, negligence or accident or (iv) in which the unit has been used other than in accordance with the product operating and handling instructions. Preventive maintenance is the responsibility of the customer and is not covered under this warranty. Under no circumstance will KOAMTAC be liable for any direct, indirect, consequential or incidental damages arising out of use or inability to use either the hardware or software, even if KOAMTAC has been informed about the possibility of such damages.

Warranty Coverage and Procedure

During the warranty period, KOAMTAC will repair or replace defective products returned to KOAMTAC warehouse. International customers should contact the local KOAMTAC office or support center. If warranty service is required, KOAMTAC will issue a Return Material Authorization Number. Products must be shipped in the original or comparable package, shipping and insurance charges prepaid. KOAMTAC will ship the repaired or replacement product freight and insurance prepaid. Customer accepts full responsibility for its software and data including the appropriate backup thereof. Repair or replacement of a product during warranty will not extend the original warranty term.

CAUTION: Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

9. Contact Information



CORPORATE HEADQUARTERS

116 Village Blvd., Suite 305

Princeton, NJ 08540, USA

Phone: 609-256-4700, FAX: 609-228-4373

Email: support@koamtac.com

For more information, visit our website - www.koamtac.com

10. Appendix A – Barcode & Scan Options

The process for scanning and reading barcodes is delicate and complicated. Although the KDC is equipped with a high performance scan engine, if configured incorrectly, it may not perform at its peak performance level. To ensure its high performance, the KDC comes configured to optimize its scan engine technology. Unless you clearly understand the impact of your changes to the KDC settings, please do not change factory default settings.

10.1 Symbologies

KOAMTAC's KDC products support most major barcode symbologies including 1D, 2D, Postal, and OCR-Fonts. Below is the list of the barcode symbologies supported by the KDC with respect to each model's particular area of support. To ensure superior scan performance, remember to select only the required symbologies.

KDC20/100/200/250/270L/270D/350L/ 410/411/415/470L/470D/500L		KDC30/270C/300/350C/420/421/ 425/450/470C/500C
1D Barcodes	EAN13, EAN8, UPCA, UPCE, Bookland EAN, EAN13 with Addon, EAN8 with Add-on, UPCA with Add-on, UPCE with Add-on, Interleave 2 of 5, ITF14, Code128, Codabar, GS1-128, Code39, Code93, & Code35	Codabar, Code11, Code32, Code39, Code128, EAN8, EAN13, GS1-128, I2of5, MSI, Plessey, PosiCode, GS1 DATABAR OMNI, GS1 Limited, GS1 Expanded, S2of5IA, S2of5ID, TLC39, Telepen, Trioptic, UPCA, & UPCE
2D Barcodes	N/A	AztecCode, AztecRunes, CodablockF, Code 16K, Code49, DataMatrix, MaxiCode, MicroPDF, PDF417, & QRCode and HanXin Code
Postal Barcodes	N/A	AusPost, MayadaPost, ChinaPost, JapanPost, KoreaPost, KixPost, Planet Code, Postnet (US), & UKPost
OCR Fonts	N/A	OCR-A, OCR-B, OCRUSCurrency, OCRCMICRE13B, & OCRSEMIFONT

Table 7 - Symbologies Supported by KDC

Bookland EAN vs. EAN-13

Bookland EAN, which includes ISBN, ISSN, and ISMN, is supported by the KDC. This group of symbologies is essentially an EAN-13 barcode with fixed prefixes; 977 for ISSN, 978 for ISBN, and 979 for ISMN. If EAN-13 and Bookland EAN are both enabled, Bookland EAN takes precedence.

Bookland EAN does not have any options. The Bookland EAN barcode does not contain any groupings – that is, there are no hyphens or separators. Thus, the ISBN 957-630-239-0 is transmitted as 9576302390.

Add-on Symbologies

By default, the 2 or 5 digit add-on symbols with a UPCE, UPCA, EAN-8, and EAN-13 barcode are neither decoded nor transmitted. Transmission for these specific symbologies is enabled by setting the appropriate *withAddon* options. There are 4 *withAddon* options, one for each symbology:

- **UPCEwithAddon**
- **UPCAwithAddon**
- **EAN8withAddon**
- **EAN13withAddon**

The decoding of add-on symbols are defined by the following table, which explains the process for EAN-13 symbols.

Mode	Behavior	Value of flags	
Auto-discrimination	If add-on symbol is present, then it is also decoded; otherwise, only the EAN-13 symbol is decoded.	true	true
With add-on	Only EAN-13 barcodes with 2 or 5 add-on symbols are decoded.	false	true
Without add-on	The add-on symbol is ignored.	true	false

Table 8 - Add-on for EAN-13 Symbology

The add-on symbol is appended to the EAN-13 barcode. The process is similar for UPCE, UPCA, and EAN-8 barcodes. Note that all the UPCE, UPCA, EAN-8, and EAN-13 formatting and conversion options are in effect. The following table should help explain the effect of various options for EAN-8 barcode 12345670 + 12.

Barcode	EAN8_as_EAN13	EAN8_ReturnCheckDigit	EAN13_ReturnCheckDigit
1234567012	False	True	N/A
123456712		False	
00000123456712	True	N/A	False
000001234567012			True

Table 9 - Add-on for EAN-8 Symbology

The add-on symbol contains neither a check digit nor a terminating guard band. Every effort has been made to reduce the decoding error; however, it is likely to decode a partial scan of a 5-digit add-on symbol as a 2-digit add-on symbol. It is strongly recommended that the minimum security level be set at 2 while decoding add-on symbols. Since the decoder takes a conservative view on the add-on symbols, it is likely that the add-on symbol will be missed in the auto-discrimination mode. Auto-discrimination mode should then be avoided.

10.2 Code Options

(KDC20/100/200/250/270L/270D/410/411/415/470L/470D)

The KDC supports the following barcode options:

- Transmission of start and stop characters
- Reverse direction
- Symbology conversion
- Verification of optional check character
- Transmission of check digit
- Transmission of Start and Stop Characters

For Codabar symbols, the user may choose not to transmit the start and stop symbols, the NOTIS Editing. By default, they are transmitted. Setting the field **CodaBar_NoStartStopChars** to true disables the transmission.

Reverse Direction

This option may be selected if direction oriented symbologies are designated, such as Code35.

Symbology Conversion

By default the EAN-8, UPCE, and UPCA symbols are transmitted in their native format. However, it is possible to show them in a different format. The user may choose to display UPCE symbols as either UPC-A or EAN-13 symbols, EAN-8 symbols as EAN-13 symbols, or UPC-A symbols as EAN-13 symbols. The following table shows the effect of setting various options.

Option	EAN-8	UPC-A	UPC-E	All others
EAN8_as_EAN13	Converted to EAN-13	No effect	No effect	No effect
UPCA_as_EAN13	No effect	Converted to EAN-13	No effect	
UPCE_as_EAN13	No effect	No effect	Converted to EAN-13	
UPCE_as_UPCA	No effect	No effect	Converted to UPC-A	

Table 10 - Symbology Conversion

Verification of Optional "Check Digit"

Code39 and Interleave 2 of 5 have an optional check digit, which, by default, is not verified. Changing the option **VerifyCheckDigit** to true may enable their verification, or the user may enable the verification for individual symbologies. If the check digit verification fails, the barcode is not transmitted.

Option Selected	Verify Code39 check digit	Verify I2of5 check digit
VerifyCheckDigit	Yes	Yes
Code39_VerifyCheckDigit	Yes	No effect
I2of5_VerifyCheckDigit	No effect	Yes

Table 11 - Verification of Optional "Check Digit"

Transmission of "Check Digit"

By default, the check digit – optional or mandatory – is not transmitted. Its transmission may be enabled for all symbologies by enabling **ReturnCheckDigit** option.

Option Selected		Is the check digit returned?				
ReturnCheckDigit	Yes	Yes	Yes	Yes	Yes	Yes
EAN13_ReturnCheckDigit	Yes	No effect	No effect	No effect	No effect	No effect
EAN8_ReturnCheckDigit	No effect	Yes	No effect	No effect	No effect	No effect
UPCA_ReturnCheckDigit	No effect	No effect	Yes	No effect	No effect	No effect
UPCE_ReturnCheckDigit	No effect	No effect	No effect	Yes	No effect	No effect
Code39_ReturnCheckDigit	No effect	No effect	No effect	No effect	Yes	No effect
I2of5_ReturnCheckDigit	No effect	No effect	No effect	No effect	No effect	Yes

Table 12 - Transmission of "Check Digit"

Resolution of Inconsistencies

Three types of inconsistencies could arise in the assignment of symbology options. The decoder has pre-defined strategies to resolve these inconsistencies: If **UPCE_as_EAN13** is true, then **UPCE_as_UPCA** is ignored.

If symbology conversion is selected but the target symbology is not enabled, then the decoder still outputs the symbol in the target symbology. For example, suppose UPC-E is enabled and **UPCE_as_EAN13** is true but EAN-13 is disabled. All UPC-E symbols will be shown as EAN-13 and EAN-13 options (if specified) will be applied. For the two symbologies that have optional check digits, Code39 and Interleave 2 of 5, the decoder will always transmit the check digit if the verification is disabled.

Verify Check Digit	Return Check Digit	Description
Disabled	Enabled or Disabled	Check digit is not verified but is transmitted
Enabled	Disabled	Check digit is verified but is not transmitted
Enabled	Enabled	Check digit is verified and is transmitted

Table 13 - Resolution of Inconsistencies

10.3 Miscellaneous Barcode Information

Height of a Linear Barcode

Industry standards suggest a height of either 6.5mm or 15% of the symbol length, whichever is greater. Symbols of less than recommended heights may cause recognition problems.

Check Characters

Yes, we recommend the use of check-characters in barcodes. Operating without check-characters is not safe and will lead to errors that are costly to correct. Using check-characters positively affects data integrity, especially when character density is at the limits and/or image quality is not at its best.

Prevent Interleave 2 of 5 Partial Reading

A partial scan of an Interleave 2 of 5 symbols may decode and cause incorrect data to be read. To prevent partial scans on long symbols, the user should include bearer bars. These bars run along the top and bottom edges of the barcode in the scanning direction. If a partial scan of the barcode occurs, the scanning beam will hit the bearer bar and will not decode. The bearer bar must touch the top and bottom of all the bars and must be at least 3 times as wide.

Another solution for the short scanning problem is to fix all Interleave 2 of 5 symbols to a set number of digits. Zeros may be used to pad the data to the set number of digits. The application program would then be set to only accept scans of the correct number of digits.

Finally, a check digit may be used. The Interleave 2 of 5 symbology has an optional check character that uses a weighted Modulo 10 scheme. The check character is the last character in the symbol and should be checked by the decoder and then transmitted with the data. Since Interleave 2 of 5 must always have an even number of digits, the leftmost character may need to be a zero when the check character is added. The standard check digit is calculated by assigning alternating 3,1,3,1... weights to respective data digits. These weights are then multiplied by their respective data digits and the products are summed. The check digit is the digit that needs to be added to the sum to make it an even multiple of 10. An example would be if the sum of the products was 37, then the check digit would be 3.

Equation to Determining Potential Number of Stored Barcodes

The number of barcodes that may be stored in the KDC memory depends on the size of the barcodes.

Example: In case of EAN-13, it takes up 20 bytes. The maximum number of EAN-13 barcodes that may be saved is $STORAGE_SIZE/20$. For example, in case of 4MB, it may store maximum 204,800 barcodes and in case of 8MB, it may store maximum 409,600 barcodes.

Data Buffer Full

When the data buffer is full, the KDC displays a message, **Buffer Full**, ignoring any command to scan barcodes. The user must reset the data buffer to continue data collection.

11. Appendix B –FAQ

11.1 Symbology

Q: What barcode symbologies are supported by the KDC?

A: The KDC20/100/200/250/270L/270D/350L/410/411/415/470L/470D/500L support 1D barcode only. KDC30/270C/300/350C/420/421/425/450/470C/500C support most major 1D, 2D barcode symbologies and OCR.

**KDC30/270C/300/350C/420/421/
425/450/470C/500C**

2D Barcodes

AztecCode, AztecRunes, CodablockF, Code16K, Code49, DataMatrix, MaxiCode, MicroPDF, PDF417, QRCode, and HanXin Code

1D Barcodes

Codabar, Code11, Code32, Code39, Code128, EAN8, EAN13, GS1-128, I2of5, MSI, Plessey, PosiCode, GS1 DATABAR OMNI, GS1 Limited, GS1 Expanded, S2of5IA, S2of5ID, TLC39, Telepen, Trioptic, UPCA, and UPCE

Postal Barcodes

AusPost, CanadaPost, ChinaPost, JapanPost, KoreaPost, KixPost, Planet Code, Postnet (US), and UKPost

OCR Fonts

OCR-A, OCR-B, OCRPassport,

**KDC20/100/200/250/270L/270D/350L/
410/411/415/470L/470D/500L**

1D Barcodes

EAN13

EAN8

UPCA

UPCE

Bookland EAN

EAN13 with Add-on

EAN8 with Add-on

UPCA with Add-on

UPCE with Add-on

Interleave 2 of 5

ITF14

Code128

Codabar

GS1-128

Code39

Code93

Code35

Table 15 – Symbologies supported by KDC

11.2 Host Interface

Q: What interface ports are supported by the KDC?

A: The KDC100 has two USB ports: Swing-out Type A and Ultra-mini USB ports that support USB to Serial protocol. KDC200/250/300/350/400(except KDC470) have one Ultra-mini USB port that supports USB to Serial protocol and Bluetooth that supports HID/SPP/MFi *Bluetooth* profiles. KDC270 and KDC470 have one Micro USB port. KDC20/30 have one Swing-out Type A USB port which supports USB to Serial protocol and Bluetooth with HID, SPP and MFi *Bluetooth* profiles. KDC500 has one micro USB port that supports USB to Serial protocol and Bluetooth that supports SPP/MFi *Bluetooth* profile.

11.3 Battery

Q: How long will the KDC battery last before it needs to be replaced?

A: The battery on the KDC may be charged at least 300 times before it needs to be replaced.

Q: How long does it take to charge the KDC?

A: It takes about 2 hours to charge the KDC20/100/200, 4 hours to charge the KDC30/250/300/270, and 5 hours to charge the KDC350/400/470/500.

Q: How many barcodes may a fully charged KDC scan?

A: If the user scans a barcode every 1 seconds, KDC100/30 scans more than 12,000 barcodes, KDC20 scans more than 11,000 barcodes, KDC200 scans more than 8,500 barcodes, KDC250/270L/270D scans more than 33,000 scans, KDC270C/300 scans more than 22,000 scans and 2D models of KDC350/400/470/500 scan more than 40,000.

Q: How long will the KDC battery lasts in the sleep mode?

A: KDC100 lasts more than 75 days. KDC20/200 lasts more than 2 days while connected in Bluetooth and 60 days if not connected in Bluetooth. KDC250/270L/270D lasts 7 days while connected in Bluetooth and 120 days if not connected in Bluetooth. KDC30/270C/300 last more than 25 days while connected in Bluetooth and 5 days if not connected in Bluetooth. KDC350 lasts more than 12 hours while GPS is active and Bluetooth is connected, 7 days while GPS is not active and Bluetooth is connected, and 20 days while GPS is not active and Bluetooth is not connected. KDC410/415/420/425/430/470 last more than 8 days while connected in Bluetooth and 20 days while if not connected in Bluetooth. KDC450/470 lasts more than 4 hours while reading RFID tag continuously every second and Bluetooth is connected, 5 days if reading RFID tag casually and Bluetooth is connected. KDC500 lasts more 7 days while connected in Bluetooth and 10 days if not connected in Bluetooth.

Q: May I replace the KDC battery?

A: Yes. The KDC has a separate compartment for the battery that may be opened easily with a driver. KDC batteries may be purchased at store.koamtac.com or from local KDC reseller.

11.4 Memory

Q: How many barcodes may be stored in the KDC?

A: 4MB version of KDC100M/200M/250M/300M/350 may store maximum of 204,800 barcodes and 8MB version and KDC270/470 may store maximum of 409,600 barcodes . KDC20/30 have 150KB data memory which may store maximum 7,680 barcodes. KDC41x/42x has 80KB data memory and may store maximum 4,096 barcodes. KDC500 has 3MB data memory which may store maximum 153,600 barcodes.

Q: May I download stored barcodes or wedge barcodes to my application?

A: Yes. KTSync® is keyboard wedging, application generation, DB look up, and inventory program bundled with the KDC200/250/270/300/350, which supports host devices running on Android®, iPhone/iPad/iPod touch, Blackberry®, Windows® XP/Vista/7/8/10/Mobile 5.0+. KTSync® provides keyboard wedging program only for KDC20/30/400/470. KDC100 and KDC500 only supports Windows XP/Vista/7 version.

Q: Does the KDC support *Android*®, *iPhone/iPad/iPod touch*®, *Blackberry*®, *Mac*® and *Windows*® devices?

A: KTSync® currently supports Android®, iPhone/iPad/iPod touch, Blackberry®, Mac® and Windows® devices.

11.5 Programming

Q: May the KDC be programmed by a KOAMTAC partner?

A: Yes. KOAMTAC's Application Generation tool provides an enhanced programming environment for developing custom applications for the KDC.

1. KDC supports, at most, three step data collection processes, including the ability to perform various data functionality features.
2. KDC's database lookup function provides enhanced data processes, enabling the KDC to display database results with or without scanned barcode data.
3. KDC may display a message from the Host by enabling two-way communications and a messaging application.

Q: Does KOAMTAC provide customization services for the KDC?


A: Yes. Custom applications or projects may be developed by KOAMTAC engineers. This service is provided for an additional fee to KOAMTAC. For more information regarding this service, please contact KOAMTAC.

Q: May a partner develop a PC or Smartphone application for the KDC?


A: A software development kit for Windows® XP/Vista/7/8/10/Mobile 5.0+ and Android is available on KOAMTAC support page. Android®, iPhone/iPad/iPod touch, Blackberry®, and Mac® SDK are available through KOAMTAC authorized distributors.

12. Appendix C – 1D Special Barcodes (KDC20/100/200/250/270L/270D/350L/410/415/470L/ 470D)

12.1 Set Symbologies

Enable EAN13  2000001	Disable EAN13  2100001
Enable EAN8  2000002	Disable EAN8  2100002
Enable UPCA  2000004	Disable UPCA  2100004
Enable UPCE  2000008	Disable UPCE  2100008
Enable Code39  2000010	Disable Code39  2100010
Enable ITF14  2000020	Disable ITF14  2100020

Enable Code128	Disable Code128
 2000040	 2100040
Enable I2 of 5	Disable I2 of 5
 2000080	 2100080
Enable Codabar	Disable Codabar
 2000100	 2100100
Enable GS1-128	Disable GS1-128
 2000200	 2100200
Enable Code93	Disable Code93
 2000400	 2100400
Enable Code35	Disable Code35
 2000800	 2100800
Enable Bookland EAN	Disable Bookland EAN
 2001000	 2101000

Enable EAN13 with Addon  2002000	Disable EAN13 with Addon  2102000
Enable EAN8 with Addon  2004000	Disable EAN8 with Addon  2104000
Enable UPCA with Addon  2008000	Disable UPCA with Addon  2108000
Enable UPCE with Addon  2010000	Disable UPCE with Addon  2110000
Enable GS1 Omni  2020000	Disable GS1 Omni  2120000
Enable GS1 Limited  2040000	Disable GS1 Limited  2140000
Enable GS1 Expanded  2080000	Disable GS1 Expanded  2180000

12.2 Barcode Options

Codabar - do NOT transmit start/stop  3000000001	Codabar - transmit start/stop  3100000001
Convert UPCE to UPCA  3000000200	Do NOT convert UPCE to UPCA  3100000200
Convert EAN8 to EAN13  3000000400	Do NOT convert EAN8 to EAN13  3100000400
Convert UPCE to EAN13  3000000800	Do NOT convert UPCE to EAN13  3100000800
Return Check Digit  3000001000	Do NOT Return Check Digit  3100001000
Verify Check Digit  3000002000	Do NOT Verify Check Digit  3100002000
Convert UPCA to EAN13  300080000	Do NOT Convert UPCA to EAN13  310080000

Verify check digit for I2of5  3000400000	Do NOT verify check digit for I2of5  3100400000
Verify check digit for Code39  3000800000	Do NOT verify check digit for Code39  3100800000
Return check digit for I2of5  3004000000	Do NOT return check digit for I2of5  3104000000
Return check digit for Code39  3008000000	Do NOT return check digit for Code39  3108000000
Return check digit for UPCE  3010000000	Do NOT return check digit for UPCE  3110000000
Return check digit for UPCA  3020000000	Do NOT return check digit for UPCA  3120000000
Return check digit for EAN8  3040000000	Do NOT return check digit for EAN8  3140000000

Return check digit for EAN13



3080000000

Do NOT return check digit for EAN13



3180000000

12.3 Delete Last Scanned Barcode

Delete Last Scanned Barcode




80001

12.4 Scan Options

Wide Scan Angle*	Narrow Scan Angle*
 3000004000	 3100004000
Normal Filter Mode*	High Filter Mode*
 3100008000	 3000008000
Enable Auto Trigger	Disable Auto Trigger
 5A001	 5A010
Reread Delay = Continuous	Reread Delay = Short
 5B000	 5B001
Reread Delay = Medium	Reread Delay = Long
 5B002	 5B003
Reread Delay = Extra Long	
 5B004	

*Opticon laser only

12.5 Scan Timeout

Scan Timeout = 500msec  101F4	Scan Timeout = 1sec  103E8
Scan Timeout = 2sec  107D0	Scan Timeout = 3sec  10BB8
Scan Timeout = 4sec  10FA0	Scan Timeout = 5sec  11388
Scan Timeout = 6sec  11770	Scan Timeout = 7sec  11B58
Scan Timeout = 8sec  11F40	Scan Timeout = 9sec  12328
Scan Timeout = 10sec  12710	

12.6 Minimum Barcode Length

Minimum Length = 2  002	Minimum Length = 3  003
Minimum Length = 4  004	Minimum Length = 5  005
Minimum Length = 6  006	Minimum Length = 7  007
Minimum Length = 8  008	Minimum Length = 9  009
Minimum Length = 10  00A	Minimum Length = 11  00B
Minimum Length = 12  00C	Minimum Length = 13  00D
Minimum Length = 14  00E	Minimum Length = 15  00F

Minimum Length = 16  010	Minimum Length = 17  011
Minimum Length = 18  012	Minimum Length = 19  013
Minimum Length = 20  014	Minimum Length = 21  015
Minimum Length = 22  016	Minimum Length = 23  017
Minimum Length = 24  018	Minimum Length = 25  019
Minimum Length = 26  01A	Minimum Length = 27  01B
Minimum Length = 28  01C	Minimum Length = 29  01D

Minimum Length = 30	Minimum Length = 31
 01E	 01F
Minimum Length = 32	Minimum Length = 33
 020	 021
Minimum Length = 34	Minimum Length = 35
 022	 023
Minimum Length = 36	
 024	

12.7 ScanIfConnect

ScanIfConnect = Enable	ScanIfConnect = Disable
 5I001	 5I010

12.8 Security Level(Laser model only)

Security level = 1	Security level = 2
 41	 42
Security level = 3	Security level = 4
 43	 44

12.9 Data Process - Wedge/Store, Enter Key & Extend Key

<p>Wedge Only</p>  <p>82000</p>	<p>Wedge & Store Always</p>  <p>82001</p>
<p>Store Only</p>  <p>82002</p>	<p>Save if Sent</p>  <p>82003</p>
<p>Save if Not Sent</p>  <p>82004</p>	
<p>Enable Enter Key (KDC350L/D Only)</p>  <p>8E001</p>	<p>Disable Enter Key (KDC350L/D Only)</p>  <p>8E000</p>
<p>Enable Extend Key (KDC350L/D Only)</p>  <p>8X001</p>	<p>Disable Extend Key (KDC350L/D Only)</p>  <p>8X000</p>

12.10 Data Process - Data Edit

Start Prefix Enter  83000	Start Suffix Enter  83001
Finish Prefix/Suffix Enter  83002	Cancel Prefix/Suffix Enter  83003
Delete Prefix  83004	Delete Suffix  83005
Display Prefix  83006	Display Suffix  83007
AIM ID None  8B000	AIM ID In Prefix  8B001
AIM ID In Suffix  8B002	



12.11 Data Process - Data Format and Handshake

Data format = Barcode only  84001	Data format = Packet data  84010
Enable Handshake  86001	Disable Handshake  86010

12.12 Data Process - Termination Character & Duplicate Check

Termination Character = None  88000	Termination Character = CR  88001
Termination Character = LF  88002	Termination Character = CR+LF  88003
Termination Character = Tab  88004	
Enable Duplicate Check  89001	Disable Duplicate Check  89010

12.13 Data Process - Termination Character & Duplicate Check

Enable Bluetooth Power  60001	Disable Bluetooth Power  60010
Enter Pairing Mode  61001	
Enable Discovering  61101	Disable Discovering  61110
Connect To Last  61201	Connecting to  61301
Disconnect  6D000	
HID Sync  6E000	SPP Sync  6E001
Bluetooth Profile = SPP  6A000	Bluetooth Profile = HID iOS  6A001

Bluetooth Profile = MFi  6A002	Bluetooth Profile = SPP2.0  6A003
Bluetooth Profile = HID Normal  6A004	
Enable Auto Connect  62001	Disable Auto Connect  62010
Enable Auto Reconnect  6R001	Disable Auto Reconnect  6R010
Enable Auto Power On  66001	Disable Auto Power On  66010
Enable Auto Power Off  64001	Disable Auto Power Off  64010
Enable Beep Warning  68001	Disable Beep Warning  68010

Enable Power Off Msg	Disable Power Off Msg
 63001	 63010
Display BT MAC Address	Display BT FW Version
 63100	 63200
Enable Wakeup Nulls	Disable Wakeup Nulls
 63401	 63410
Enable BT Toggle	Disable BT Toggle
 6B001	 6B010
Enable BT Disconnect Button	Disable BT Disconnect Button
 6B101	 6B110
Enable Auto Pairing	Disable Auto Pairing
 6N001	 6N010

12.14 Bluetooth Auto Power On Time

Auto Power On Time = Disabled  67000	Auto Power On Time = 1sec  67001
Auto Power On Time = 2sec  67002	Auto Power On Time = 3sec  67003
Auto Power On Time = 4sec  67004	Auto Power On Time = 5sec  67005
Auto Power On Time = 6sec  67006	Auto Power On Time = 7sec  67007
Auto Power On Time = 8sec  67008	Auto Power On Time = 9sec  67009
Auto Power On Time = 10sec  6700A	

12.15 Bluetooth Power Off Time

BT Power Off Time = 1min  69001	BT Power Off Time = 2min  69002
BT Power Off Time = 3min  69003	BT Power Off Time = 4min  69004
BT Power Off Time = 5min  69005	BT Power Off Time = 6min  69006
BT Power Off Time = 7min  69007	BT Power Off Time = 8min  69008
BT Power Off Time = 9min  69009	BT Power Off Time = 10min  6900A
BT Power Off Time = 11min  6900B	BT Power Off Time = 12min  6900C
BT Power Off Time = 13min  6900D	BT Power Off Time = 14min  6900E

BT Power Off Time = 15min  6900F	BT Power Off Time = 16min  69010
BT Power Off Time = 17min  69011	BT Power Off Time = 18min  69012
BT Power Off Time = 19min  69013	BT Power Off Time = 20min  69014
BT Power Off Time = 21min  69015	BT Power Off Time = 22min  69016
BT Power Off Time = 23min  69017	BT Power Off Time = 24min  69018
BT Power Off Time = 25min  69019	BT Power Off Time = 26min  6901A
BT Power Off Time = 27min  6901B	BT Power Off Time = 28min  6901C

BT Power Off Time = 29min




6901D

BT Power Off Time = 30min



6901E

12.16 HID Auto Lock Time

HID Auto Lock Time = 0min (Never)  6C000	HID Auto Lock Time = 1min  6C001
HID Auto Lock Time = 2min  6C002	HID Auto Lock Time = 3min  6C003
HID Auto Lock Time = 4min  6C004	HID Auto Lock Time = 5min  6C005
HID Auto Lock Time = 10min  6C00A	HID Auto Lock Time = 15min  6C00F

12.17 HID Keyboard

HID Keyboard = US  6F000	HID Keyboard = German  6F001
HID Keyboard = French  6F002	HID Keyboard = Italian  6F003
HID Keyboard = Spanish  6F004	

12.18 HID Initial Delay

HID Initial Delay = Disabled  H0000	HID Initial Delay = 1second  H0001
HID Initial Delay = 2seconds  H0002	HID Initial Delay = 3seconds  H0003
HID Initial Delay = 5seconds  H0005	HID Initial Delay = 10seconds  H000A

12.19 HID Character Delay

HID Character Delay = Disabled  H1000	HID Character Delay = 10msec  H100A
HID Character Delay = 20msec  H1014	HID Character Delay = 30msec  H101E
HID Character Delay = 50msec  H1032	HID Character Delay = 100msec  H1064


12.20 HID Control Character

HID Control Character = Disabled  H2000	HID Control Character = Alt+Numpad  H2001
HID Control Character = ^+Character  H2002	HID Control Character = Replace with ' '  H2003

12.21 System

* Note 1. 4M Model Only

* Note 2. 8M Model Only

Memory Size = 0.5M / 3.5M ^{Note1,2}  5E000	Memory Size = 1M / 3M ^{Note1,2}  5E001
Memory Size = 2M / 2M ^{Note1,2}  5E002	Memory Size = 3M / 1M ^{Note1,2}  5E003
Memory Size = 4M / 0M ^{Note1,2}  5E004	Confirm Memory Size Change ^{Note1,2}  5E100
Memory Size = 5M / 3M ^{Note2}  5E005	Memory Size = 6M / 2M ^{Note2}  5E006
Memory Size = 7M / 1M ^{Note2}  5E007	Memory Size = 8M / 0M ^{Note2}  5E008
Memory Status  50001	Reset Memory  50002

Erase Memory  50003	Reset App data  50004
Reset BT Registry  50005	
Enable Auto Erase  5F001	Disable Auto Erase  5F010
Date/Time  52001	Battery  53001
Display Version  54001	
Lock Button  55001	Unlock Button  55010
Enable Beep Sound  56001	Disable Beep Sound  56010

High Beep Volume	Low Beep Volume
 5D001	 5D010
Enable Auto Menu Exit	Disable Auto Menu Exit
 58001	 58010
Enable MF1 Mode	Disable MF1 Mode
 6M001	 6M010
Enable Vibrator	Disable Vibrator
 5G001	 5G010
Scan Success = No vibration	Scan Success = 1 vibration
 5S000	 5S001
Scan Success = 2 vibrations	Scan Success = 3 vibrations
 5S002	 5S003
Scan Success = 4 vibrations	Scan Success = 5 vibrations
 5S004	 5S005


Scan Failure = No vibration  5S200	Scan Failure = 1 vibration  5S201
Scan Failure = 2 vibrations  5S202	Scan Failure = 3 vibrations  5S203
Scan Failure = 4 vibrations  5S204	Scan Failure = 5 vibrations  5S205
Enable Port Status  58101	Disable Port Status  58100
Display Format = Time & Battery  58200	Display Format = Type & Time  58201
Display Format = Type & Battery  58202	Display Format = Memory Status  58203
Display Format = GPS Data (GPS Model)  58204	Display Format = Barcode Only  58205

Display Format = Graphic	
 58206	
Enable Scrolling	Disable Scrolling
 59001	 59010
Factory Default	KDC Reset
 57001	 A0000
Enable Backup Battery (KDC20/20D Only)	Disable Backup Battery (KDC20/20D Only)
 5R001	 5R010

12.22 Sleep Timeout

Sleep Timeout = Disable  51000	Sleep Timeout = 1sec  51001
Sleep Timeout = 2sec  51002	Sleep Timeout = 3sec  51003
Sleep Timeout = 4sec  51004	Sleep Timeout = 5sec  51005
Sleep Timeout = 10sec  5100A	Sleep Timeout = 20sec  51014
Sleep Timeout = 30sec  5101E	Sleep Timeout = 1min  5103C
Sleep Timeout = 2min  51078	Sleep Timeout = 5min  5112C
Sleep Timeout = 10min  51258	

12.23 ETC

Enable Reverse Direction	Disable Reverse Direction
 3000000002	 3100000002
Enable Verify check digit	Disable Verify check digit
 3002000000	 3102000000
Enable Return check digit	Disable Return check digit
 3001000000	 3101000000

12.24 Function


F1  7001	F2  7002
F3  7003	F4  7004
F5  7005	F6  7006
F7  7007	F8  7008
F9  7009	F10  700A
F11  700B	F12  700C

12.25 Number

0	1
 7130	 7131
2	3
 7132	 7133
4	5
 7134	 7135
6	7
 7136	 7137
8	9
 7138	 7139

12.26 Lower Case Alphabet

a  7161	b  7162
c  7163	d  7164
e  7165	f  7166
g  7167	h  7168
i  7169	j  716A
k  716B	l  716C
m  716D	n  716E

o  716E	p  7170
q  7171	r  7172
s  7173	t  7174
u  7175	v  7176
w  7177	x  7178
y  7179	z  717A

12.27 Upper Case Alphabet

A  7141	B  7142
C  7143	D  7144
E  7145	F  7146
G  7147	H  7148
I  7149	J  714A
K  714B	L  714C
M  714D	N  714E

O	P
 714F	 7150
Q	R
 7151	 7152
S	T
 7153	 7154
U	V
 7155	 7156
W	X
 7157	 7158
Y	Z
 7159	 715A

12.28 Control Character

BS  7108	TAB  7109
LF  710A	VT  710B
CR  710D	ESC  711B
Space  7120	DEL  717F
Shift + Tab  7111	

12.29 Symbol Character

!	"
7121	7122
#	\$
7123	7124
%	&
7125	7126
,	(
7127	7128
)	*
7129	712A
+	,
712B	712C
-	.
712D	712E

/	:
 712F	 713A
;	<
 713B	 713C
=	>
 713D	 713E
?	@
 713F	 7140
[\
 715B	 715C
]	^
 715D	 715E
-	'
 715F	 7160



{	
 717B	 717C
}	~
 717D	 717E
Start String	Stop String
 7201	 7210

- The user may compose a string up to 16 characters.
- A string would be composed by scanning the "Start-String", number/alphabet/special characters, and "Stop-String" special barcodes.
- The KDC will abort string composition if the user do not scan "Stop-String" in one minute after scanning "Start-String" and number/alphabet/special characters.

12.30 GPS (GPS Model Only)

Enable GPS Power  G0001	Disable GPS Power  G0010
Enable GPS Bypass Data  G1001	Disable GPS Bypass Data  G1010
Reset GPS Module  G2000	GPS Acquire Test  G2001
GPS Power Save Mode = Normal  G2002	GPS Power Save Mode = Power Saving  G2003
Enable GPS Auto Power Off  G3001	Disable GPS Auto Power Off  G3010

12.31 GPS/BT Auto Power Off Timeout

Auto Power Off = 0min (Disabled)  G4000	Auto Power Off = 5min  G4005
Auto Power Off = 10min  G400A	Auto Power Off = 20min  G4014
Auto Power Off = 30min  G401E	Auto Power Off = 60min  G403C
Auto Power Off = 120min  G4078	

12.32 NFC (NFC Model Only)

Enable NFC Power  N0001	Disable NFC Power  N0010
NFC Data Format = Data only  N1001	NFC Data Format = Packet data  N1000
UID Only = Enable  N3001	UID Only = Disable  N3000
New Data Format = Enable  N4001	New Data Format = Disable  N4010

12.33 USB Disk (M Model Only)

USB Serial Mode  U0000	USB Disk Mode  U0001
USB HID Mode  U0002	Format USB Disk  U1000
Data Format = Data  U2000	Data Format = Data, Time  U2001
Data Format = Data, Type  U2002	Data Format = Data, Time, Type  U2003

12.34 USB DM Button(KDC20/20D Only)

USB DM Button = Enable	USB DM Button = Disable
 5U001	 5U010

12.35 WiFi (WiFi Model Only)

Enable WiFi Power  S0001	Disable WiFi Power  S0010
Provisioning  S1000	Protocol = UDP  S2000
Protocol = TCP  S2001	Protocol = HTTP_GET  S2002
Protocol = HTTP_POST  S2003	Server URL  S4
Port Number  S5	Server Page  S6
Enable SSL  S7001	Disable SSL  S7010

Enable AutoConnect  S8001	Disable AutoConnect  S8010
AP SSID  S9	AP Passcode  SA
Connect  SB	Server IP  S3
Enable Send Stored  SC001	Disable Send Stored  SC010

12.36 Multilanguage

Disable(English Only)  5L000	English  5L001
	French  5L003
Italian  5L004	Spanish  5L005
Korean  5L006	Japanese  5L007

13. Appendix D – 2D Special Barcodes (KDC30/270C/300/350C/420/425/450/470C)

13.1 Set Symbologies

For KDC300/350C/420/425/450, please refer to Honeywell Adaptus® Technology enabled scanner user manual, such as 4600 or 4820.

13.2 Barcode Options

For KDC300/350C/420/425/450, please refer to Honeywell Adaptus® Technology enabled scanner user manual, such as 4600 or 4820.

13.3 Delete Last Scanned Barcode

Delete Last Scanned Barcode



TMKDC80001.

13.4 Scan Options

Enable Auto Trigger  τMKDC5A001.	Disable Auto Trigger  τMKDC5A010.
Reread Delay = Continuous  τMKDC5B000.	Reread Delay = Short  τMKDC5B001.
Reread Delay = Medium  τMKDC5B002.	Reread Delay = Long  τMKDC5B003.
Reread Delay = Extra Long  τMKDC5B004.	

13.5 Scan Timeout

Scan Timeout = 500msec  TMKDC101F4.	Scan Timeout = 1sec  TMKDC103E8.
Scan Timeout = 2sec  TMKDC107D0.	Scan Timeout = 3sec  TMKDC10BB8.
Scan Timeout = 4sec  TMKDC10FA0.	Scan Timeout = 5sec  TMKDC11388.
Scan Timeout = 6sec  TMKDC11770.	Scan Timeout = 7sec  TMKDC11B58.
Scan Timeout = 8sec  TMKDC11F40.	Scan Timeout = 9sec  TMKDC12328.
Scan Timeout = 10sec  TMKDC12710.	

13.6 Minimum Barcode Length (except KDC30)

Minimum Length = 2	Minimum Length = 3
 TMKDC002.	 TMKDC003.
Minimum Length = 4	Minimum Length = 5
 TMKDC004.	 TMKDC005.
Minimum Length = 6	Minimum Length = 7
 TMKDC006.	 TMKDC007.
Minimum Length = 8	Minimum Length = 9
 TMKDC008.	 TMKDC009.
Minimum Length = 10	Minimum Length = 11
 TMKDC00A.	 TMKDC00B.
Minimum Length = 12	Minimum Length = 13
 TMKDC00C.	 TMKDC00D.
Minimum Length = 14	Minimum Length = 15
 TMKDC00E.	 TMKDC00F.

<p>Minimum Length = 16</p>  <p>TMKDC010.</p>	<p>Minimum Length = 17</p>  <p>TMKDC011.</p>
<p>Minimum Length = 18</p>  <p>TMKDC012.</p>	<p>Minimum Length = 19</p>  <p>TMKDC013.</p>
<p>Minimum Length = 20</p>  <p>TMKDC014.</p>	<p>Minimum Length = 21</p>  <p>TMKDC015.</p>
<p>Minimum Length = 22</p>  <p>TMKDC016.</p>	<p>Minimum Length = 23</p>  <p>TMKDC017.</p>
<p>Minimum Length = 24</p>  <p>TMKDC018.</p>	<p>Minimum Length = 25</p>  <p>TMKDC019.</p>
<p>Minimum Length = 26</p>  <p>TMKDC01A.</p>	<p>Minimum Length = 27</p>  <p>TMKDC01B.</p>
<p>Minimum Length = 28</p>  <p>TMKDC01C.</p>	<p>Minimum Length = 29</p>  <p>TMKDC01D.</p>

Minimum Length = 30	Minimum Length = 31
 MKDC01E.	 MKDC01F.
Minimum Length = 32	Minimum Length = 33
 MKDC020.	 MKDC021.
Minimum Length = 34	Minimum Length = 35
 MKDC022.	 MKDC023.
Minimum Length = 36	
 MKDC024.	


13.7 Image Capture (except KDC30)

Capture Now	Enable Image Capture
 TMKDC90000.	 TMKDC91001.
Image Format = JPEG	Image Format = BMP
 TMKDC92006.	 TMKDC92008.
Pixel Depth = 1 bit per pixel	Pixel Depth = 8 bit per pixel
 TMKDC93001.	 TMKDC93008.

13.8 ScanIfConnect

ScanIfConnect = Enable	ScanIfConnect = Disable
 MKDC5I001.	 MKDC5I010.

13.9 Data Process - Wedge/Store, Enter Key & Extend Key

Wedge Only	Wedge & Store Always
 TMKDC82000.	 TMKDC82001.
Store Only	Save if Sent
 TMKDC82002.	 TMKDC82003.
Save if Not Sent	
 TMKDC82004.	
Enable Enter Key (KDC350C Only)	Disable Enter Key (KDC350C Only)
 TMKDC8E001.	 TMKDC8E000.
Enable Extend Key (KDC350C Only)	Disable Extend Key (KDC350C Only)
 TMKDC8X001.	 TMKDC8X000.
Enable Age Verification	Disable Age Verification
 TMKDC8V001.	 TMKDC8V000.

13.10 Data Process - Data Edit

Start Prefix Enter  TMKDC83000.	Start Suffix Enter  TMKDC83001.
Finish Prefix / Suffix Enter  TMKDC83002.	Cancel Prefix / Suffix Enter  TMKDC83003.
Delete Prefix  TMKDC83004.	Delete Suffix  TMKDC83005.
Display Prefix  TMKDC83006.	Display Suffix  TMKDC83007.
AIM ID None  TMKDC8B000.	AIM ID In Prefix  TMKDC8B001.
AIM ID In Suffix  TMKDC8B002.	



13.11 Data Process – Data Format & Handshake

Data format = Barcode only  TMKDC84001.	Data format = Packet data  TMKDC84010.
Enable Handshake  TMKDC86001.	Disable Handshake  TMKDC86010.

13.12 Data Process - Termination Character & Duplicate Check

Termination Character = None  TMKDC88000.	Termination Character = CR  TMKDC88001.
Termination Character = LF  TMKDC88002.	Termination Character = CR+LF  TMKDC88003.
Termination Character = Tab  TMKDC88004.	
Enable Duplicate Check  TMKDC89001.	Disable Duplicate Check  TMKDC89010.

13.13 Bluetooth

Enable Bluetooth Power  TMKDC60001.	Disable Bluetooth Power  TMKDC60010.
Enter Pairing Mode  TMKDC61001.	
Enable Discovering  TMKDC61101.	Disable Discovering  TMKDC61110.
Connect To Last  TMKDC61201.	Connect To  TMKDC61301.
Disconnect  TMKDC6D000.	
HID Sync  TMKDC6E000.	SPP Sync  TMKDC6E001.
Bluetooth Profile = SPP  TMKDC6A000.	Bluetooth Profile = HID iOS  TMKDC6A001.



Bluetooth Profile = MFi  TMKDC6A002.	Bluetooth Profile = SPP2.0  TMKDC6A003.
Bluetooth Profile = HID Normal  TMKDC6A004.	
Enable Auto Connect  TMKDC62001.	Disable Auto Connect  TMKDC62010.
Enable Auto Reconnect  TMKDC6R001.	Disable Auto Reconnect  TMKDC6R010.
Enable Auto Power Off  TMKDC64001.	Disable Auto Power Off  TMKDC64010.
Enable Auto Power On  TMKDC66001.	Disable Auto Power On  TMKDC66010.
Enable Beep Warning  TMKDC68001.	Disable Beep Warning  TMKDC68010.

Enable Power Off Msg	Disable Power Off Msg
 TMKDC63001.	 TMKDC63010.
Display BT Mac Address	Display BT FW Version
 TMKDC63100.	 TMKDC63200.
Enable Wakeup Nulls	Disable Wakeup Nulls
 TMKDC63401.	 TMKDC63410.
Enable BT Toggle	Disable BT Toggle
 TMKDC6B001.	 TMKDC6B010.
Enable BT Disconnect Button	Disable BT Disconnect Button
 TMKDC6B101.	 TMKDC6B110.
Enable Auto Pairing	Disable Auto Pairing
 TMKDC6N001.	 TMKDC6N010.

13.14 Bluetooth Auto Power On Time

Auto Power On Time = Disabled  TMKDC67000.	Auto Power On Time = 1sec  TMKDC67001.
Auto Power On Time = 2sec  TMKDC67002.	Auto Power On Time = 3sec  TMKDC67003.
Auto Power On Time = 4sec  TMKDC67004.	Auto Power On Time = 5sec  TMKDC67005.
Auto Power On Time = 6sec  TMKDC67006.	Auto Power On Time = 7sec  TMKDC67007.
Auto Power On Time = 8sec  TMKDC67008.	Auto Power On Time = 9sec  TMKDC67009.
Auto Power On Time = 10sec  TMKDC6700A.	

13.15 Bluetooth Power Off Time

BT Power Off Time = 1min  TMKDC69001.	BT Power Off Time = 2min  TMKDC69002.
BT Power Off Time = 3min  TMKDC69003.	BT Power Off Time = 4min  TMKDC69004.
BT Power Off Time = 5min  TMKDC69005.	BT Power Off Time = 6min  TMKDC69006.
BT Power Off Time = 7min  TMKDC69007.	BT Power Off Time = 8min  TMKDC69008.
BT Power Off Time = 9min  TMKDC69009.	BT Power Off Time = 10min  TMKDC6900A.
BT Power Off Time = 11min  TMKDC6900B.	BT Power Off Time = 12min  TMKDC6900C.
BT Power Off Time = 13min  TMKDC6900D.	BT Power Off Time = 14min  TMKDC6900E.

BT Power Off Time = 15min  TMKDC6900F.	BT Power Off Time = 16min  TMKDC69010.
BT Power Off Time = 17min  TMKDC69011.	BT Power Off Time = 18min  TMKDC69012.
BT Power Off Time = 19min  TMKDC69013.	BT Power Off Time = 20min  TMKDC69014.
BT Power Off Time = 21min  TMKDC69015.	BT Power Off Time = 22min  TMKDC69016.
BT Power Off Time = 23min  TMKDC69017.	BT Power Off Time = 24min  TMKDC69018.
BT Power Off Time = 25min  TMKDC69019.	BT Power Off Time = 26min  TMKDC6901A.
BT Power Off Time = 27min  TMKDC6901B.	BT Power Off Time = 28min  TMKDC6901C.

BT Power Off Time = 29min



TMKDC6901D.

BT Power Off Time = 30min



TMKDC6901E.

13.16 HID Auto Lock Time

HID Auto Lock Time = 0min (Never)  τMKDC6C000.	HID Auto Lock Time = 1min  τMKDC6C001.
HID Auto Lock Time = 2min  τMKDC6C002.	HID Auto Lock Time = 3min  τMKDC6C003.
HID Auto Lock Time = 4min  τMKDC6C004.	HID Auto Lock Time = 5min  τMKDC6C005.
HID Auto Lock Time = 10min  τMKDC6C00A.	HID Auto Lock Time = 15min  τMKDC6C00F.

13.17 HID Keyboard

HID Keyboard = US  TMKDC6F000.	HID Keyboard = German  TMKDC6F001.
HID Keyboard = French  TMKDC6F002.	HID Keyboard = Italian  TMKDC6F003.
HID Keyboard = Spanish  TMKDC6F004.	

13.18 HID Initial Delay

HID Initial Delay = Disabled  τMKDCH0000.	HID Initial Delay = 1second  τMKDCH0001.
HID Initial Delay = 2seconds  τMKDCH0002.	HID Initial Delay = 3seconds  τMKDCH0003.
HID Initial Delay = 5seconds  τMKDCH0005.	HID Initial Delay = 10seconds  τMKDCH000A.

13.19 HID Character Delay

HID Character Delay = Disabled  TMKDCH1000.	HID Character Delay = 10msec  TMKDCH100A.
HID Character Delay = 20msec  TMKDCH1014.	HID Character Delay = 30msec  TMKDCH101E.
HID Character Delay = 50msec  TMKDCH1032.	HID Character Delay = 100msec  TMKDCH1064.

13.20 HID Control Character

HID Control Character = Disabled  τMKDCH2000.	HID Control Character = Alt+Numpad  τMKDCH2001.
HID Control Character = ^+Character  τMKDCH2002.	HID Control Character = Replace with ' '  τMKDCH2003.

13.21 System

Memory Size = 0.5M / 3.5M ^{Note1,2}  TMKDC5E000.	Memory Size = 1M / 3M ^{Note1,2}  TMKDC5E001.
Memory Size = 2M / 2M ^{Note1,2}  TMKDC5E002.	Memory Size = 3M / 1M ^{Note1,2}  TMKDC5E003.
Memory Size = 4M / 0M ^{Note1,2}  TMKDC5E004.	Confirm memory size ^{Note1,2}  TMKDC5E100.
Memory Size = 5M / 3M ^{Note2}  TMKDC5E005.	Memory Size = 6M / 2M ^{Note2}  TMKDC5E006.
Memory Size = 7M / 1M ^{Note2}  TMKDC5E007.	Memory Size = 8M / 0M ^{Note2}  TMKDC5E008.
Memory Status  TMKDC50001.	Reset Memory  TMKDC50002.
Erase Memory  TMKDC50003.	Reset App data  TMKDC50004.

* Note 1. 4M Model Only

* Note 2. 8M Model Only

Reset BT Registry	
 TMKDC50005.	
Enable Auto Erase	Disable Auto Erase
 TMKDC5F001.	 TMKDC5F010.
Date/Time	Battery
 TMKDC52001.	 TMKDC53001.
Display Version	
 TMKDC54001.	
Lock Button	Unlock Button
 TMKDC55001.	 TMKDC55010.
Enable Beep Sound	Disable Beep Sound
 TMKDC56001.	 TMKDC56010.
High Beep Volume	Low Beep Volume
 TMKDC5D001.	 TMKDC5D010.

Enable MFi Mode  τMKDC6M001.	Disable MFi Mode  τMKDC6M010.
Enable Vibrator  τMKDC5G001.	Disable Vibrator  τMKDC5G010.
Scan Success = No vibration  τMKDC5S000.	Scan Success = 1 vibration  τMKDC5S001.
Scan Success = 2 vibrations  τMKDC5S002.	Scan Success = 3 vibrations  τMKDC5S003.
Scan Success = 4 vibrations  τMKDC5S004.	Scan Success = 5 vibrations  τMKDC5S005.
Scan Failure = No vibration  τMKDC5S200.	Scan Failure = 1 vibration  τMKDC5S201.
Scan Failure = 2 vibrations  τMKDC5S202.	Scan Failure = 3 vibrations  τMKDC5S203.




Scan Failure = 4 vibrations  TMKDC5S204.	Scan Failure = 5 vibrations  TMKDC5S205.
Enable Auto Menu Exit  TMKDC58001.	Disable Auto Menu Exit  TMKDC58010.
Enable Port Status  TMKDC58101.	Disable Port Status  TMKDC58100.
Display Format = Time & Battery  TMKDC58200.	Display Format = Type & Time  TMKDC58201.
Display Format = Type & Battery  TMKDC58202.	Display Format = Memory Status  TMKDC58203.
Display Format = GPS Data(GPS Model)  TMKDC58204.	Display Format = Barcode Only  TMKDC58205.
Display Format = Graphic  TMKDC58206.	

Enable Menu Barcode	Disable Menu Barcode
 TMKDC52401.	 TMKDC52410.
Enable Scrolling	Disable Scrolling
 TMKDC59001.	 TMKDC59010.
Factory Default	KDC Reset
 TMKDC57001.	 TMKDCA0000.


13.22 Sleep Timeout

Sleep Timeout = Disable  TMKDC51000.	Sleep Timeout = 1sec  TMKDC51001.
Sleep Timeout = 2sec  TMKDC51002.	Sleep Timeout = 3sec  TMKDC51003.
Sleep Timeout = 4sec  TMKDC51004.	Sleep Timeout = 5sec  TMKDC51005.
Sleep Timeout = 10sec  TMKDC5100A.	Sleep Timeout = 20sec  TMKDC51014.
Sleep Timeout = 30sec  TMKDC5101E.	Sleep Timeout = 1min  TMKDC5103C.
Sleep Timeout = 2min  TMKDC51078.	Sleep Timeout = 5min  TMKDC5112C.
Sleep Timeout = 10min  TMKDC51258.	


13.23 Function


F1  TMKDC7001.	F2  TMKDC7002.
F3  TMKDC7003.	F4  TMKDC7004.
F5  TMKDC7005.	F6  TMKDC7006.
F7  TMKDC7007.	F8  TMKDC7008.
F9  TMKDC7009.	F10  TMKDC700A.
F11  TMKDC700B.	F12  TMKDC700C.

13.24 Number



0	1
 TMKDC7130.	 TMKDC7131.
2	3
 TMKDC7132.	 TMKDC7133.
4	5
 TMKDC7134.	 TMKDC7135.
6	7
 TMKDC7136.	 TMKDC7137.
8	9
 TMKDC7138.	 TMKDC7139.

13.25 Lower Case Alphabet

a  TMKDC7161.	b  TMKDC7162.
c  TMKDC7163.	d  TMKDC7164.
e  TMKDC7165.	f  TMKDC7166.
g  TMKDC7167.	h  TMKDC7168.
j  TMKDC7169.	i  TMKDC716A.
k  TMKDC716B.	l  TMKDC716C.
m  TMKDC716D.	n  TMKDC716E.






<p>o</p>  <p>TMKDC716F.</p>	<p>p</p>  <p>TMKDC7170.</p>
<p>q</p>  <p>TMKDC7171.</p>	<p>r</p>  <p>TMKDC7172.</p>
<p>s</p>  <p>TMKDC7173.</p>	<p>t</p>  <p>TMKDC7174.</p>
<p>u</p>  <p>TMKDC7175.</p>	<p>v</p>  <p>TMKDC7176.</p>
<p>w</p>  <p>TMKDC7177.</p>	<p>x</p>  <p>TMKDC7178.</p>
<p>y</p>  <p>TMKDC7179.</p>	<p>z</p>  <p>TMKDC717A.</p>

13.26 Upper Case Alphabet

A  TMKDC7141.	B  TMKDC7142.
C  TMKDC7143.	D  TMKDC7144.
E  TMKDC7145.	F  TMKDC7146.
G  TMKDC7147.	H  TMKDC7148.
I  TMKDC7149.	J  TMKDC714A.
K  TMKDC714B.	L  TMKDC714C.
M  TMKDC714D.	N  TMKDC714E.

O	P
 MKDC714F.	 MKDC7150.
Q	R
 MKDC7151.	 MKDC7152.
S	T
 MKDC7153.	 MKDC7154.
U	V
 MKDC7155.	 MKDC7156.
W	X
 MKDC7157.	 MKDC7158.
Y	Z
 MKDC7159.	 MKDC715A.



13.27 Control Character

BS	TAB
 TMKDC7108.	 TMKDC7109.
LF	VT
 TMKDC710A.	 TMKDC710B.
CR	ESC
 TMKDC710D.	 TMKDC711B.
Space	DEL
 TMKDC7120.	 TMKDC717F.
Shift + Tab	
 TMKDC7111.	

13.28 Symbol Character

!	"
MKDC7121.	MKDC7122.
#	\$
MKDC7123.	MKDC7124.
%	&
MKDC7125.	MKDC7126.
'	(
MKDC7127.	MKDC7128.
)	*
MKDC7129.	MKDC712A.
+	,
MKDC712B.	MKDC712C.
-	.
MKDC712D.	MKDC712E.

/	:
 TMKDC712F.	 TMKDC713A.
;	<
 TMKDC713B.	 TMKDC713C.
=	>
 TMKDC713D.	 TMKDC713E.
?	@
 TMKDC713F.	 TMKDC7140.
[\
 TMKDC715B.	 TMKDC715C.
]	^
 TMKDC715D.	 TMKDC715E.
-	`
 TMKDC715F.	 TMKDC7160.

{	
 MKDC717B.	 MKDC717C.
}	~
 MKDC717D.	 MKDC717E.
Start String	Stop String
 MKDC7201.	 MKDC7210.

Note

- The user may compose a string up to 16 characters.
- A string would be composed by scanning the "Start-String", number/alphabet/special characters, and "Stop-String" special barcodes.
- The KDC will abort string composition if the user do not scan "Stop-String" in one minute after scanning "Start-String" and number/alphabet/special characters.

13.29 GPS (GPS Model Only)

Enable GPS Power	Disable GPS Power
 TMKDCG0001.	 TMKDCG0010.
Enable GPS Bypass Data	Disable GPS Bypass Data
 TMKDCG1001.	 TMKDCG1010.
Reset GPS Module	GPS Acquire Test
 TMKDCG2000.	 TMKDCG2001.
GPS Power Save Mode = Normal	GPS Power Save Mode = Power Saving
 TMKDCG2002.	 TMKDCG2003.
Enable GPS Auto Power Off	Disable GPS Auto Power Off
 TMKDCG3001.	 TMKDCG3010.

13.30 GPS/BT Auto Power Off Timeout

Auto Power Off = 0min (Disabled)  TMKDCG4000.	Auto Power Off = 5min  TMKDCG4005.
Auto Power Off = 10min  TMKDCG400A.	Auto Power Off = 20min  TMKDCG4014.
Auto Power Off = 30min  TMKDCG401E.	Auto Power Off = 60min  TMKDCG403C.
Auto Power Off = 120min  TMKDCG4078.	

13.31 NFC (NFC Model Only)

Enable NFC Power	Disable NFC Power
 τMKDCN0001.	 τMKDCN0010.
NFC Data Format = Data only	NFC Data Format = Packet data
 τMKDCN1001.	 τMKDCN1000.
UID Only = Enable	UID Only = Disable
 τMKDCN3001.	 τMKDCN3000.
New Data Format = Enable	New Data Format = Disable
 τMKDCN4001.	 τMKDCN4010.

13.32 UHF (UHF Model Only)

Enable UHF Power	Disable UHF Power
 +MKDCNU001.	 +MKDCNU000.
Power On Time = 500ms	Power On Time = 1 sec
 +MKDCNU101.	 +MKDCNU102.
Power On Time = 1.5 sec	Power On Time = 2 sec
 +MKDCNU103.	 +MKDCNU104.
Power On Time = 2.5 sec	Power On Time = 3 sec
 +MKDCNU105.	 +MKDCNU106.
Power On Time = 3.5 sec	Power On Time = 4 sec
 +MKDCNU107.	 +MKDCNU108.
Power On Time = 4.5 sec	Power On Time = 5 sec
 +MKDCNU109.	 +MKDCNU10A.
Power Off Time = 500ms	Power Off Time = 1 sec
 +MKDCNU201.	 +MKDCNU202.

Power Off Time = 1.5 sec  T MKDCNU203.	Power Off Time = 2 sec  T MKDCNU204.
Power Off Time = 2.5 sec  T MKDCNU205.	Power Off Time = 3 sec  T MKDCNU206.
Power Off Time = 3.5 sec  T MKDCNU207.	Power Off Time = 4 sec  T MKDCNU208.
Power Off Time = 4.5 sec  T MKDCNU209.	Power Off Time = 5 sec  T MKDCNU20A.
Power Level = 0  T MKDCNU400.	Power Level = 1  T MKDCNU401.
Power Level = 2  T MKDCNU402.	Power Level = 3  T MKDCNU403.
Power Level = 4  T MKDCNU404.	Power Level = 5  T MKDCNU405.

Power Level = 6  _{TMKDCNU406.}	Power Level = 7  _{TMKDCNU407.}
Data Format = Binary  _{TMKDCNU300.}	Data Format = Hexa Decimal  _{TMKDCNU301.}
Smart Hopping  _{TMKDCNUH.}	

13.33 USB Disk (M Model Only)

USB Serial Mode	USB Disk Mode
 τMKDCU0000.	 τMKDCU0001.
USB HID Mode	Format USB Disk
 τMKDCU0002.	 τMKDCU1000.
Data Format = Data	Data Format = Data,Time
 τMKDCU2000.	 τMKDCU2001.
Data Format = Data,Type	Data Format = Data,Time,Type
 τMKDCU2002.	 τMKDCU2003.

13.34 USB DM Button(KDC30 only)

USB DM Button = Enable	USB DM Button = Disable
 MKDC5U001.	 MKDC5U010.

13.35 WiFi (WiFi Model Only)

Enable WiFi Power	Disable WiFi Power
 TMKDCS0001.	 TMKDCS0010.
Provisioning	Protocol = UDP
 TMKDCS1000.	 TMKDCS2000.
Protocol = TCP	Protocol = HTTP_GET
 TMKDCS2001.	 TMKDCS2002.
Protocol = HTTP_POST	Server URL
 TMKDCS2003.	 TMKDCS4.
Port Number	Server Page
 TMKDCS5.	 TMKDCS6.
Enable SSL	Disable SSL
 TMKDCS7001.	 TMKDCS7010.
Enable AutoConnect	Disable AutoConnect
 TMKDCS8001.	 TMKDCS8010.

AP SSID	AP Passcode
 TMKDCS9.	 TMKDCSA.
Connect	Server IP
 TMKDCSB.	 TMKDCS3.
Enable Send Stored	Disable Send Stored
 TMKDCSC001.	 TMKDCSC010.

13.36 Multilanguage

Disable(English Only)  TMKDC5L000.	English  TMKDC5L001.
	French  TMKDC5L003.
Italian  TMKDC5L004.	Spanish  TMKDC5L005.
Korean  TMKDC5L006.	Japanese  TMKDC5L007.

14. APPENDIX E - MSR Special Barcodes (KDC415/425MSR)

14.1 KDC415MSR

Beep On Error	
No Beep On Error	Beep On Error
 M6000	 M6001
Data Format	
MSR Data Only	Packet data
 M1000	 M1001
Encrypt Mode	
Disabled	AES
 M2000	 M2001
Enable Track	
Enable Track1	Enable Track2
 M3001	 M3002

Enable Track3	
Disable Track	
Disable Track1	
M4001	
Disable Track3	
	
Track Separator	
Track Separator = None	
M5000	
Track Separator = Comma	
	
M5002	
Track Separator = CR	
	
M5004	
M5005	

Track Separator = CR+LF	Track Separator = Tab
 M5006	 M5007
AES Key Length	
AES Key Length = 128 bits  M8000	AES Key Length = 192 bits  M8001
AES Key Length = 256 bits  M8002	
MSR Card Type	
MSR Card Type = ISO  MA000	MSR Card Type = Other 1  MA001
MSR Card Type = AAMVA  MA002	

14.2 KDC425MSR


Beep On Error	
No Beep On Error	Beep On Error
 MKDCM6000.	 MKDCM6001.
Data Format	
MSR Data Only	Packet data
 MKDCM1000.	 MKDCM1001.
Encrypt Mode	
Disabled	AES
 MKDCM2000.	 MKDCM2001.
Enable Track	
Enable Track1	Enable Track2
 MKDCM3001.	 MKDCM3002.
Enable Track3	
 MKDCM3004.	

Disable Track	
Disable Track1  ↑MKDCM4001.	Disable Track2  ↑MKDCM4002.
Disable Track3  ↑MKDCM4004.	
Track Separator	
Track Separator = None  ↑MKDCM5000.	Track Separator = Space  ↑MKDCM5001.
Track Separator = Comma  ↑MKDCM5002.	Track Separator = Semi Colon  ↑MKDCM5003.
Track Separator = CR  ↑MKDCM5004.	Track Separator = LF  ↑MKDCM5005.
Track Separator = CR+LF  ↑MKDCM5006.	Track Separator = Tab  ↑MKDCM5007.


AES Key Length	
AES Key Length = 128 bits  ↑MKDCM8000.	AES Key Length = 192 bits  ↑MKDCM8001.
AES Key Length = 256 bits  ↑MKDCM8002.	
MSR Card Type	
MSR Card Type = ISO  ↑MKDCMA000.	MSR Card Type = Other 1  ↑MKDCMA001.
MSR Card Type = AAMVA  ↑MKDCMA002.	

15. Appendix F – 1D Special Barcodes (500L)


15.1 Set Symbologies

Enable EAN13  2000001	Disable EAN13  2100001
Enable EAN8  2000002	Disable EAN8  2100002
Enable UPCA  2000004	Disable UPCA  2100004
Enable UPCE  2000008	Disable UPCE  2100008
Enable Code39  2000010	Disable Code39  2100010
Enable ITF14  2000020	Disable ITF14  2100020

Enable Code128	Disable Code128
 2000040	 2100040
Enable I2 of 5	Disable I2 of 5
 2000080	 2100080
Enable Codabar	Disable Codabar
 2000100	 2100100
Enable GS1-128	Disable GS1-128
 2000200	 2100200
Enable Code93	Disable Code93
 2000400	 2100400
Enable Code35	Disable Code35
 2000800	 2100800
Enable Bookland EAN	Disable Bookland EAN
 2001000	 2101000

Enable EAN13 with Addon  2002000	Disable EAN13 with Addon  2102000
Enable EAN8 with Addon  2004000	Disable EAN8 with Addon  2104000
Enable UPCA with Addon  2008000	Disable UPCA with Addon  2108000
Enable UPCE with Addon  2010000	Disable UPCE with Addon  2110000
Enable GS1 Omni  2020000	Disable GS1 Omni  2120000
Enable GS1 Limited  2040000	Disable GS1 Limited  2140000
Enable GS1 Expanded  2080000	Disable GS1 Expanded  2180000

15.2 Barcode Options

Codabar - do NOT transmit start/stop  3000000001	Codabar - transmit start/stop  3100000001
Convert UPCE to UPCA  3000000200	Do NOT convert UPCE to UPCA  3100000200
Convert EAN8 to EAN13  3000000400	Do NOT convert EAN8 to EAN13  3100000400
Convert UPCE to EAN13  3000000800	Do NOT convert UPCE to EAN13  3100000800
Return Check Digit  3000001000	Do NOT Return Check Digit  3100001000
Verify Check Digit  3000002000	Do NOT Verify Check Digit  3100002000
Convert UPCA to EAN13  300080000	Do NOT Convert UPCA to EAN13  310080000

Verify check digit for I2of5  3000400000	Do NOT verify check digit for I2of5  3100400000
Verify check digit for Code39  3000800000	Do NOT verify check digit for Code39  3100800000
Return check digit for I2of5  3004000000	Do NOT return check digit for I2of5  3104000000
Return check digit for Code39  3008000000	Do NOT return check digit for Code39  3108000000
Return check digit for UPCE  3010000000	Do NOT return check digit for UPCE  3110000000
Return check digit for UPCA  3020000000	Do NOT return check digit for UPCA  3120000000
Return check digit for EAN8  3040000000	Do NOT return check digit for EAN8  3140000000

Return check digit for EAN13



3080000000

Do NOT return check digit for EAN13



3180000000

15.3 Delete Last Scanned Barcode

Delete Last Scanned Barcode




80001

15.4 Scan Options

Enable Auto Trigger  5A001	Disable Auto Trigger  5A010
Reread Delay = Continuous  5B000	Reread Delay = Short  5B001
Reread Delay = Medium  5B002	Reread Delay = Long  5B003
Reread Delay = Extra Long  5B004	

15.5 Scan Timeout

Scan Timeout = 500msec  101F4	Scan Timeout = 1sec  103E8
Scan Timeout = 2sec  107D0	Scan Timeout = 3sec  10BB8
Scan Timeout = 4sec  10FA0	Scan Timeout = 5sec  11388
Scan Timeout = 6sec  11770	Scan Timeout = 7sec  11B58
Scan Timeout = 8sec  11F40	Scan Timeout = 9sec  12328
Scan Timeout = 10sec  12710	

15.6 Minimum Barcode Length

Minimum Length = 2  002	Minimum Length = 3  003
Minimum Length = 4  004	Minimum Length = 5  005
Minimum Length = 6  006	Minimum Length = 7  007
Minimum Length = 8  008	Minimum Length = 9  009
Minimum Length = 10  00A	Minimum Length = 11  00B
Minimum Length = 12  00C	Minimum Length = 13  00D
Minimum Length = 14  00E	Minimum Length = 15  00F


Minimum Length = 16  010	Minimum Length = 17  011
Minimum Length = 18  012	Minimum Length = 19  013
Minimum Length = 20  014	Minimum Length = 21  015
Minimum Length = 22  016	Minimum Length = 23  017
Minimum Length = 24  018	Minimum Length = 25  019
Minimum Length = 26  01A	Minimum Length = 27  01B
Minimum Length = 28  01C	Minimum Length = 29  01D

Minimum Length = 30	Minimum Length = 31
 01E	 01F
Minimum Length = 32	Minimum Length = 33
 020	 021
Minimum Length = 34	Minimum Length = 35
 022	 023
Minimum Length = 36	
 024	

15.7 ScanIfConnect

ScanIfConnect = Enable	ScanIfConnect = Disable
 5I001	 5I010

15.8 Data Process - Wedge/Store, Enter Key & Extend Key

Wedge Only  82000	Wedge & Store Always  82001
Store Only  82002	Save if Sent  82003
Save if Not Sent  82004	
Enable Enter Key  8E001	Disable Enter Key  8E000
Enable Extend Key  8X001	Disable Extend Key  8X000

15.9 Data Process - Data Edit

Start Prefix Enter  83000	Start Suffix Enter  83001
Finish Prefix/Suffix Enter  83002	Cancel Prefix/Suffix Enter  83003
Delete Prefix  83004	Delete Suffix  83005
Display Prefix  83006	Display Suffix  83007
AIM ID None  8B000	AIM ID In Prefix  8B001
AIM ID In Suffix  8B002	




15.10 Data Process - Data Format

Data format = Barcode only  84001	Data format = Packet data  84010
--------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------

15.11 Data Process - Termination Character & Duplicate Check

Termination Character = None  88000	Termination Character = CR  88001
Termination Character = LF  88002	Termination Character = CR+LF  88003
Termination Character = Tab  88004	
Enable Duplicate Check  89001	Disable Duplicate Check  89010


15.12 Bluetooth

Enable Bluetooth Power  60001	Disable Bluetooth Power  60010
Enter Pairing Mode  61001	
Disconnect  6D000	
Enable Auto Pairing  6N001	Disable Auto Pairing  6N010
Bluetooth Profile = SPP  6A000	Bluetooth Profile = MFi  6A002
Enable Auto Reconnect  6R001	Disable Auto Reconnect  6R010
Display BT MAC Address  63100	Display BT FW Version  63200

15.13 System

Memory Status  50001	Reset Memory  50002
Enable Auto Erase  5F001	Disable Auto Erase  5F010
Battery  53001	
Display Version  54001	Serial Number  54002
Enable Beep Sound  56001	Disable Beep Sound  56010
Enable Power On Beep  56101	Disable Power On Beep  56110
Enable BeepOnConnect  56201	Disable BeepOnConnect  56210

Enable Beep On Scan	Disable Beep On Scan
 56301	 56310
Enable BeepOnMSCard	Disable BeepOnMSCard
 56401	 56410
Enable BeepOnICCard	Disable BeepOnICCard
 56501	 56510
Enable BeepOnNFCCard	Disable BeepOnNFCCard
 56601	 56610
High Beep Volume	Low Beep Volume
 5D001	 5D010
Enable Auto Menu Exit	Disable Auto Menu Exit
 58001	 58010
Enable Port Status	Disable Port Status
 58101	 58100

Display Format = Time & Battery  58200	Display Format = Type & Time  58201
Display Format = Type & Battery  58202	Display Format = Memory Status  58203
Display Format = Barcode Only  58205	
Factory Default  57001	KDC Reset  A0000


15.14 Sleep Timeout

Sleep Timeout = Disable  51000	Sleep Timeout = 5sec  51005
Sleep Timeout = 10sec  5100A	Sleep Timeout = 20sec  51014
Sleep Timeout = 30sec  5101E	Sleep Timeout = 1min  5103C
Sleep Timeout = 2min  51078	Sleep Timeout = 5min  5112C
Sleep Timeout = 10min  51258	

15.15 NFC

Enable NFC Power	Disable NFC Power
 N0001	 N0010

15.16 MSR

Enable MSR Power  MB001	Disable MSR Power  MB010
No Beep On Error  M6000	Beep On Error  M6001
Enable Use Track1  M3001	Disable Use Track1  M4001
Enable Use Track2  M3002	Disable Use Track2  M4002
Enable Use Track3  M3004	Disable Use Track3  M4004
Enable Null Check Track1  M3101	Disable Null Check Track1  M4101
Enable Null Check Track2  M3102	Disable Null Check Track2  M4102

Enable Null Check Track3	Disable Null Check Track3
 M3104	 M4104
Enable Attach SS/ES	Disable Attach SS/ES
 M9001	 M9000
MSR Card Type = ISO	MSR Card Type = Other 1
 MA000	 MA001
MSR Card Type = AAMVA	MSR Card Type = JIS 2
 MA002	 MA003

15.17 ICCR(IC CARD READER)

Enable ICCR Power	Disable ICCR Power
 I0001	 I0010
IFD Number	Config Number
 I1000	 I1001

15.18 Key Management

Stored Keys	Inject Keys
 EK2000	 EK1000

15.19 Multilanguage

English	Korean
 5L001	 5L006
Japanese	

16. Appendix G – 2D Special Barcodes (KDC500C)

16.1 Set Symbologies

For KDC500C, please refer to Honeywell Adaptus® Technology enabled scanner user manual, such as 5600.

16.2 Barcode Options

For KDC500C, please refer to Honeywell Adaptus® Technology enabled scanner user manual, such as 5600.

16.3 Delete Last Scanned Barcode

Delete Last Scanned Barcode




MKDC80001.

16.4 Scan Options

Enable Auto Trigger	Disable Auto Trigger
 τMKDC5A001.	 τMKDC5A010.
Reread Delay = Continuous	Reread Delay = Short
 τMKDC5B000.	 τMKDC5B001.
Reread Delay = Medium	Reread Delay = Long
 τMKDC5B002.	 τMKDC5B003.
Reread Delay = Extra Long	
 τMKDC5B004.	

16.5 Scan Timeout

Scan Timeout = 500msec  TMKDC101F4.	Scan Timeout = 1sec  TMKDC103E8.
Scan Timeout = 2sec  TMKDC107D0.	Scan Timeout = 3sec  TMKDC10BB8.
Scan Timeout = 4sec  TMKDC10FA0.	Scan Timeout = 5sec  TMKDC11388.
Scan Timeout = 6sec  TMKDC11770.	Scan Timeout = 7sec  TMKDC11B58.
Scan Timeout = 8sec  TMKDC11F40.	Scan Timeout = 9sec  TMKDC12328.
Scan Timeout = 10sec  TMKDC12710.	

16.6 Minimum Barcode Length

Minimum Length = 2  TMKDC002.	Minimum Length = 3  TMKDC003.
Minimum Length = 4  TMKDC004.	Minimum Length = 5  TMKDC005.
Minimum Length = 6  TMKDC006.	Minimum Length = 7  TMKDC007.
Minimum Length = 8  TMKDC008.	Minimum Length = 9  TMKDC009.
Minimum Length = 10  TMKDC00A.	Minimum Length = 11  TMKDC00B.
Minimum Length = 12  TMKDC00C.	Minimum Length = 13  TMKDC00D.
Minimum Length = 14  TMKDC00E.	Minimum Length = 15  TMKDC00F.

<p>Minimum Length = 16</p>  <p>TMKDC010.</p>	<p>Minimum Length = 17</p>  <p>TMKDC011.</p>
<p>Minimum Length = 18</p>  <p>TMKDC012.</p>	<p>Minimum Length = 19</p>  <p>TMKDC013.</p>
<p>Minimum Length = 20</p>  <p>TMKDC014.</p>	<p>Minimum Length = 21</p>  <p>TMKDC015.</p>
<p>Minimum Length = 22</p>  <p>TMKDC016.</p>	<p>Minimum Length = 23</p>  <p>TMKDC017.</p>
<p>Minimum Length = 24</p>  <p>TMKDC018.</p>	<p>Minimum Length = 25</p>  <p>TMKDC019.</p>
<p>Minimum Length = 26</p>  <p>TMKDC01A.</p>	<p>Minimum Length = 27</p>  <p>TMKDC01B.</p>
<p>Minimum Length = 28</p>  <p>TMKDC01C.</p>	<p>Minimum Length = 29</p>  <p>TMKDC01D.</p>

Minimum Length = 30	Minimum Length = 31
 MKDC01E.	 MKDC01F.
Minimum Length = 32	Minimum Length = 33
 MKDC020.	 MKDC021.
Minimum Length = 34	Minimum Length = 35
 MKDC022.	 MKDC023.
Minimum Length = 36	
 MKDC024.	

16.7 ScanIfConnect

ScanIfConnect = Enable	ScanIfConnect = Disable
 MKDC5I001.	 MKDC5I010.

16.8 Data Process - Wedge/Store, Enter Key & Extend Key

Wedge Only  TMKDC82000.	Wedge & Store Always  TMKDC82001.
Store Only  TMKDC82002.	Save if Sent  TMKDC82003.
Save if Not Sent  TMKDC82004.	
Enable Enter Key  TMKDC8E001.	Disable Enter Key  TMKDC8E000.
Enable Extend Key  TMKDC8X001.	Disable Extend Key  TMKDC8X000.

16.9 Data Process - Data Edit

Start Prefix Enter  TMKDC83000.	Start Suffix Enter  TMKDC83001.
Finish Prefix / Suffix Enter  TMKDC83002.	Cancel Prefix / Suffix Enter  TMKDC83003.
Delete Prefix  TMKDC83004.	Delete Suffix  TMKDC83005.
Display Prefix  TMKDC83006.	Display Suffix  TMKDC83007.
AIM ID None  TMKDC8B000.	AIM ID In Prefix  TMKDC8B001.
AIM ID In Suffix  TMKDC8B002.	





16.10 Data Process – Data Format

Data format = Barcode only	Data format = Packet data
 MKDC84001.	 MKDC84010.

16.11 Data Process - Termination Character & Duplicate Check

Termination Character = None  TMKDC88000.	Termination Character = CR  TMKDC88001.
Termination Character = LF  TMKDC88002.	Termination Character = CR+LF  TMKDC88003.
Termination Character = Tab  TMKDC88004.	
Enable Duplicate Check  TMKDC89001.	Disable Duplicate Check  TMKDC89010.

16.12 Bluetooth

Enable Bluetooth Power  TMKDC60001.	Disable Bluetooth Power  TMKDC60010.
Enter Pairing Mode  TMKDC61001.	Connect To  TMKDC61301.
Disconnect  TMKDC6D000.	
Enable Auto Pairing  TMKDC6N001.	Disable Auto Pairing  TMKDC6N010.
Bluetooth Profile = SPP  TMKDC6A000.	Bluetooth Profile = MFi  TMKDC6A002.
Enable Auto Reconnect  TMKDC6R001.	Disable Auto Reconnect  TMKDC6R010.
Display BT Mac Address  TMKDC63100.	Display BT FW Version  TMKDC63200.



16.13 System

Memory Status  TMKDC50001.	Reset Memory  TMKDC50002.
Enable Auto Erase  TMKDC5F001.	Disable Auto Erase  TMKDC5F010.
Battery  TMKDC53001.	
Display Version  TMKDC54001.	Serial Number  TMKDC54002.
Enable Beep Sound  TMKDC56001.	Disable Beep Sound  TMKDC56010.
Enable Power On Beep  TMKDC56101.	Disable Power On Beep  TMKDC56110.
Enable Beep On Connect  TMKDC56201.	Disable Beep On Connect  TMKDC56210.

Enable Beep On Scan	Disable Beep On Scan
 TMKDC56301.	 TMKDC56310.
Enable BeepOnMSCard	Disable BeepOnMSCard
 TMKDC56401.	 TMKDC56410.
Enable BeepOnICCard	Disable BeepOnICCard
 TMKDC56501.	 TMKDC56510.
Enable BeepOnNFCCard	Disable BeepOnNFCCard
 TMKDC56601.	 TMKDC56610.
High Beep Volume	Low Beep Volume
 TMKDC5D001.	 TMKDC5D010.
Enable Auto Menu Exit	Disable Auto Menu Exit
 TMKDC58001.	 TMKDC58010.
Enable Port Status	Disable Port Status
 TMKDC58101.	 TMKDC58100.

Display Format = Time & Battery	Display Format = Type & Time
 TMKDC58200.	 TMKDC58201.
Display Format = Type & Battery	Display Format = Memory Status
 TMKDC58202.	 TMKDC58203.
Display Format = Barcode Only	
 TMKDC58205.	
Enable Menu Barcode	Disable Menu Barcode
 TMKDC52401.	 TMKDC52410.
Factory Default	KDC Reset
 TMKDC57001.	 TMKDCA0000.

16.14 Sleep Timeout

Sleep Timeout = Disable  TMKDC51000.	Sleep Timeout = 5sec  TMKDC51005.
Sleep Timeout = 10sec  TMKDC5100A.	Sleep Timeout = 20sec  TMKDC51014.
Sleep Timeout = 30sec  TMKDC5101E.	Sleep Timeout = 1min  TMKDC5103C.
Sleep Timeout = 2min  TMKDC51078.	Sleep Timeout = 5min  TMKDC5112C.
Sleep Timeout = 10min  TMKDC51258.	

16.15 NFC

Enable NFC Power	Disable NFC Power
 τMKDCN0001.	 τMKDCN0010.

16.16 MSR

Enable MSR Power  T MKDCMB001.	Disable MSR Power  T MKDCMB010.
No Beep On Error  T MKDCM6000.	Beep On Error  T MKDCM6001.
Enable Use Track1  T MKDCM3001.	Disable Use Track1  T MKDCM4001.
Enable Use Track2  T MKDCM3002.	Disable Use Track2  T MKDCM4002.
Enable Use Track3  T MKDCM3004.	Disable Use Track3  T MKDCM4004.
Enable Null Check Track1  T MKDCM3101.	Disable Null Check Track1  T MKDCM4101.
Enable Null Check Track2  T MKDCM3102.	Disable Null Check Track2  T MKDCM4102.

Enable Null Check Track3	Disable Null Check Track3
 _{TMKDCM3104.}	 _{TMKDCM4104.}
Enable Attach SS/ES	Disable Attach SS/ES
 _{TMKDCM9001.}	 _{TMKDCM9000.}
MSR Card Type = ISO	MSR Card Type = Other 1
 _{TMKDCMA000.}	 _{TMKDCMA001.}
MSR Card Type = AAMVA	MSR Card Type = JIS 2
 _{TMKDCMA002.}	 _{TMKDCMA003.}

16.17 ICCR(IC CARD READER)

Enable ICCR Power	Disable ICCR Power
 TMKDCI0001.	 TMKDCI0010.
IFD Number	Config Number
 TMKDCI1000.	 TMKDCI1001.

16.18 Key Management

Stored Keys	Inject Keys
 τMKDCEK2000.	 τMKDCEK1000.

16.19 Multilanguage

English	Korean
 TMKDC5L001.	 TMKDC5L006.
Japanese	

17. Appendix G – Multiple Special Barcodes

This chapter explains how to make a multiple configuration barcode for the KDC to configure multiple KDC settings by scanning one barcode. The KDC provides special barcodes that enable changes to the KDC configuration; but, this current barcode changes only one configuration. New KDC firmware VersionR_305 introduces a feature to enable the user to make one special barcode to change multiple KDC configurations.

17.1 KDC20/100/250/270L/270D/350L/410/411/415/470L/470D/500L

- Barcode type Code128 is used to make a single special barcode and its format is as follows:

<FNC3><Barcode String>

Here, the <FNC3> is a Code 128 control character and the <Barcode String> is an ASCII string for each KDC configuration.

- The multiple configuration Code128 barcode format is as follows and has a control character and series of barcode strings.

<FNC3><Barcode String 1>;;;;<Barcode String N>

Here, the <FNC3> is a Code 128 control character and the <Barcode String 1> and <Barcode String N> are an ASCII string for each KDC configuration. The ';' is a separator for each configuration's barcode string. Please see user manual for the <Barcode String> for KDC configuration.

- Example: Assume the user is changing the following configurations with one barcode.

- Change Wedge/Store to "Wedge Only" ➔ <FNC3>82000
- Change Termination Character to "None" ➔ <FNC3>88000
- Change Bluetooth "Auto PowerOff" to "Disabled" ➔ <FNC3>64010

<FNC3>82000;88000;64010

17.2 KDC30/270C/300/350C/420/421/425/450/470C/500C

- The following format is for a single configuration barcode format:

<SYN> M <CR> KDC <Barcode String>.

- <SYN> is a control character 0x16 in hex format.
- M is an ASCII character 0x4D in hex format.
- <CR> is a control character 0x0d in hex format.
- KDC is an ASCII string 0x4B 0x44 0x43 in hex format.
- <Barcode String> is an ASCII string for each configuration
- . is an ASCII string 0x2E in hex format that indicates the end of barcode.
- The multiple configuration barcode string uses a repeated barcode string of each configuration in the following format:

<SYN>M<CR>KDC<Barcode String 1> ;;;;;<Barcode String N> .

- <SYN> is a control character 0x16 in hex format.
- M is an ASCII character 0x4D in hex format.
- <CR> is a control character 0x0d in hex format.
- KDC is an ASCII string 0x4B 0x44 0x43 in hex format.
- <Barcode String1> and <Barcode String N> are an ASCII string for each configuration
- ; is a separator between each barcode strings.
- . is an ASCII string 0x2E in hex format that indicates the end of barcode.

- Example: Assume the user is changing the following configurations with one barcode.
 - Change Wedge/Store to "Wedge Only" ➔ <SYN>M<CR>KDC82000.
 - Change Termination Character to "None" ➔ <SYN>M<CR>KDC 88000.
 - Change Bluetooth "Auto PowerOff" to "Disabled" ➔ <SYN>M<CR>KDC 64010.

<SYN>M<CR>KDC82000;88000;64010.

- Code 128



- QR code



18. Appendix H – Power management

When the KDC is not in use, it enters sleep mode. In this state, the KDC consumes very little power to prolong battery life.

The KDC270/470 supports an additional power management feature called Hibernation mode. In this state, the KDC consumes even less power than when in sleep mode. This is because Hibernation mode is essentially in the same state as the power off state. The KDC will boot up faster from Hibernation mode in comparison to the power off state. This is because in Hibernation mode, the KDC skips initialization.



Press and hold the SCAN button for more than 3 seconds to boot from Hibernation mode or power off mode.

By default, the Hibernation mode is disabled. It can be enabled by scanning the barcodes below with selected timeouts.

18.1 1D – KDC270L/270D/470L/470D

Disabled  5P000	10 minutes  5P00A
15 minutes  5P00F	30 minutes  5P001E
45 minutes  5P02D	60 minutes  5P03C

18.2 2D – KDC30OP/KDC270C/470C

Disabled  τMKDC5P000.	10 minutes  τMKDC5P00A.
15 minutes  τMKDC5P00F.	30 minutes  τMKDC5P00E.
45 minutes  τMKDC5P02D.	60 minutes  τMKDC5P03C.

The following table shows the different power management modes of the KDC.

Mode	Description	Current consumption	Support Models
Power Off	<ul style="list-style-type: none"> KDC is not ready to use and all components are off It takes about 30 – 60 seconds to boot up before it can be used To power OFF the KDC, press and hold the SCAN + DOWN buttons for more than 3 seconds or Slide power switch off (KDC400 only). Or press and hold the both SCAN buttons for more than 3 seconds. (KDC500 only) 	< 10 uA	KDC20 KDC30 KDC350 KDC400 KDC270 KDC470 KDC500
Hibernation	<ul style="list-style-type: none"> KDC is not ready to use and all components are off. It takes 4 – 5 seconds to boot up before it can be used KDC transits into a hibernation mode from Power On or Sleep mode when the 	< 10 uA	KDC30OP KDC270 KDC470

	<p>timeout has occurred (10, 15, 30, 45 & 60 minutes)</p> <ul style="list-style-type: none"> Power on the KDC by pressing the SCAN button for 3 seconds 		
Decoder Off	<ul style="list-style-type: none"> KDC is ready to use KDC wakes up with a command from the host or a button event Decoder is off when the timeout has occurred (5 minutes) It takes about 500ms to start decoding 	< (80uA ~ 3mA)	KDC30 KDC30OP KDC270C KDC470C
Sleep	<ul style="list-style-type: none"> KDC is ready to use It takes 150ms to wake up from sleep mode KDC wakes up with a command from the host or a button event KDC transits into a sleep mode when the sleep timeout has occurred 	< (80uA ~ 10mA)	All
Power On	<ul style="list-style-type: none"> KDC is fully ready to use To power ON the KDC, press and hold the SCAN + DOWN buttons for more than 3 seconds (KDC20, 30, 350, 270, 470) or Slide power switch on (KDC400 only) or press and hold the both SCAN buttons for more than 3 seconds. (KDC500 only) KDC30OP, KDC270 and KDC470 power are also powered on with press and hold the SCAN button only for more than 3 seconds. 	< (40mA ~ 100mA)	All

Note: KDC100/200/250/300 doesn't have power off state.

19. Appendix I – KDC470 specific features

19.1 Connection method with a PC

The KDC470 automatically sets up a communication path between itself and the PC when the KDC470 is plugged in via USB cable. By pressing the DOWN button for 3 seconds, the KDC470 toggles the communication path between the PC and smart device.

19.2 Smart device charging method

It is possible to charge a smart device and the KDC470 at the same time by via USB cable or using a charging cradle.

Other than using an external power source, the KDC470 can charge a smart device when a smart device battery is almost drained and KDC470 battery is almost full. The KDC470 starts to charge a smart device from KDC470 battery by pressing the DOWN button for 3 seconds. Press the DOWN button for 3 seconds again to stop the KDC470 from charging the smart device. Please note that the KDC470 won't start charging if its battery capacity is lower than 40% and stops charging automatically when its battery goes to below 20%.

19.3 Configuring SCAN buttons

The KDC470 has two scan buttons (Main scan buttons) and provides an additional two scan buttons (Case scan buttons) on certain smart device cases. By default, both main and case scan buttons are enabled. However, the user can enable or disable those buttons via special barcodes.

1D – KDC470L/D

Enable both scan buttons  5X000	Enable main scan buttons  5X001
Enable case scan buttons  5X002	

2D – KDC470C

Enable both scan buttons  τMKDC5X000.	Enable main scan buttons  τMKDC5X001.
Enable case scan buttons  τMKDC5X002.	